

AperTO - Archivio Istituzionale Open Access dell'Università di Torino

Evaluation of two composting strategies for making pig slurry solid fraction suitable for pelletizing

This is the author's manuscript

Original Citation:

Availability:

This version is available <http://hdl.handle.net/2318/1599825> since 2017-05-25T14:00:54Z

Published version:

DOI:10.1016/j.apr.2015.10.001

Terms of use:

Open Access

Anyone can freely access the full text of works made available as "Open Access". Works made available under a Creative Commons license can be used according to the terms and conditions of said license. Use of all other works requires consent of the right holder (author or publisher) if not exempted from copyright protection by the applicable law.

(Article begins on next page)

This is the author's final version of the contribution published as:

Pampuro, Niccolò; Dinuccio, Elio; Balsari, Paolo; Cavallo, Eugenio.
Evaluation of two composting strategies for making pig slurry solid fraction
suitable for pelletizing. *ATMOSPHERIC POLLUTION RESEARCH*. 7 (2)
pp: 288-293.
DOI: 10.1016/j.apr.2015.10.001

The publisher's version is available at:

<http://linkinghub.elsevier.com/retrieve/pii/S1309104215000586>

When citing, please refer to the published version.

Link to this full text:

<http://hdl.handle.net/>

Atmospheric Pollution Research

Evaluation of two composting strategies for making pig slurry solid fraction suitable for pelletizing --Manuscript Draft--

Manuscript Number:	APR-D-15-00066R1
Full Title:	Evaluation of two composting strategies for making pig slurry solid fraction suitable for pelletizing
Article Type:	Research Paper
Keywords:	carbon dioxide; methane; nitrous oxide; ammonia; swine solid fraction.
Corresponding Author:	Niccolò Pampuro alInstitute for Agricultural and Earth Moving Machines (IMAMOTER), Italian National Research Council (CNR) ITALY
Corresponding Author Secondary Information:	
Corresponding Author's Institution:	alInstitute for Agricultural and Earth Moving Machines (IMAMOTER), Italian National Research Council (CNR)
Corresponding Author's Secondary Institution:	
First Author:	Niccolò Pampuro
First Author Secondary Information:	
Order of Authors:	Niccolò Pampuro Elio Dinuccio Paolo Balsari Eugenio Cavallo
Order of Authors Secondary Information:	
Abstract:	<p>In this study, pig solid fraction (SF) was composted aiming at obtaining a composted manure with a moisture content <40% - suitable for pelletizing. Six identical SF windrows of approximately 4 m³ and 1800 kg were set up outside, on a concrete pad in an open-sided, roofed facility, and composted for a period of 72 days. During the experimental period, three SF windrows were composted unturned (NTW), while the others three SF windrows were turned (TW) six times: at day 7, 16, 28, 35, 50 and 57. Carbon dioxide (CO₂), methane (CH₄), nitrous oxide (N₂O) and ammonia (NH₃) emissions were measured three times a week for the first 3 weeks and twice per week thereafter for the 72 days of composting. In correspondence of each turning operation, gases emissions rates from TW, were evaluated two times: before and immediately after turning. Due to the production of heat generated during the composting process, high losses of water occurred from both NTW and TW. However, at the end of the trial the average moisture content was significantly lower in TW than in NTW. We conclude that composting of pig SF in turned windrows represents a valuable process to concentrate the nutrients in manure and make it suitable for pelletizing, reducing the moisture content from 73.4% to 34.6%. However, in terms of CO₂-eq, total gaseous emissions recorded over 72 days of trial from TW (120.43 kg CO₂-eq. t⁻¹) were approximately 95% higher as compared to those (64.71 kg CO₂-eq. t⁻¹) obtained from NTW.</p>
Corresponding Author E-Mail:	n.pampuro@ima.to.cnr.it
Other Authors:	Elio Dinuccio Paolo Balsari Eugenio Cavallo

Photograph of the Corresponding Author
[Click here to download Photograph of the Corresponding Author: Pampuro.jpg](#)



1
2
3 **Evaluation of two composting strategies for making pig slurry solid fraction**
4 **suitable for pelletizing**
5
6

7
8 Niccolò Pampuro^{a*}, Elio Dinuccio^b, Paolo Balsari^b and Eugenio Cavallo^a
9

10
11
12 ^aInstitute for Agricultural and Earth Moving Machines (IMAMOTER), Italian National Research
13 Council (CNR) – Strada delle Cacce, 73 – 10135 Torino (TO), Italy
14
15

16
17
18 ^bDepartment of Agriculture, Forestry, Environmental and Land Based Economics (DEIAFA)
19
20 Mechanics Section, Turin University – Largo Paolo Braccini, 2 – 10095 Grugliasco (TO), Italy
21
22
23

24
25
26
27 *Corresponding Author: Niccolò Pampuro, Tel: +39-0113977723, Fax: +39-0113489218, E-mail:

28
29 n.pampuro@ima.to.cnr.it
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Abstract

In this study, pig solid fraction (SF) was composted aiming at obtaining a composted manure with a moisture content <40% - suitable for pelletizing. Six identical SF windrows of approximately 4 m³ and 1800 kg were set up outside, on a concrete pad in an open-sided, roofed facility, and composted for a period of 72 days. During the experimental period, three SF windrows were composted unturned (NTW), while the others three SF windrows were turned (TW) six times: at day 7, 16, 28, 35, 50 and 57. Carbon dioxide (CO₂), methane (CH₄), nitrous oxide (N₂O) and ammonia (NH₃) emissions were measured three times a week for the first 3 weeks and twice per week thereafter for the 72 days of composting. In correspondence of each turning operation, gases emissions rates from TW, were evaluated two times: before and immediately after turning. Due to the production of heat generated during the composting process, high losses of water occurred from both NTW and TW. However, at the end of the trial the average moisture content was significantly lower in TW than in NTW. We conclude that composting of pig SF in turned windrows represents a valuable process to concentrate the nutrients in manure and make it suitable for pelletizing, reducing the moisture content from 73.4% to 34.6%. However, in terms of CO₂-eq, total gaseous emissions recorded over 72 days of trial from TW (120.43 kg CO₂-eq. t⁻¹) were approximately 95% higher as compared to those (64.71 kg CO₂-eq. t⁻¹) obtained from NTW.

Key words: Carbon dioxide; methane; nitrous oxide; ammonia; swine solid fraction.

1. Introduction

In Italy, as well as in many European countries, the pig farming has experienced a major shift toward intensification in recent years (ISTAT, 2012). As a result of intensified livestock operations, huge volumes of liquid (slurry) manure are produced (approx. 17 million tons per year; Colonna and Alfano, 2010), often in far greater amounts than those which can be used in the available farmland where the animals are raised. This could cause adverse environmental consequences (Rao

1 et al., 2007) such as nitrate water pollution both in surface and in ground waters, especially in areas
2 classified as Nitrate Vulnerable Zones in accordance with European Regulation (91/676/CEE).
3

4 Consequently, there is a growing need to adopt slurry treatment technologies to optimize the
5 management of the large amount of manure generated and to reduce potential risks of
6 environmental pollution.
7
8
9

10 In this context, the conversion of separated solid fraction (SF) from pig slurry to dried pellets
11 represents an increasingly popular option for farmers in the management of manure. According to
12 Pampuro et al. (2013) this process has the potential to increase the bulk density of SF from an initial
13 value of 400-450 kg m⁻³ to a final one of more than 1000 kg m⁻³. This allows better handling and
14 transportation of SF at further distance (even at hundreds of km as order of magnitude) in order to
15 move N (nitrogen) from Nitrate Vulnerable Zones to others which are not vulnerable. Furthermore,
16 pelletization could be a valuable process to homogenize, standardize and concentrate the nutrients
17 in the SF, improving at the same time the uniformity of its fertilizing and amending actions
18 (Romano et al., 2014).
19
20
21
22
23
24
25
26
27
28
29
30
31
32

33 A key part of this technology is the composting of fresh SF, in order to stabilize manure (e.g.,
34 converting readily available N to more stable organic N) and remove odours and pathogens (Nolan
35 et al., 2011; Parkinson et al., 2004). The heat generated by composting also allows the drying
36 needed to make manure suitable for pelletizing. According to Alemi et al. (2010) the optimal
37 moisture content of SF to be used for pelletization varies between 20% (for a disk pelletter) and 35-
38 40% (for an extruder). Composting of SF involves its storage in a windrow that can be turned or not
39 turned. Frequent turning allows aeration of piles, fragmentation of large particles and reduction of
40 composting times (Szanto et al., 2007). However, composting of manure has been identified as a
41 significant source of harmful gases such as carbon dioxide (CO₂), methane (CH₄), nitrous oxide
42 (N₂O) and ammonia (NH₃) (e.g., Fukumoto et al., 2003; Dinuccio et al., 2008). CO₂, CH₄ and N₂O
43 are greenhouse gases (GHG) and are recognized as contributing to the greenhouse effect (IPCC,
44 2013). NH₃ can cause eutrophication and acidification of soils (Pearson and Stewart, 1993) and also
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 indirectly contributes to N₂O emissions by increasing the N-cycling in natural ecosystem (IPCC,
2 2013). Furthermore, high NH₃ and N₂O volatilization impacts negatively the manure composting
3 process, by decreasing N concentration and hence compost quality (Bernal et al., 2009). Some
4 studies investigated gaseous emissions during storage of pig solid manure heaps (e.g., Hassouna et
5 al., 2008; Petersen and Sørensen, 2008; Dinuccio et al., 2012). However, to our knowledge, NH₃
6 and GHG (N₂O, CO₂ and CH₄) losses during composting of pig slurry SF for pellet production have
7 had limited investigation, and the effect of turning the pig slurry SF during composting on gaseous
8 emissions is also little known.

9 In this study, pig slurry SF was composted in windrows aiming at obtaining a composted SF with a
10 moisture content < 40% - suitable for pelletizing. The objective of the study was to investigate the
11 effects of two different composting strategies (turned and not turned) on i) manure physicochemical
12 characteristics and ii) NH₃ and GHG (CO₂, CH₄ and N₂O) emissions during composting.
13
14
15
16
17
18

19 **2. Materials and Methods**

20 The trial was carried out at Institute for Agricultural and Earth Moving Machines (IMAMOTER) –
21 Italian National Research Council (CNR) - in Turin, Italy (44°57' N, 7°36' E, 245 m above sea
22 level). The SF used for the experiment was obtained by processing about 100 m³ of fresh raw slurry
23 from a fattening pig farm, by means of a screw press separator (Chior, mod. COM300/600).
24
25
26
27
28
29

30 Six identical SF windrows were set up outside, on a concrete pad in an open-sided, roofed facility,
31 and composted for a period of 72 days. Each windrow (1800 kg mass, 4.0 m³ volume) was
32 trapezoidal in shape, about 6 m in base-length and 1 m in height. During the experimental period,
33 three SF windrows were composted unturned (NTW), while the other three SF windrows were
34 turned (TW) six times: at day 7, 16, 28, 35, 50 and 57.
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55

56 **2.1. Temperature monitoring**

57 The temperature of each SF windrow was continuously recorded with three sets of thermocouple
58 sensors (Type K) connected to a multichannel acquisition system (Grant, mod. SQ 1600). Each set
59
60
61
62
63
64
65

1 was made up of two thermocouples: one (T1) placed at a depth of 0.2 m and the other one (T2) at
2 0.6 m from the surface of the windrow. Daily air temperature was also monitored and recorded.
3

4 **2.2. Manure sampling and analysis**

5
6
7 At the beginning and at the end of the trial, samples from bottom, surface, sides and centre of each
8
9 windrow were taken and mixed together to make them representative of the composting windrow
10
11 (Getahun et al., 2012). During the experimental period, composite samples were also taken at five
12
13 random locations from each turned windrow in correspondence of the turning operations. All
14
15 collected samples were analyzed for pH, moisture content, volatile solids (VS), total organic carbon
16
17 (TOC), total extractable carbon (TEC), total nitrogen (TN), total ammoniacal nitrogen (TAN),
18
19 nitrate nitrogen (NO₃-N), C/N ratio and Humification Ratio (HR). Hanna HI 9026 portable pH
20
21 meter fitted with a glass electrode combined with a thermal automatic compensation system was
22
23 used to measure pH. Moisture content was measured by drying the samples at 105°C for 24 h.
24
25 Volatile solids content was calculated based on mass loss after heating at 550°C for 4 h. Samples
26
27 for TOC analysis were prepared by drying the samples at 105°C for 24 h, followed by treatment
28
29 with sulphuric acid (H₂SO₄) to eliminate any inorganic C, with subsequent analysis on a C analyzer
30
31 (Carlo Erba Instruments). Total extractable carbon was determined according to the methodology
32
33 reported by Romero et al. (2007). Total nitrogen and TAN were determined using the Kjeldahl
34
35 standard method (AOAC, 1990) and nitrate nitrogen was determined by ion chromatography
36
37 (Dionex-4000i, Dionex, USA). Humification Ratio was calculated according to the following
38
39 equation (Roletto et al., 1985):
40
41
42
43
44
45
46
47

$$48 \text{HR (\%)} = (\text{TEC} / \text{TOC}) \times 100 \quad [1]$$

49
50

51 **2.3. Gaseous emission measurements**

52
53 CO₂, CH₄, N₂O and NH₃ emissions from NTW were measured three times a week for the first 3
54
55 weeks and then twice a week for the following 7 weeks, for a total of 23 times during the 72-day
56
57 experimental period. For TW CO₂, CH₄, N₂O and NH₃ emissions were measured according to the
58
59 same schedule as for NTW. However, in correspondence of each turning operation, gases emissions
60
61
62
63
64
65

1 rates from TW were evaluated before turning and immediately after turning. Therefore, for the latter
2 manure composting strategy, a total of 29 measurement sessions per each investigated gas were
3 completed.
4

5
6
7 NH₃ emissions were measured by wind tunnels and according to the flux measurement procedure
8 described by Dinuccio et al. (2012). Three wind tunnels per windrow were used. Each wind tunnel
9 covered a surface of 0.32 m² (0.80 m length x 0.40 m width). During measurement a fan was linked
10 to the tunnel through a flexible pipe to produce an air flow of about 0.6 m s⁻¹ over the emitting
11 surface. Each sampling lasted 24 h. Emissions of CO₂, CH₄ and N₂O from the SF windrows were
12 measured according to the same schedule as ammonia emission measurements, using static closed
13 chamber technique. At each sampling time, three polyvinyl chloride chambers (volume 0.021 m³,
14 surface area 0.138 m²) were evenly placed over surface of each investigated windrow. Thirty mL of
15 air was drawn with a plastic syringe from the chamber headspace at 0, 10 and 20 min after chamber
16 placement. According to the experimental design as explained above, a total of 468 gas samples
17 were collected, 261 of which from TW, and 207 from NTW. All samples were stored in airtight
18 glass vials and analyzed for CO₂, CH₄ and N₂O within 24 h by gas chromatography (Agilent 7890).
19
20 The gas chromatograph (GC) was equipped with a thermal conductivity (TCD), a flame ionization
21 (FID) and an electron capture (ECD) detectors for determination of CO₂, CH₄ and N₂O
22 concentrations, respectively. Helium (He) and a gas mixture of argon and methane (Ar-CH₄) were
23 used as the carrier gas for CO₂/CH₄ and N₂O, respectively. The concentrations of each GHG (CO₂,
24 CH₄ and N₂O) were plotted over time, the data were then fitted to a 1st degree equation (C= ax + b,
25 where C is the concentration of gases and x is the time in minutes) or 2nd degree polynomial
26 equation (C= ax² + bx + c) (Hutchinson and Livingston, 1993)", the slop of which gave the relative
27 change in concentrations per chamber volume and minute. Gas fluxes F in mg m⁻² min⁻¹ were
28 determined according to:
29

$$30 \quad F = (dC_{\text{gas}}/dt) \times (V/A) \quad [2]$$

31 where:

1 dC_{gas}/dt is the change of CO₂, CH₄ or N₂O concentration in the chamber in mg min⁻¹; V is the
2 chamber volume in m³ and A is the area covered by the chamber in m². Cumulative emissions were
3 approximated by assuming that daily fluxes represented the average flux between each
4 measurement.
5
6
7
8

9 Total gaseous losses were expressed in CO₂-eq using conversion factors of 1, 28, 265 and 2.65,
10 respectively for CO₂, CH₄, N₂O and NH₃ (IPCC, 2013).
11
12
13

14 **2.4. Statistical analysis**

15
16 Data were subjected to statistical analysis using SPSS software version 21 for Windows (SPSS,
17 2012). One-way analysis of variance (ANOVA) was performed to compare variations in compost
18 parameters and gaseous emissions. Data distribution normality and assumption of equal variance
19 was checked using the Shapiro-Wilk and Levene test, respectively.
20
21
22
23
24
25
26
27

28 **3. Results and discussion**

29 **3.1. Composting trial**

30
31 The air temperature and the temperature inside the windrows as a function of time is shown in
32 Figure 1. The average daily air temperature recorded during the experimental period was 23.5°C,
33 with a measured maximum of 27.8°C and minimum of 18.8°C. The temperature profiles (Figure 1)
34 of the SF windrows followed the expected trends (e.g., Luo et al., 2008; Dinuccio et al., 2012)
35 suggesting that the manure was easily compostable.
36
37
38
39
40
41
42
43
44
45

46 The average temperature of SF windrows rose to approximately 55°C during the first 6-7 days from
47 their establishment. After this peak, the average temperature gradually decreased to approximately
48 40.0°C at day 45 and day 55, respectively, for NTW and TW, indicating the end of the thermophilic
49 phase (Bernal et al., 2009). In TW the average temperature rose again after turning operation
50 (Figure 1) due to the increased levels of oxygen that stimulate microbial activity (Getahun et al.,
51 2012). However, from day 55 until the end of the experiment (day 72) the average daily
52 temperatures measured inside TW resulted not significantly different ($p>0.05$) than those recorded
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2 in NTW. The highest temperatures were measured at 0.6 m depth in all windrows, with maximum
3 recorded values of 65.9°C and 70.1°C, respectively, for NTW and TW.

4
5 The solid fraction of pig manure was characterized by an initial moisture content of 73.4% (Table
6
7 1), above the optimal range of 50-60% (Bernal et al., 2009). Similar values were found by
8
9 Chiumenti et al. (2007) during composting of pig manure. This characteristic could negatively
10
11 affect air diffusion into the windrow by the chimney effect, a relevant aspect during the
12
13 thermophilic phase (Chiumenti et al., 2007). As expected, due to the production of heat during the
14
15 composting process (Figure 1), high losses of water occurred from both NTW and TW (Table 1,
16
17 Figure 2A). However, at the end of the trial the average moisture content was significantly ($p<0.05$)
18
19 lower in TW than in NTW (34.6 % vs 46.7 %, $p<0.05$) (Table 1), consistent with the significantly
20
21 ($p<0.05$) higher average temperature recorded over the trial in TW than in NTW.

22
23
24 The pH decreased during the composting process in both TW and NTW (Table 1), in agreement
25
26 with the findings from other studies (e.g., Ko et al., 2008; Ogunwande et al., 2008; Getahun et al.,
27
28 2012). However, TW maintained pH alkaline (range 7.5–8.0) during composting (Figure 2B), while
29
30 NTW strategy significantly ($p<0.05$) reduced pH from alkaline to slightly acidic (8.4 at day 0 vs 6.9
31
32 at day 72) (Table 1). A likely explanation is the production of organic acids in anaerobic conditions
33
34 caused by the absence of turning operations (Shen et al., 2011).

35
36
37 TOC content also decreased over time (Table 1, Figure 2C) due to the degradation of organic
38
39 material (Getahun et al., 2012), whereas VS (Table 1, Figure 2D) and TN (Table 1, Figure 2E)
40
41 concentration increased substantially due to the concentration effect caused by the high water
42
43 evaporation (Bernal et al., 2009). Similar results were found by Paredes et al. (1996) during
44
45 composting of different organic wastes. Specifically, relative to the fresh SF (day 0), the
46
47 concentration of VS and TN in the composted manure at the end of the trial (day 72) resulted,
48
49 respectively, 1.25 and 3.60 times higher for NTW, and respectively 1.31 and 4.25 times higher for
50
51 TW (Table 1). After 72 days of composting (end of trial) the concentration of TOC and TAN
52
53 resulted significantly ($p<0.05$) higher in TW than in NTW (Table 1).
54
55
56
57
58
59
60
61
62
63
64
65

Stability and quality of the final products

As stated by Bernal et al. (2009), the principal requirement of a compost for it to be safely used in soil is a high degree of stability or maturity, which implies a stable Organic matter content and the absence of phytotoxic compounds and plant or animal pathogens. Maturity is associated with plant-growth potential or phytotoxicity (Iannotti et al., 1993), whereas stability is often related to the compost's microbial activity (Bernal et al., 2009). However, both stability and maturity usually go hand in hand, since phytotoxic compounds are produced by the microorganisms in unstable composts (Zucconi et al., 1985). For this reason compost maturity and stability are often used interchangeably. Chemical methods, including C/N ratio in the solid phase (Bernal et al., 1998) and nitrification (TAN and nitrate nitrogen concentration; Ko et al., 2008) are generally used to assess the degree of compost maturation.

In our study, the C/N ratio decreased from 33.3 at day to 12.0 and 10.8 at 72 days for NTW and TW, respectively (Table 1, Figure 2H). Previous research showed that a C/N ratio below 20 was assumed to be indicative of maturity compost (Bernal et al., 1998; Ko et al., 2008).

Ammonium and nitrate nitrogen concentrations provided some indication of compost maturity, because the concentration of nitrate should be higher than that of ammonium at the end of composting process. As shown in Table 1, at the end of the experimental period, the concentration of NO₃-N was higher than that of TAN for TW, while, for NTW, we found a concentration of NO₃-N lower than that of TAN. In TW, the initially high ammonium level dropped rapidly during composting (Figure 2F), while nitrate concentration increased significantly after 36 days (Figure 2G). This result could be explained by the fact that bacteria responsible for nitrification were strongly inhibited by temperature greater than 40°C (Jimenez and Garcia, 1989), so nitrate concentration did not change greatly during the active composting stage.

The evaluation of the humification degree of the OM during composting is an agronomic criterion for compost quality. The agricultural value of a compost increases when the OM reaches a high level of humification. As stated by Senesi (1989), the humification of the OM during composting is

1 revealed by the formation of humic acids. During composting, humic substances (C_{EX}) are produced
2 and humic acid-like organic-C (C_{HA}) increases, while fulvic acid-like organic C (C_{FA}) decrease due
3 to microbial degradation. According to Bernal et al. (2009) an HR higher than 7 indicates a good
4 degree of humification: at the end of the composting process NTW achieved HR equal to 13.7,
5 while TW was characterized by HR equal to 15.1.
6
7
8
9
10

11 **3.2. Gaseous emissions**

12 In agreement with other published data (e.g., Sommer and Moller, 2000; Dinuccio et al., 2012), the
13 emissions of CO_2 , CH_4 , N_2O and NH_3 took place primarily during the thermophilic phase (Figure
14 3), when microbial activity reached its maximum.
15
16
17
18
19
20

21 The patterns of CO_2 emission (Figure 3A) observed in this study resemble those reported by
22 Chiumenti et al. (2007). Specifically, CO_2 emission rates were significantly ($p < 0.05$) greater for
23 TW than NTW during early composting (day 0–37), but there were no significant ($p > 0.05$)
24 difference during late composting (day 42–72). Total CO_2 emissions recorded over 72 days of trial
25 were approximately 2 times higher from TW than NTW (Table 2), reflecting the highest microbial
26 activity and organic matter degradation (Table 1).
27
28
29
30
31
32
33
34
35

36 The dynamic of CH_4 emissions was also influenced by turning operations (Figure 3B). As expected,
37 CH_4 emission rate decreased immediately after turning operations as a result of the adequate
38 aeration of the windrows (Figure 3B). However, in the interval between turnings, the intense
39 aerobic activity determined a decrease of oxygen concentration that promoted anaerobic conditions
40 and hence the production of methane (Sommer and Moller, 2000; Chiumenti et al., 2007).
41
42
43
44
45
46
47

48 Fukumoto et al. (2003) showed that the size of the anaerobic portion established inside the compost
49 piles decreased and ultimately disappeared as the composting material matured. In this study, CH_4
50 emission in TW decreased earlier than in NTW (Figure 3B), suggesting that in TW the length of
51 time until the anaerobic portions disappeared was probably smaller. In spite of this, cumulative CH_4
52 emissions from the tested manure were not affected significantly ($p > 0.05$) by turning operations
53 (Table 2). Total CH_4 emissions represented a loss of 0.29% and 0.30% of the initial VS content in
54
55
56
57
58
59
60
61
62
63
64
65

1 manure (Table 2) for TW and NTW, respectively; values that agreed well with those reported by
2 Hansen et al. (2006) from storage of uncovered pig slurry SF piles.
3
4 The production of N₂O (Figure 2C) indicated that during composting, incomplete
5 nitrification/denitrification processes - that normally convert NH₄ into N₂, a non-polluting gas
6
7 (Yang et al., 2013) - occurred. On average, N₂O flux rates from TW and from NTW were,
8
9 respectively, 11.1 (range 0.99–60.1) and 1.72 (range 0.29–3.69) mg N₂O m⁻² h⁻¹. The total nitrogen
10
11 loss via N₂O pathway from TW accounted for almost 1% of the initial nitrogen content in manure
12
13 (Table 2). Turning the material significantly (p<0.05) increased N₂O emission rates (Figure 2C),
14
15 probably because NO₂⁻/NO₃⁻ produced in O₂ sufficient region was transferred to O₂ deficient region,
16
17 thereby promoting N₂O production by denitrification process (Fukumoto et al., 2003). Similar high
18
19 N₂O emission rates from active aeration composting systems were also observed by Abd El Kader
20
21 et al. (2007) and by Ahn et al. (2011). As can be seen in Figure 3D, NH₃ emissions across all
22
23 treatments peaked at the beginning of the trials and then decreased rapidly, resulting in very low
24
25 values within 7 days. After the first turning operation, NH₃ emissions from TW increased to an
26
27 average value of 0.11 gNH₃ m⁻² h⁻¹ (Figure 3D). Thereafter, with the exhaustion of easily
28
29 degradable materials, the degradation rate decreased and consequently the NH₃ emission declined to
30
31 negligible values (Jiang et al., 2013). While not significant (p>0.05), cumulative NH₃ emissions
32
33 recorded from TW, expressed as g NH₃ t⁻¹ of fresh manure, were 11.2% higher than those recorded
34
35 from NTW (Table 2). The cumulative N losses as NH₃ recorded over the experimental period
36
37 (Table 2) were in a good agreement with the overall losses (6.5-7.3%) from the initial TN content
38
39 recorded by Hassouna et al. (2008) during uncovered storage of turned and unturned pig slurry solid
40
41 manure heaps.
42
43
44
45
46
47
48
49
50
51

52 **3.3. Mass balance**

53
54 The data in Table 3 show the quantities of the swine SF at the beginning and at the end of the
55
56 composting process, considering total solids, volatile solids, total nitrogen and total organic carbon.
57
58
59
60
61
62
63
64
65

1 The results show a mass loss of 66% and 78% of the initial manure for NTW and TW, respectively.

2 These losses are mainly related to the decrease of moisture (Table 1) that took place during the
3 composting process. In terms of dry matter, 32% (NTW) and 46% (TW) of the initial quantity was
4 lost, while a VS losses of 15.4% (NTW) and 28.7% (TW) were calculated. These results are in line
5 with the higher carbon emissions as CO₂ observed from TW than from NTW.
6
7

8 The carbon losses represented a loss of 64% (NTW) and 85% (TW) of the initial carbon content of
9 the solid manure. Carbon losses from NTW were in a good agreement with the observations of
10 Chiumenti et al. (2007), while the carbon losses from TW were higher than those found by this
11 author.
12
13

14 We calculated the TN balance and found a difference in TN recovery of 11 and 42% of the initial
15 TN content for NTW and TW respectively. The measured nitrogen gas emissions (NH₃ and N₂O)
16 represent 6.3% (NTW) and 8.4% (TW) of the initial nitrogen content. The fraction of nitrogen
17 unaccounted for (4.7% and 33.6% for NTW and TW respectively) can be associated with N₂
18 emissions (Hassouna et al., 2008). Leached nitrogen and the measurement error may also partly
19 explain this difference. Nitrogen losses of NTW (11% of the initial nitrogen content) and of TW
20 (42% of the initial nitrogen content) were, respectively, in the lower and higher range of the values
21 given by Moller et al. (2000), which varied between 10 and 42%.
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42

43 **4. Conclusions**

44 In accordance with the results of the investigation we conclude that composting of pig SF in turned
45 windrows represents a valuable process to concentrate the nutrients in manure and make it suitable
46 for pelletizing, reducing the moisture content from 73.4% to 34.6%. However, in terms of CO₂-eq,
47 total gaseous emissions recorded over 72 days of trial from TW (120.43 kg CO₂-eq. t⁻¹) were
48 approximately 95% higher as compared to those (64.71 kg CO₂-eq. t⁻¹) obtained from NTW.
49
50
51
52
53
54
55
56
57

58 However a comprehensive assessment requires a whole-system approach which considers
59
60
61
62
63
64
65

1 not only composting but also emissions after soil application. Experiments under laboratory-scale
2 conditions will be conducted on the application of pelletized composted manure.
3
4
5

6 7 **Acknowledgements** 8

9
10 This work was carried out within the framework of the “FITRAREF” project, funded by the Italian
11 Ministry of Agriculture and Forestry (Call OIGA, 2009).
12
13
14

15 16 17 **References** 18

19
20 Abd El Kader, N., Robin, P., Paillat, J.M., Leterme, P., 2007. Turning, compacting and the addition
21 of water as factors affecting gaseous emissions in farm manure composting. *Bioresource*
22 *Technology* 98, 2619-2628.
23
24

25
26
27 Ahn, H.K., Mulbry, W., White, J.W., Kondrad, S.L., 2011. Pile mixing increases greenhouse gas
28 emissions during composting of dairy manure. *Bioresource Technology* 102, 2904-2909.
29

30
31 Alemi, H., Kianmehr, M.H., Borghae, A.M., 2010. Effect of pellet processing of fertilization on
32 slow-release nitrogen in soil. *Asian Journal of Plant Sciences* 9(2), 74-80.
33
34

35
36
37 AOAC, 1990. Association of Official Analytical Chemist, Official Methods of Analysis, 15th edn.
38 Association of Official Analytical Chemist, Washington, DC.
39

40
41
42 Bernal, M.P., Paredes, C., Sanchez-Monedero, M.A., Cegarra, J., 1998. Maturity and stability
43 parameters of composts prepared with a wide range of organic wastes. *Bioresource Technology* 63,
44 91-99.
45
46

47
48
49 Bernal, M.P., Albuquerque, J.A., Moral, R., 2009. Composting of animal manures and chemical
50 criteria for compost maturity assessment. A review. *Bioresource Technology* 100, 5444-5453.
51

52
53
54 Chiumenti, A., Da Borso, F., Rodar, T., Chiumenti, R., 2007. Swine manure composting by means
55 of experimental turning equipment. *Waste Management* 27, 1774-1782.
56
57

58
59 Colonna, N., Alfano, V., 2010. Quanto biogas si può produrre in Italia (How much biogas can be
60 produced in Italy). *L'Informatore Agrario 11, Supplemento Energia Rinnovabile*. pp. 13-17.
61
62

1
2 Dinuccio, E., Berg, W., Balsari, P., 2008. Gaseous emissions from the storage of untreated slurries
3 and the fractions obtained after mechanical separation. *Atmospheric Environment* 42, 2448-2459.

4
5 Dinuccio, E., Gioelli, F., Balsari, P., Dorno, N., 2012. Ammonia losses from the storage and
6 application of raw and chemo-mechanically separated slurry. *Agriculture, Ecosystems &*
7
8
9 *Environment* 153, 16-23.

10
11 Fukumoto, Y., Osada, T., Hanajima, D., Haga, K., 2003. Patterns and quantities of NH₃ and CH₄
12 emissions during swine manure composting without forced aeration-effect of compost pile scale.
13
14
15
16 *Bioresource Technology* 89, 109-114.

17
18
19 Getahun, T., Nigusie, A., Entele, T., Van Gerven, T., Van der Bruggen, B., 2012. Effect of turning
20 frequencies on composting biodegradable municipal solid waste quality. *Resources, Conservation*
21
22
23
24 *and Recycling* 65, 79-84.

25
26 Gomez-Bandon, M., Lazcano, C., Dominguez, J., 2008. The evaluation of stability and maturity
27 during the composting of cattle manure. *Chemosphere* 70, 436-444.

28
29
30 Hansen, M.N., Henriksen, K., Sommer, S.G., 2006. Observations of production and emission of
31 greenhouse gases and ammonia during storage of solids separated from pig slurry: effects of
32 covering. *Atmospheric Environment* 40, 4172-4181.

33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

1
2 Midgley (eds.)). Cambridge University Press, Cambridge, United Kingdom and New York, NY,
3 USA, 1535 pp.

4 ISTAT – Italian National Institute of Statistics (2012). Preliminary results of the 6th general census
5 of agriculture. <http://censimentoagricoltura.istat.it> [accessed march 2012].
6

7
8
9 Jiang, T., Schuchardt, F., Li, G.H., Guo, R., Luo, Y.M., 2013. Gaseous emission during the
10 composting of pig feces from Chinese. *Chemosphere* 90, 1545-1551.
11

12
13 Jimenez, E.I., Garcia, V.P., 1989. Evaluation of city refuse compost maturity: a review. *Biological*
14
15
16
17
18 *Wastes* 27, 115-142.

19 Ko, H.J., Kim, K.Y., Kim, H.T., Kim, C.N., Umeda, M., 2008. Evaluation of maturity parameters
20 and heavy metal contents in composts made from animal manure. *Waste Management* 28, 813-820.
21

22
23 Luo, W., Chen, T.B., Zheng, G.D., Gao, D., Zhang, Y.A., Gao, W., 2008. Effect of moisture
24 adjustments on vertical temperature distribution during forced-aeration static-pile composting of
25 sewage sludge. *Resources, Conservation and Recycling* 52, 635-642.
26
27

28
29 Moller, H.B., Sommer, S.G., Andersen, B.H., 2000. Nitrogen mass balance in deep litter during the
30 pig fattening cycle and during composting. *Journal of Agricultural Science* 135, 287-296.
31
32

33
34 Nolan, T., Troy, S.M., Healy, M.G., Kwapinski, W., Leahy, P.G., Lawlor, J.J., 2011.

35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

A., (Eds.), *Progress in Nitrogen Cycling Studies*. Kluwer Academic Publishers, Dordrecht, pp. 121-125.

Parkinson, R., Gibbs, P., Burchett, S., Misselbrook, T., 2004. Effect of turning regime and seasonal weather conditions on nitrogen and phosphorus losses during aerobic composting of cattle manure. *Bioresource Technology* 91,171-178.

Pearson, J., Stewart, G.R., 1993. The deposition of atmospheric ammonia and its effects on plants. *New Phytologist* 125, 283-305.

Petersen, J., Sørensen, P., 2008. Loss of nitrogen and carbon during storage of the fibrous fraction of separated pig slurry and influence on nitrogen availability. *Journal of Agricultural Science* 146, 403–413.

Rao, J.R., Watabe, M., Stewart, T.A., Millar, B.C., Moore, J.E., 2007. Pelleted organo-mineral fertilizers from composted pig slurry solids, animal wastes and spent mushroom compost for amenity grassland. *Waste Management* 27, 1117-1128.

Roletto, E., Barberis, R., Consiglio, M., Jodice, R., 1985. Chemical parameters for evaluating compost maturity. *Biocycle* (March), 46-48.

Romano, E., Brambilla, M., Bisaglia, C., Pampuro, N., Foppa Pedretti, E., Cavallo, E., 2014. Pelletization of composted swine manure solid fraction with different organic co-formulates: effect of pellet physical properties on rotating spreader distribution patterns. *International Journal of Recycling of Organic Waste in Agriculture* 3, 101-111.

Romero, E., Plaza, C., Senesi, N., Nogales, R., Polo, A., 2007. Humic acid-like fractions in raw and vermicomposted winery and distillery wastes. *Geoderma* 139, 397-406.

Senesi, N., 1989. Composted materials as organic fertilisers. *Science of the Total Environment* 81/82, 521-542.

Shen, Y., Ren, L., Li, G., Chen, T., Guo, R., 2011. Influence of aeration on CH₄, N₂O and NH₃ emissions during aerobic composting of a chicken manure and high C/N waste mixture. *Waste Management* 31, 33-38.

1 Sommer, S.G., Moller, H.B., 2000. Emission of greenhouse gases during composting of deep litter
2 from pig production – effect of straw content. *Journal of Agricultural Science* 134(3), 327-335.
3

4 SPSS, 2012. IBM SPSS Statistics for Windows, Version 21.0. Armonk, NY: IBM Corp.
5

6 Szanto, G.L., Hamelers, H.V.M., Rulkens, W.H., Veeken, A.H.M., 2007. NH₃, N₂O and CH₄
7 emissions during passively aerated composting of straw-rich pig manure. *Bioresource Technology*
8
9 98, 2659-2670.
10
11

12 Yang, F., Li, G.X., Yang, Q.Y., Luo, W.H., 2013. Effect of bulking agents on maturity and gaseous
13 emissions during kitchen waste composting. *Chemosphere* 93, 1393-1399.
14
15

16 Zucconi, F., Monaco, A., Forte, M., de Bertoldi, M., 1985. Phytotoxins during the stabilization of
17 organic matter. In: Gasser, J.K.R. (Ed.), *Composting of Agricultural and Other Wastes*. Elsevier
18 Applied Science Publishers, Barking, pp. 73-85.
19
20

21 Zucconi, F., de Bertoldi, M., 1987. Compost specifications for the production and characterization
22 of compost from municipal solid waste. In: De Bertoldi, M, Ferranti, MP, L’Hermite, P, Zucconi, F
23 (Eds.), *Compost: Production, Quality and Use*. Elsevier, Barking, pp. 30-50.
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62

Table captions

Table 1. Chemical characteristics of fresh pig slurry solid fraction (Fresh SF) and of final composts obtained with two turning strategy (NTW=not turned windrows; TW=turned windrows). Mean value and standard error (in parentheses) of 3 replicates.

Table 2. Cumulative emissions of CO₂, CH₄, N₂O, and NH₃ recorded from turned (TW) and not turned (NTW) pig slurry solid fraction windrows. Mean value and standard error (in parentheses) of 3 replicates.

Table 3. Mass balance of the swine manure composting process (NTW=not turned windrows; TW=turned windrows). Mean value of 3 replicates.

Table 1.

Parameter	Fresh SF	Final Compost	
		NTW	TW
Moisture (%)	73.4 ^a (0.7)	46.7 ^b (1.8)	34.6 ^c (0.3)
pH	8.4 ^a (0.2)	6.9 ^b (0.1)	7.6 ^{ab} (0.2)
VS (%)	27.5 ^a (0.7)	34.3 ^b (0.7)	36.2 ^b (1.2)
TOC (%)	42.3 ^a (0.8)	38.1 ^b (0.4)	36.5 ^c (0.3)
TN (%)	0.8 ^a (0.1)	2.9 ^b (0.1)	3.4 ^c (0.1)
TAN (mg kg ⁻¹)	2643 ^a (115.7)	959 ^b (20.7)	570 ^c (6.9)
NO ₃ -N (mg kg ⁻¹)	1.3 ^a (0.1)	714 ^b (10.5)	1358 ^c (35.5)
C/N	33.3 ^a (1.6)	12.0 ^b (1.2)	10.8 ^b (1.4)
HR (%)	N.D.	13.7 (0.2)	15.1 (0.4)

In the same line, values with different letters are statistically different at $p < 0.05$.

Table 2.

Gas	Units	TW		NTW	
CO ₂	g t ⁻¹	61,196.05 ^a	(4,009.4)	34,711.19 ^b	(1,092.3)
	% VS	22.25	(1.5)	12.62	(0.4)
	kg CO ₂ -eq. t ⁻¹ (A)	61.20	(4.0)	34.71	(1.1)
CH ₄	g t ⁻¹	792.39 ^a	(155.8)	811.52 ^a	(40.3)
	% VS	0.29	(0.06)	0.30	(0.01)
	kg CO ₂ -eq. t ⁻¹ (B)	22.19	(4.4)	22.72	(1.1)
N ₂ O	g t ⁻¹	134.42 ^a	(4.3)	22.61 ^b	(5.2)
	% TN	1.68	(0.1)	0.28	(0.1)
	kg CO ₂ -eq. t ⁻¹ (C)	35.62	(1.1)	5.99	(1.4)
NH ₃	g t ⁻¹	537.08 ^a	(22.1)	482.96 ^a	(79.0)
	% TN	6.71	(0.3)	6.04	(0.9)
	kg CO ₂ -eq. t ⁻¹ (D)	1.42	(0.1)	1.28	(0.2)
Tot kg CO ₂ -eq. t ⁻¹ (A+B+C+D)		120.43 ^a	(7.2)	64.71 ^b	(1.4)

In the same line, values with different letters are statistically different at $p < 0.05$.

Table 3.

Parameter	Beginning of the process	End of the process					
		NTW			TW		
		Remaining	Lost		Remaining	Lost	
Initial load (kg)	1800	610	1190	66%	396	1404	78%
Total solids (kg)	478.8	325	153.8	32%	259	219.8	46%
Volatile solids (kg)	131.7	111.5	20.2	15.4%	93.8	37.9	28.7%
TOC (kg)	761.4	274.3	487.1	64%	144.5	646.9	85%
TN (kg)	23.4	20.9	2.5	11%	13.5	9.9	42%


Figure captions

Figure 1. Average environmental temperature and temperatures development at a depth of 0.2 m (T1) and 0.6 m (T2) inside the not turned (NTW) and the turned (TW) windrows (n=3). In TW, arrows mark time of turning.

Figure 2. Changes in content of moisture (A), pH (B), TOC (C), VS (D), TN (E), TAN (F), NO₃-N (G) and C/N (H) of the pig solid fraction during composting in TW. Error bars indicate standard error (n=3).

Figure 3. Emission fluxes of CO₂ (A), CH₄ (B), N₂O (C) and NH₃ (D) during the composting of pig slurry solid fraction in turned (TW) and not turned (NTW) windrows. Error bars indicate standard error (n=3). In TW, arrows mark time of turning.

Figure 1.

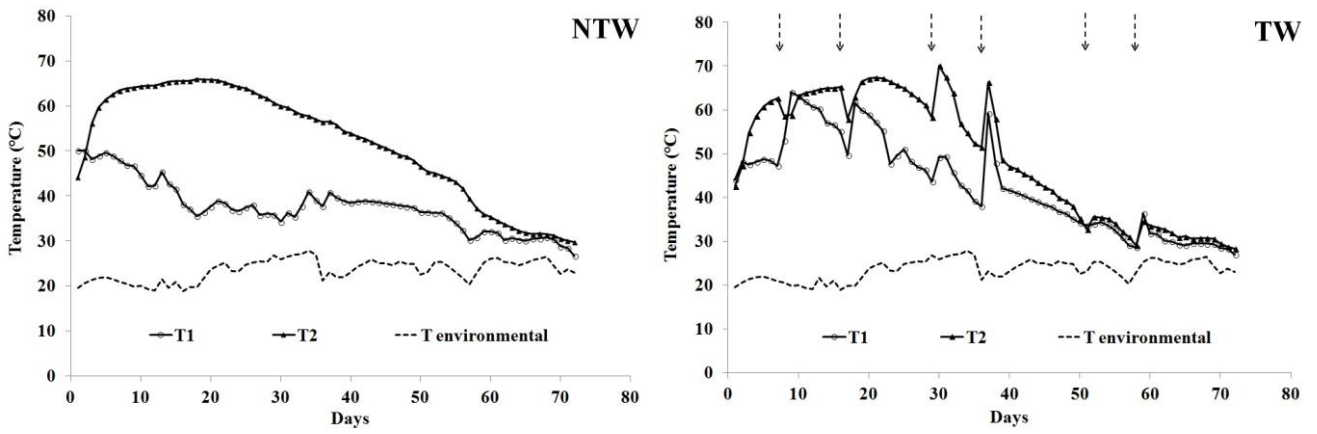

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Figure 2.


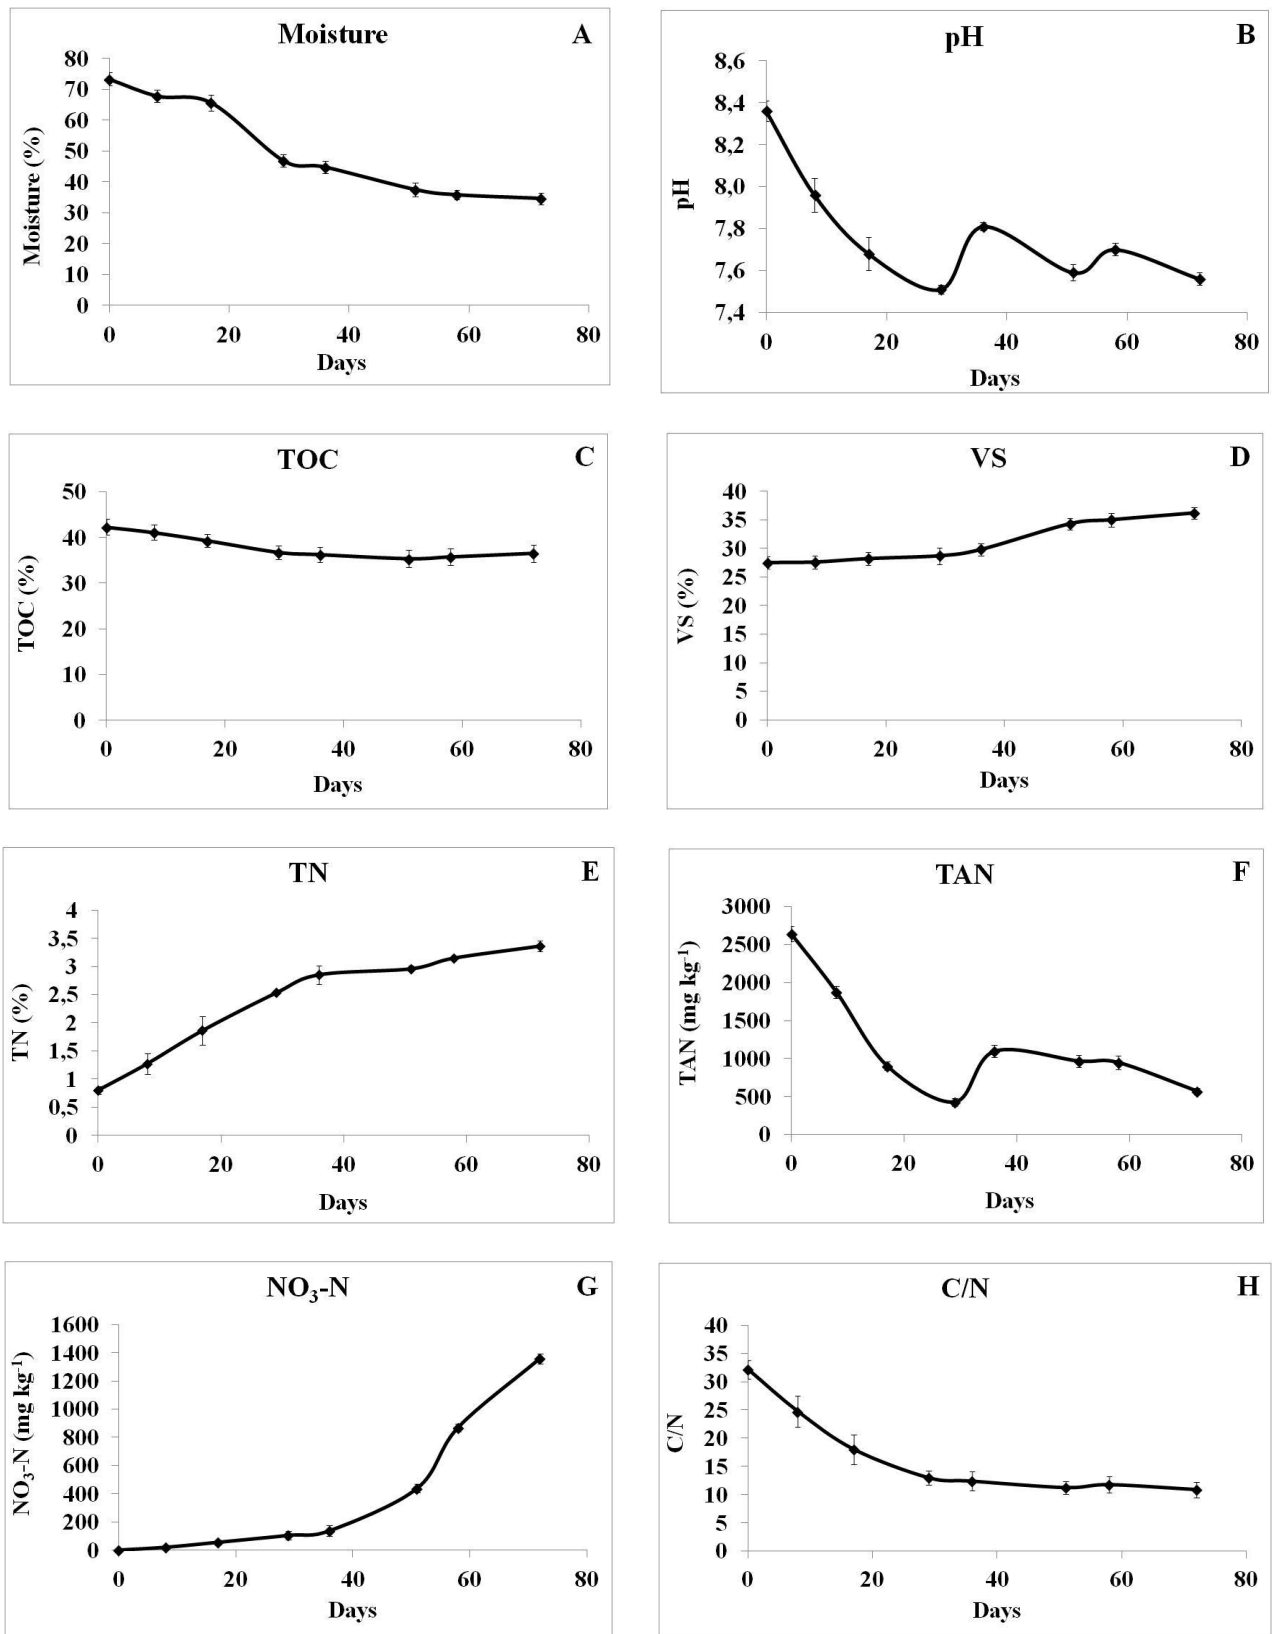


Figure 3.

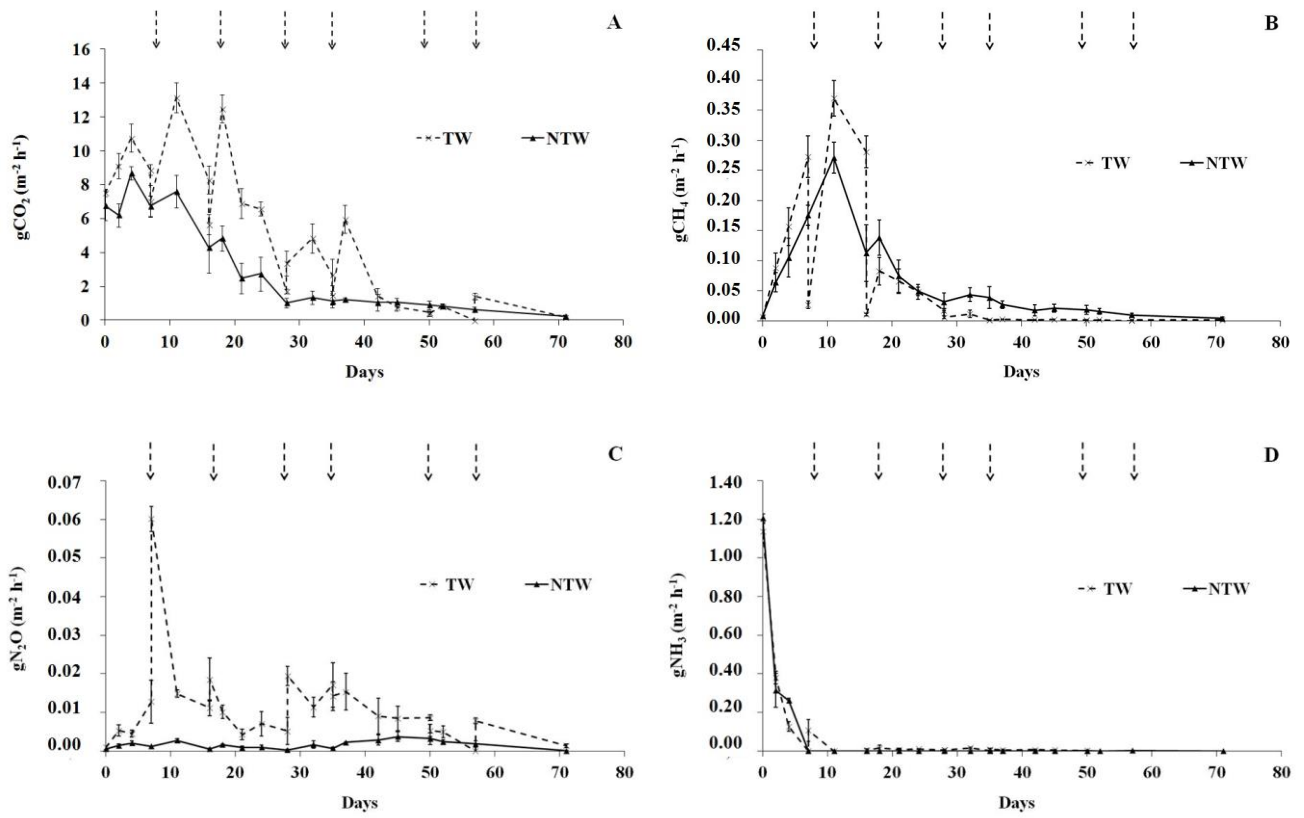

Manuscript ID: APR-D-15-00066

Title: "Composting as a solution to make pig manure suitable for pelletizing: environmental impact of the process."

RESPONSE TO EDITOR AND REFEREES' COMMENTS:

Below are our responses (in **BOLD** type) to the Reviewers' comments

Editorial Notes:

1. List of references should be formatted according to "Guide for Authors".

a) Please provide following reference in English.

a. Colonna and Alfano, 2010.

Response 1: done.

2. Missing reference: The following reference is cited in the text but is missing from the reference list. Please add this missing reference to the list or delete it from the text.

a) AOAC, 1990.

Response 2: done.

Reviewers' comments:

Reviewer #1:

My only reservation was not being used a multivariate statistical technique to analyze the data, such as a correlation matrix and the presentation of data in the form of dendograms classified by Euclidean distances.

Response 1: The goal of this study was to investigate the effect of two composting strategies (turned and not turned) on compost physicochemical characteristics and gaseous emissions during composting. Our intention was not to study how the investigated variables are related to one another. For such a reason we consider the used one-way analysis of variance (ANOVA) as the more appropriate statistical method to compare the differences in results

Use IPCC 2014 data.

Response 2: we did not find IPCC 2014 data. However, following your suggestion, we have recomputed the GWPs of CH₄, N₂O and NH₃ with the new values as contained in the 2013 IPCC Guidelines and revised the manuscript accordingly. Specifically we have:

- replaced the sentence "*Total gaseous losses were expressed in CO₂-eq using conversion factors of 1, 25, 298 and 2.98, respectively for CO₂, CH₄, N₂O and NH₃ (IPPC, 2007)*" from L43 to L45, page 6, of the original manuscript with the following "Total gaseous losses were expressed in CO₂-eq using conversion factors of 1, 28, 265 and 2.65, respectively for CO₂, CH₄, N₂O and NH₃ (IPCC, 2013)".
- revised Table 2

Reviewer #2

The work reported however is not in line with the introduction and the title as it reports the comparison of two composting strategies of the solid fraction obtained after separation of pig manure.

Response 1: Following your suggestion, the title of the paper has been revised to “Evaluation of two composting strategies for making pig slurry solid fraction suitable for pelletizing”.

The results reported not always are easy to understand and in some case the data are not fully reported like the variability of the samples taken in different locations of the windrow.

Response 2: we carefully proofread the text to make the “Results and discussion” section more understandable to the reader. We also reported standard error bars in order to show the variability of data depicted in Figure 2. However, we are not able to report the variability of the samples taken in different locations of the windrow. As stated in the paper (page 5, lines 7-14), “...samples from bottom, surface, sides and centre of each windrow were taken and mixed together to make them representative of the composting windrow (Getahun et al., 2012)”. Therefore at each sampling occasion we analysed one (composite) sample of manure per windrow. To clarify this aspect the sentence “All collected samples were analyzed for..” has been replaced with “All composite samples were analyzed for..”

The methodology used to compare data statistically is not reported and can be just guessed from the results.

Response 3: we have now added to the M&M section a new Subsection (2.4. Statistical analysis) to better explain the adopted statistical analyses methodology and clarified how the data were processed. A reference (SPSS, 2012) was also added to the text.

The 1st or 2nd order fitting of gas concentration is missed in the results.

Response 4: we think that this information should be given in the “M&M” section. We have now revised the sentences “The concentrations of each GHG (CO₂, CH₄ and N₂O) were plotted over time, the data were then fitted to a 1st order (linear) or 2nd order (curve-linear) polynomial,..” as follow:

“The concentrations of each GHG (CO₂, CH₄ and N₂O) were plotted over time, the data were then fitted to a 1st degree equation ($C = ax + b$, where C is the concentration of gases and x is the time in minutes) or 2nd degree polynomial equation ($C = ax^2 + bx + c$) (Hutchinson and Livingston, 1993)”

It is quite strange that figure 2 reports only one of the two conditions tested.

Response 5: As stated in the manuscript (P.5, lines12-14): “During the experimental period, composite samples were...taken ...from each turned windrow in correspondence of the turning operations.” For such a reason Fig. 2 depicts only changes in content of the considered physicochemical parameters (moisture, TOC, VS,) in manure during composting in Turned Windrows. It was part of our experimental design to sample and analyse NTW only at the beginning and at the end of the trial (P.5, lines12-14), in order to not affect the composting process. However, we reported the chemical characteristics of fresh manure and those of final composts obtained with the two turning strategy (NTW, TW) in Table 1.

In any case, an assessment of the environmental impact of the two composting strategies requires, as the authors state at line 12 of page 10, a whole scale approach. The suitability of the compost to be pelletized cannot be state just by the moisture content...

Response 6: we agree. We have now provided more information in the manuscript about the characterization of composted manure. In detail we have:

- replaced the sentence “All collected samples were analyzed for pH, moisture content, volatile solids (VS), total organic carbon (TOC), total nitrogen (TN) and total ammoniacal nitrogen (TAN).” from L43 to L45, page 6, of the original manuscript with the following “All collected samples were analyzed for pH, moisture content, volatile solids (VS), total organic carbon (TOC), total extractable carbon (TEC), total nitrogen (TN), total ammoniacal nitrogen (TAN), nitrate nitrogen (NO₃-N), C/N ratio and Humification Ratio (HR)”.
- added to the text in the Abstract section of the revised version of the manuscript: Total extractable carbon was determined according to the methodology reported by Romero et al. (2007). ... and nitrate nitrogen was determined by ion chromatography (Dionex-4000i, Dionex, USA). Humification Ratio was calculated according to the following equation (Roletto et al., 1985):
$$\text{HR (\%)} = (\text{TEC} / \text{TOC}) \times 100$$
- added a new Subsection “Stability and quality of the final products” to the Results and Discussion section

.....and the environmental impact need more comprehensive approach. For example the energy used to turn the windrow should be considered.

Response 7: we agree. However energy consumption was beyond the scope of this study. In the M&M section, we now clearly state that:

“The objective of the study was to investigate the effects of two different composting strategies (turned and not turned) on i) manure physicochemical characteristics and ii) NH₃ and GHG (CO₂, CH₄ and N₂O) emissions.”

In addition we have replaced the sentence “However a comprehensive assessment requires a whole-system approach which considers not only composting but also emissions after soil application. Experiments under laboratory-scale conditions will be conducted on the application of pelletized composted manure.” with the following:

“However a comprehensive assessment of the process requires a whole-system approach which considers not only emissions during composting but also emissions after soil application of pelletized composted manure, as well as the environmental impact of energy consumption. All these aspects are under study by our research group.

Moreover, there is a serious concern on the evaluation of the composting process carried out. The authors do not report any evaluation of the process and the stability of the final product has not been tested. Therefore it is not clear if the microbial activity has been limited by the low humidity or effectively because the active phase was completed. The curing phase has not been considered, anyway.

Response 8: these aspects are now discussed in the Subsection “Stability and quality of the final products”

Finally, I have serious doubt that the composting process can be really carried out with a solid fraction at low dry matter content (26.60%) without the addition of bulking agents.

Response 9: data reported in Table 1 suggest that at the end of the trial the TW reached a good degree of stability and maturity. In particular, the C/N ratio resulted in the range 10-15 (Gomez-Brandon et al., 2008) and the HR value was higher than 7 (Bernal et al., 2009). In addition at the end of the composting process the content of NO₃-N resulted higher than that of TAN, indicating that the process has been

performed under adequate aeration conditions (Bernal et al., 1998). All these aspects are now stated in the manuscript.

Reviewer #3

The objective of the paper is composting for pelletizing, but only the composting process is described. If the objective is pelletizing, the reason for composting has not been clearly stated, as drying may be sufficient for the physical stabilization. The objective should be re-written in order to match the actual content of the paper.

Response 1: in the Introduction section (lines 34-41, page 3) of the original manuscript we have specified that: A key part of this technology is the composting of fresh SF, in order to stabilize manure (e.g., converting readily available N to more stable organic N) and remove odours and pathogens. The heat generated by composting also allows the drying needed to make manure suitable for pelletizing. In this work we didn't studied the pelletization process which was investigated in another study (Pampuro et al., 2013; cited in the text).

In general, the paper should improve the discussion section, finding scientific explanations for the results based on the biological process that occur during composting, taking into account the different composting system used in the two piles.

Response 2: we revised the discussion section according to your suggestion

Information on gaseous emissions during composting of animal manure should be included.

Response 3: we have reported information on gaseous emissions during composting of animal manure in the Introduction section (from P.3, line 51 to P.4, line 10).

The number of gas samples should be clearly indicated. How many samples were taken? How many times per week and how long for?

Response 4: to clarify these aspects we have:

- replaced the sentence reported in the original paper at page 5, lines 41-45, with:
“CO₂, CH₄, N₂O and NH₃ emissions from NTW were measured three times a week for the first 3 weeks and then twice a week for the following 7 weeks, for a total of 23 times during the 72-day experimental period. For TW CO₂, CH₄, N₂O and NH₃ emissions were measured according to the same schedule as for NTW. However, in correspondence of each turning operation, gases emissions rates from TW were evaluated before turning and immediately after turning. Therefore, for the latter manure composting strategy, a total of 29 measurement sessions per each investigated gas were completed.”
- added the following sentence to M&M section: According to the experimental design as explained above, a total of 468 gas samples were collected, 261 of which from TW, and 207 from NTW.

Include here the methodology for calculating total gas emissions for TW and NTW. In TW a very important part of the gases will be emitted during turning operations. Then, the procedure for their estimation must be included.

Response 5: we have now explained how cumulative emissions were estimated in M&M section. The following sentence has been added: “Cumulative emissions from each manure windrow over the composting period were estimated, by averaging net flux rates between two sampling points and multiplying by the time interval between sampling points.”

This section needs updated references on manure composting. There is a description of the results during composting, but they require scientific explanation based on references.

Response 6: we agree. Some references on manure composting have been added.

P.7, lines 24-27. The T1 and T2 in Figure 1 cannot be identified. Use different lines and symbols.

Response 7: Figure 1 has been modified according to your suggestion.

The conjunction of high temperature and pile turning was responsible for water evaporation (not only the temperature) as demonstrated by the most effective drying in TW. This needs to be stated in P.7, lines 29-41.

Response 8: we agree. The following sentence has been added to the text: "This difference is probably do to the turning operations which have a positive effect on compost aeration and hence on temperature increase."

Also, the concentration effect of TN can occur during composting due to the mass loss of the pile caused by the organic matter degradation. Then, a mass balance should explain TN losses and conservation in the compost according to the system used. These should be clearly stated in P.7, lines 39-53.

Response 9: we agree. As suggested a mass balance has been conducted to determine the overall effect of composting on manure properties and N-losses. These aspects are now discussed in the Section "3.3. Mass Balance."

In P.7, line 51, the authors said that "the concentration of TOC and TN resulted significantly higher in TW than in NTW" but according to the results shown in Table 1, the values were greater for NTW than for TW.

Response 10: the sentence has been rephrased

P.7, lines 53-56. The limited aeration, which may have led to anaerobic conditions inside the pile, may have limited the biological activity of the aerobic microorganisms responsible for the degradation of the organic matter in NTW. Then, the microbial stability of the compost should be tested or at least some maturation indices presented.

Response 11: we agree. According to your suggestion we have now provided information concerning the content of nitrate nitrogen (NO₃-N), C/N ratio and Humification Ratio (HR) of composted manure. Subsection "Stability and quality of the final products" has been added.

Gas samples were taken before and after each turning in TW, but I cannot see these results. The lines and symbols for TW and NTW in figure 3 must CLEARLY identify each pile (they are too similar).

Response 12: Figure 3 has been modified according to your suggestion

The CO₂ emissions reflect the degradation of the organic matter during composting, so lower values in NTW than in TW are in concordance with previous findings (VS, TOC, etc.). Please, discuss properly.

Response 13: to clarify this aspect, the following sentence has been added to the text (3.3. Mass Balance): "These results are in line with the higher carbon emissions as CO₂ observed from TW than from NTW".

P.8, lines 58-58. The sentence "...CH₄ emission in TW decreased earlier than in NTW...", I cannot see that in figure 3.

Response 14: the sentence has been deleted

Authors should explain how the total gaseous emissions for TW were calculated, as most emissions probably occurred during turning, when measurements cannot be done.

Response 15: please see Response..

Also the authors should take into account the reduction in dry weight of the pile due to the microbial degradation of the organic matter for their calculation, which may be based on mass balance.

Response 16: please see Response 5.

There is no discussion of pelletizing, although it was the objective of the paper. The authors should re-consider their objectives and title of the paper.

Response 17: as above mentioned (please see Response 1), in this work we didn't studied the pelletization process. However the title "Composting as a solution to make pig manure suitable for pelletizing: environmental impact of the process" has been replaced with "Evaluation of two composting strategies for making pig slurry solid fraction suitable for pelletizing" according to Reviewer #2

Any conclusion related to pelletizing should be removed as that has not been discussed or studied

Response 18: in the Conclusion section no sentences related to pelletizing process have been reported

References: AOAC (1990) is missing from the reference list. References for manure composting need to be updated.

Response 19: Reference "AOAC,1990" has been now added in the reference list.

The quality of all figures should be improved.

The styles of the lines and symbols for the different piles in Figs 1 and 3 are too similar for identifying the different systems.

Use dots for decimal points.

In Figure 3, the title of the Y axis should follow the style of the other figures, e.g. CO₂ (g m⁻³ h⁻¹).

Insert error bars in data of Figure 2.

Response 20: done

Reduce decimals for most standard errors.

Response 21: done

Editorial Office of Atmospheric Pollution Research

Title: EVALUATION OF TWO COMPOSTING STRATEGIES FOR MAKING PIG SLURRY SOLID FRACTION SUITABLE FOR PELLETIZING

20 July 2015

Dear Editors,

Please, find enclosed electronic version of the manuscript entitled “Evaluation of two composting strategies for making pig slurry solid fraction suitable for pelletizing” by PAMPURO Niccolò, DINUCCIO Elio, BALSARI Paolo and CAVALLO Eugenio, to be considered for publication in *Atmospheric Pollution Research*.

By signing this covering letter, I accept the conditions laid down in the Directions to Contributors:

- the submission represents original work that has not been published previously,
- it is not currently being considered by another journal,
- if accepted for the *Atmospheric Pollution Research* it will not be published elsewhere in the same form, in English or in any other language,
- each author has seen and approved the contents of the submitted manuscript.

As suggested in “Guide for Authors” I report the significance of results.

Composting of pig slurry solid fraction for pellet production is nowadays getting a popular manure management practice in most European countries. However, to our knowledge no data on the environmental impact of this process is available. This study was carried out to narrow the gap in knowledge by assessing, in a pilot scale experiment, NH₃ and GHG (CO₂, CH₄ and N₂O) emissions during composting of pig solid manure in windrows. Two composting strategies, turned and not turned, were investigated.

Results from this study provide useful information to be incorporated into decision tools to meet the needs of policy makers, advisors and farmers. In addition, data obtained in this study can be used for the compilation of national inventories of NH₃ and GHG emissions from the livestock sector.

If you need anything else, please do not hesitate to contact me.

Looking forward to hearing from you.

Yours faithfully,

Niccolò Pampuro.