

AperTO - Archivio Istituzionale Open Access dell'Università di Torino

## Effect of cellulose as co-substrate on old landfill leachate treatment using white-rot fungi

### **This is the author's manuscript**

*Original Citation:*

*Availability:*

This version is available <http://hdl.handle.net/2318/1643428> since 2017-06-28T10:25:18Z

*Terms of use:*

Open Access

Anyone can freely access the full text of works made available as "Open Access". Works made available under a Creative Commons license can be used according to the terms and conditions of said license. Use of all other works requires consent of the right holder (author or publisher) if not exempted from copyright protection by the applicable law.

(Article begins on next page)

This Accepted Author Manuscript (AAM) is copyrighted and published by Elsevier. It is posted here by agreement between Elsevier and the University of Turin. Changes resulting from the publishing process - such as editing, corrections, structural formatting, and other quality control mechanisms - may not be reflected in this version of the text. The definitive version of the text was subsequently published in *BIORESOURCE TECHNOLOGY*, 241, 2017, .

You may download, copy and otherwise use the AAM for non-commercial purposes provided that your license is limited by the following restrictions:

- (1) You may use this AAM for non-commercial purposes only under the terms of the CC-BY-NC-ND license.
- (2) The integrity of the work and identification of the author, copyright owner, and publisher must be preserved in any copy.
- (3) You must attribute this AAM in the following format: Creative Commons BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/deed.en>),

When citing, please refer to the published version.

Link to this full text:

<http://hdl.handle.net/2318/1643428>

1           **EFFECT OF CELLULOSE AS CO-SUBSTRATE ON OLD LANDFILL LEACHATE**  
2                           **TREATMENT USING WHITE-ROT FUNGI**

3  
4           A. Bardi <sup>a</sup>, Q. Yuan <sup>b</sup>, G. Siracusa <sup>a</sup>, I. Chicca <sup>a</sup>, M. Islam <sup>b</sup>, F. Spennati <sup>c</sup>, V. Tigini <sup>d</sup>, S. Di  
5                           Gregorio <sup>a</sup>, D.B. Levin <sup>e</sup>, G. Petroni<sup>a</sup>, G. Munz <sup>c</sup>  
6

<sup>a</sup> Department of Biology, University of Pisa, Via Luca Ghini 13, 56126, Pisa, Italy;

<sup>b</sup> Department of Civil Engineering, University of Manitoba, 15 Gillson Street, R3T 5V6, Winnipeg,  
Canada;

7 <sup>c</sup> Department of Civil and Environmental Engineering, University of Florence, Via S. Marta 3, 50139,  
8 Florence, Italy;

9 <sup>d</sup> Department of Life Sciences and Systems Biology, University of Turin, viale Mattioli 25, 10125,  
10 Torino, Italy;

11 <sup>e</sup> Department of Biosystems Engineering, University of Manitoba, 75A Chancellor Circle, R3T 5V6,  
12 Winnipeg, Canada.

13  
14  
15  
16  
17  
18  
19  
20  
21  
  
\*Corresponding author. Tel: [+39 050 2211356](tel:+390502211356). E-mail address: [alessandra.bardi@for.unipi.it](mailto:alessandra.bardi@for.unipi.it)  
([A.Bardi](mailto:A.Bardi)).

22 **Abstract**

23 Conventional wastewater treatment technologies are ineffective for remediation of old LandFill  
24 Leachate (LFL), and innovative approaches to achieve satisfactory removal of this recalcitrant fraction  
25 are needed. This study focused on old LFL treatment with a selected fungal strain, *Bjerkandera adusta*  
26 MUT 2295, through batch and continuous tests, using packed-bed bioreactors under non-sterile  
27 conditions. To optimize the process performance, diverse types of co-substrates were used, including  
28 milled cellulose from beverage cups waste material. Extracellular enzyme production was assayed, in  
29 batch tests, as a function of a) cellulose concentration, b) leachate initial Chemical Oxygen Demand  
30 (COD) and Soluble COD (sCOD), and c) co-substrate type. Bioreactors were dosed with an initial  
31 start-up of glucose (Rg) or cellulose (Rc). An additional glucose dosage was provided in both reactors,  
32 leading to significant performance increases. The highest COD and sCOD removals were i) 63% and  
33 53% in Rg and ii) 54 % and 51% in Rc.

34

35 **Keywords:** Bioreactors; Landfill leachate; Recalcitrant compound removal; Wastewater treatment;  
36 White-rot fungi.

37

38

39

40

41

42

43

44

45

46

47

## 48 **1.0 Introduction**

49 Landfill Leachate (LFL) is defined as the liquid produced by rainwater percolation in landfill waste  
50 layers. Since sanitary landfilling is one of the most common methods for disposing Municipal Solid  
51 Waste (MSW) (Nghiem *et al.*, 2016), the generation of LFL cannot be prevented (Ghosh *et al.*, 2014a).  
52 LFL contains recalcitrant organic compounds that standard biological processes are unable to  
53 efficiently degrade (Verdrenne *et al.*, 2012; Zhao *et al.*, 2013a; Tigini *et al.*, 2014). Therefore, the  
54 search for innovative and sustainable technologies to reduce the impact of untreated leachate is a  
55 serious environmental concern (Jones *et al.*, 2006; Ghosh *et al.*, 2014b). Although the composition of  
56 LFL varies widely, depending on diverse factors including age and degree of stabilization of waste,  
57 several common features can be observed (Umar *et al.*, 2010; Razarinah *et al.*, 2015), such as the  
58 presence of high ammonia concentrations, high organic loads, and the presence of inorganic  
59 compounds, including heavy metals and salts (Kamaruddin *et al.*, 2014).

60 With landfill aging, the ratio between Biological and Chemical Oxygen Demand (BOD<sub>5</sub>/COD)  
61 decreases due to the hydrolysis of the biodegradable organic fraction of LFL, while the non-  
62 biodegradable fraction of COD remains unchanged. In particular, three stages of LFL have been  
63 classified according to landfill age (Peyravi *et al.*, 2016). Young leachate (< 5 years) presents higher  
64 concentrations of biodegradable organic loading, with a BOD<sub>5</sub>/COD ratio > 0.3 composed mainly  
65 (about 70%) of Volatile Fatty Acids (VFA). Intermediate leachate, from 5 to 10 years, presents a  
66 BOD<sub>5</sub>/COD ratio between 0.3, and 0.1 and its composition includes 5 to 30% VFAs, as well as humic  
67 and fulvic acids (Renou *et al.*, 2008). In contrast to young LFL, old leachate (> 10 years) presents a low  
68 BOD<sub>5</sub>/COD ratio (< 0.1) and high concentrations of refractory humic and fulvic acids as a consequence  
69 of microbial activity (Batarseh *et al.*, 2010; Kalčíková *et al.*, 2014; Ghosh and Thakur, 2016).  
70 However, the cut off between intermediate and old leachate is not strictly defined (Peyravi *et al.*, 2016),

71 and often the same treatments are applied to both intermediate and old LFL (Bohdziewicz and  
72 Kwarciak, 2008).

73 Although biological treatments can effectively remove non-stabilized organic matter and toxic  
74 compounds in young LFL, the efficiency decreases with the age of the leachate and, generally, further  
75 physical-chemical treatment are required before discharging old LFL in receiving waters. Therefore,  
76 the achievement of sustainable technologies for old LFL treatment is still a challenge (Peyravi *et al.*,  
77 2016).

78 The movement of LFL into the surrounding soil, ground water, or surface water, may lead to severe  
79 pollution (Razarinah *et al.*, 2015; Kumari *et al.*, 2016) and thus regulations concerning LFL discharge  
80 into receiving waters are becoming more and more stringent (Renou *et al.*, 2008; Peyravi *et al.*, 2016).  
81 Indeed, the traditional hauling of LFL to wastewater treatment facilities can interfere with UV  
82 disinfection (Zhao *et al.*, 2013b) and LFL composition can inhibit the biological treatment resulting in  
83 increased concentrations of effluents (Neczaj and Kacprzak, 2007).

84 For all these reasons, LFL has been regarded with particular interest as a highly polluted wastewater  
85 whose treatment is generally complex and expensive (Kamaruddin *et al.*, 2014). The increasing  
86 attention on LFL treatment is clearly visible in the growing number of articles related to this topic.  
87 Over 110 articles concerning LFL treatment were published in the scientific literature between 1970  
88 and the end of 20<sup>th</sup> century, and more than 600 have been published since the beginning of the 21<sup>st</sup>  
89 century (source ISI Web of Science).

90 Innovative biological treatments, such as the use of white-rot fungi, have been widely investigated,  
91 resulting effective remediation of several problematic wastewaters (Lopez *et al.*, 2002), including  
92 pharmaceutical wastewater (Marco-Urrea *et al.*, 2009), olive mill wastewater (Kissi *et al.*, 2001),  
93 bleaching wastewater from pulp paper industries (Fang and Huang, 2002), textile wastewater  
94 (Rodriguez-Couto, 2013), and petrochemical wastewater (Palli *et al.*, 2016). Effective remediation of

95 soils contaminated with polycyclic aromatic hydrocarbons has also been achieved using white-rot fungi  
96 (Di Gregorio *et al.*, 2014).

97 The use of white-rot fungi has been recently applied in combination with more common approaches,  
98 including other biological treatment methods (Gullotto *et al.*, 2014), as well as physical and chemical  
99 methods (Castellana and Loffredo, 2014; Loffredo *et al.*, 2016). Recalcitrants of LFL have been in part  
100 identified as natural macromolecules including lignins, tannins, humic materials, folic acids,  
101 carbohydrates (Gourdoun *et al.*, 1989) and, partially, as organic pollutants such as preservatives used in  
102 personal care products (PCPs), such as methylparaben (MP), ethylparaben (EP), propylparaben (PP),  
103 and butylparaben (BP), hormones, pharmaceuticals, halogenated hydrocarbons, and pesticides (Peyravi  
104 *et al.*, 2016). When considering the refractory fraction of LFL, the use of white-rot fungi, with their  
105 ligninolytic systems, could play an important role in its treatment (Ellouze *et al.*, 2008). Effective  
106 fungal treatments are often associated with the production of extracellular ligninolytic enzymes, such as  
107 manganese-dependent peroxidases (MnP), lignin-peroxidases (LiP), and laccases (LaC) (Wesenberg *et*  
108 *al.*, 2003; Ellouze *et al.*, 2008), all of which are expressed by white-rot fungi (Razarinah *et al.*, 2015).

109 Studies of fungal treatment of LFL in the scientific literature have focused, mainly, on remediation  
110 of young LFL. For example, a COD reduction of up to 90% with 50% diluted leachate has been  
111 associated with laccase activity up to 4000 U/L (Ellouze *et al.*, 2008, 2009). In contrast, inhibition of  
112 fungal enzymatic activity has been reported using 90% old LFL (Kalčíková *et al.*, 2014), although  
113 normal enzymatic activity was restored when the concentration of old LFL was reduced. Tigini *et al.*  
114 (2013) reported the association of decolourisation with ligninolytic enzymatic activity, through batch  
115 experiments on LFL using autochthonous and allochthonous fungal strains. The authors also quantified  
116 the fungal load and ecotoxicological features of LFL (Tigini *et al.*, 2014).

117 Although promising, the majority of the results achieved with fungal treatment on LFL have been  
118 attained in batch experiments. Only a limited number of experiments have been carried out in

119 continuous bioreactors (Ghosh *et al.*, 2014a; Saetang and Babel, 2009), and no full-scale applications  
120 have been reported.

121 In this paper the treatment efficiency of a selected white-rot fungus, *Bjerkandera adusta* MUT 2295,  
122 on old LFL (from a landfill site in Winnipeg, Canada) has been investigated, under non-sterile  
123 conditions, through batch and continuous experiments. In particular, batch tests were performed to  
124 evaluate the enzymatic activity of the fungus using glucose, malt extract or milled cellulose as co-  
125 substrate under different experimental conditions including a) different cellulose concentrations and b)  
126 leachate dilutions. Continuous experiments were carried out using bench-scale packed-bed trickling  
127 bioreactors in which *Bjerkandera adusta* was inoculated as immobilized on polyurethane foam carriers.

## 128 **2.0 Material and Methods**

### 129 2.1 Chemicals, fungal strain, and substrates

130 All chemicals used in this study were of analytical grade and purchased from VWR Canada. The  
131 fungal strain used in this study, *Bjerkandera adusta* MUT 2295, was obtained from *Mycotheca*  
132 *Universitatis Taurinensis* (MUT). The strain, previously used to treat textile, tannery and  
133 pharmaceutical wastewaters (Anastasi *et al.*, 2010; Spina *et al.*, 2012), was selected during previous  
134 experiments (Bardi *et al.*, 2016) on account of its capability of decolourizing a sample of leachate  
135 (Italy) up to 40%. The color removal was associated with MnP production up to 40 U/L.

136 The strain was preserved on Malt Agar plates (MEA, glucose 20 g/L, malt extract 20 g/L, yeast  
137 extract 20 g/L and peptone 2 g/L) at + 4°C and periodically inoculated in new Petri dishes to preserve  
138 the colony. The fungal strain was immobilized on polyurethane foam cubes of 2 cm<sup>3</sup>. After the pre-  
139 cultivation on MEA, *B. adusta* was homogenized under sterile conditions in 9.0 g/L NaCl, and  
140 inoculated into 1L flasks containing glucose and yeast extract liquid medium (GLY = 5.0 g/L glucose;  
141 1.9 g/L yeast extract) and 2 cm<sup>3</sup> polyurethane foam (PUF) cubes. For each cube, 1.5 mL of homogenate  
142 was added. Flasks were incubated in agitation for one week. After 7 days, the immobilization of the  
143 fungus was complete and the cubes were used for batch and continuous experiments.



144 Old LFL was collected from Brady Road Municipal facility, Winnipeg, Canada and stored at + 4 °C.  
145 Sampling was performed in the same well during all the experiments described in this study. LFL  
146 chemical characterization was carried out before the beginning of each test (Table 1). The cellulose  
147 used in this study is actually a waste material obtained from paper beverage cups (Tim Hortons,  
148 Canada Beverage-Cup, BCC) after milling, and the cellulose content was estimated to be 86% (Agbor  
149 *et al.*, 2011).

## 150 2.2 Calibration curve of cellulose solubilisation

151 As a preliminary step for the set-up of cellulose containing bioreactor (Rc), a solubilisation curve of  
152 cellulose was plotted for COD measurement using ordinary least squares linear regressions. COD was  
153 measured according to Standard Methods for Examination of Water and Wastewater (SMEW, 20<sup>th</sup>  
154 Edition), using dichromate method and HACH spectrophotometer DR2800. Soluble COD, sCOD was  
155 measured after samples filtration, using Whatman filter papers grade 1. The cellulose concentrations  
156 used to plot the curve were: 0.5, 1.0, 2.5 and 5.0 g/L. For each cellulose concentration, a stock solution  
157 of 50 mL of BCC cellulose was prepared in deionized water and poured into Polypropylene Centrifuge  
158 Tubes (50 mL volume). After standing overnight, the tubes were centrifuged for three cycles of 15  
159 minutes at 14000 g. COD was measured in the stock solutions.

160 In order to ensure sample homogeneity, COD measurements were performed using the entire  
161 cellulose stock volume, and the average COD value for each concentration was plotted in the  
162 calibration curve. For each stock solution, at least 20 COD measurements were carried out.

## 163 2.3 Batch experiments: Cellulose at diverse concentrations

164 MnP production and COD removal were investigated using either a “complex sugar”, milled  
165 cellulose, at diverse concentrations, or later on, a simple sugar, glucose and malt extract, as the co-  
166 substrates. In the batch tests with milled cellulose as co-substrate, immobilized biomass was used. The  
167 milled cellulose was prepared as described in Section 2.1 above. MnP activity was determined

168 spectrophotometrically (Biotek Powerwave Xs Microplate Spectrophotometer) by measuring at 590 nm  
169 dimethylaminobenzoic acid/3-methyl-2-benzothiazoline hydrazone hydrochloride (DMAB/MBTH), in  
170 0.1 M succinate lactate buffer, pH 4.5, at 25 °C (Vyas *et al.*, 1994).

171 Each flask contained 7 PUF cubes, embedded with *B. adusta*, and 160 mL of LFL. Cellulose,  
172 previously sterilized by autoclaving it at 121 °C, 20 psi, was added in the 4 trials, using 0.5, 1.0, 2.5,  
173 and 5.0 g/L concentrations. The trials were incubated at 25 °C for 10 days with shaking (150 rpm).  
174 Unseeded controls, without fungal inoculum, containing 0.5, 1.0, 2.5, and 5.0 g/L of cellulose were  
175 performed and kept in the same experimental conditions. In all the flasks, pH was adjusted to 4.5, using  
176 H<sub>2</sub>SO<sub>4</sub> (10%), before starting the experiment.

177 COD removal was measured and the estimation of cellulose solubilisation was carried out as the  
178 difference between COD values in the flasks during the treatment and COD value of 100% raw LFL,  
179 assuming that the increase in COD was mainly due to cellulose solubilisation. An estimation of  
180 solubilized cellulose in mg/L was based on the theoretical values of the calibration curve.

181 Color removal during the treatment was also evaluated spectrophotometrically. The decolorization  
182 percentage (DP) during the treatment was determined spectrophotometrically as the decrease of the  
183 spectrum area in the visible range (380-760 nm) with respect to the initial values (T<sub>0</sub>).

184 2.4 Batch tests: The effect of leachate organic load on MnP activity, COD, and sCOD removal

185 The effect of leachate organic load on MnP activity, COD and sCOD removal, using 2.5 g/L of  
186 cellulose, was evaluated. The test was performed using i) undiluted LFL and ii) 50% LFL. Fungal  
187 biomass was prepared by growing 10 plugs of about 1-2 mm in GLY liquid media for one week. At the  
188 end of the growth, the GLY was replaced with leachate (160 mL) and 2.5 g/L of cellulose were added.  
189 Cellulose sterilization, pH adjustment, controls preparation and incubation conditions followed the  
190 same protocol described previously in section 2.3. MnP was measured as described in Section 2.3.  
191 COD and sCOD were measured as described above Section 2.2.

## 192 2.5 Batch tests: Comparison with different co-substrates

193 MnP production by *B. adusta*, immobilized in PUF, was also evaluated using malt extract (1.0 g/L)  
194 and glucose (1.0 g/L). The two co-substrates were added separately, and three independently replicated  
195 experiments (i.e. three separate flasks) were performed for each condition. The same number of  
196 unseeded controls, without fungal inoculum, was carried out. Fungal growth, immobilization and  
197 incubation were performed as described above Section 2.1. MnP was measured as described in Section  
198 2.3. COD and sCOD were measured as described above Section 2.2.

## 199 2.6 Experiments with continuously fed packed-bed bioreactors: Reactor design and operation

200 In this study, two packed bed bench-scale reactors were used (Figure 1) with a total volume of 5.0 L  
201 and a working one of 4.5 L. The reactors were equipped with pH probes and controllers, which were  
202 set at pH 6.0. The pH was maintained using 10% sulfuric acid. On the reactor's bottom, a diffuser,  
203 connected with an air pump, provided air continuously with a flow of 2.0 L/min. A polyethylene cage  
204 containing PUF cubes colonized by *B. adusta* MUT 2295 was fixed to a rotating shaft (about 5.0 rpm/  
205 minute). Sixty (60) immobilized cubes were added in each reactor. The reactors were connected to two  
206 tanks and two pumps (ISMATEC Reglo ICC, Digital Peristaltic Pump) for inlet and outlet. The  
207 hydraulic retention time (HRT) was 72 hours (hrs), with a pump flow of 6.9 mL /min for influent and  
208 effluent. A cycle of 6 hrs was employed. In every cycle reactors were fed with 416 mL of influent  
209 during one hour; the same amount was discharged during the outlet that lasted also 1 hour. A lag time  
210 of 4 hours occurred between the end of the discharge and the beginning of the following feeding.  
211 Reactors were kept in a controlled temperature room (20 – 25 °C). Two different co-substrates were  
212 used. Cellulose (0.5 g/L) was added in one reactor (Rc), inside the cage, as co-substrate at the start-up  
213 of the reactor. LFL from Brady Road Landfill site was diluted at 33% using deionized water. Glucose,  
214 0.5 g/L was added in the other reactor (Rg) by adding it directly inside the reactor, and LFL was diluted

215 50%. An additional co-substrate (glucose 0.5 g/L) was put directly in both the reactors after 75 days  
216 and 53 days for Rg and Rc, respectively.

## 217 2.7 Experiments with continuously fed packed-bed bioreactors: Reactor monitoring

218 Grab samples were collected from the outlet tank daily and from the inlet tank in correspondence of  
219 feed preparation that occurred weekly. COD and sCOD were estimated as parameters of treatment  
220 efficiency. Ammonium nitrogen, nitrates and nitrites concentrations were measured in influent and  
221 effluent. COD was measured according to Standard Methods for Examination of Water and  
222 Wastewater (SMEW, 20<sup>th</sup> Edition), as described in Section 2.3. Removal Efficiency (RE) for COD and  
223 sCOD was calculated as the percentage removed at a specific timing compared to the initial value at  
224 T<sub>0</sub>. Particulate COD, pCOD, was calculated as the difference between COD and sCOD. The Biological  
225 Oxygen Demand (BOD<sub>5</sub>, 5 days) was measured according to SMEW. Ammonium nitrogen (NH<sub>4</sub><sup>+</sup>-N),  
226 nitrites (NO<sub>2</sub><sup>-</sup>-N) and nitrates (NO<sub>3</sub><sup>-</sup>-N) were measured via a flow injection analyzer (Quick Chem  
227 8500, LACHAT Instruments). Samples for ammonium nitrogen, nitrites and nitrates were previously  
228 filtered using Whatman filter papers grade 1.

## 229 **3.0 Results and discussion**

### 230 3.1 Batch experiments

231 Due to cellulose insolubility and consequent difficulties in measuring cellulose COD, a calibration  
232 curve was plotted to calculate the concentration of cellulose solubilized during fungal treatment. COD  
233 were measured in four stock solutions containing 0.5, 1.0, 2.5, and 5.0 g/L of cellulose, in 50 mL. COD  
234 values increased linearly with cellulose concentration with  $R^2 = 0.9859$ , a slope of 1.059 and standard  
235 deviations between 5 and 1246.

236 In *B. adusta* cultures with LFL and cellulose as co-substrate, MnP production was evaluated as a  
237 function of cellulose concentration. The LFL used in this study was previously analysed (Table 1) and

238 showed the typical characteristics of old LFLs, with high refractory carbon load and high ammonium  
239 nitrogen concentration.

240 The results of MnP activity and COD trends using different concentrations of cellulose are shown in  
241 Figure 2A and Figure 2B, respectively. The enzymatic activity increased slightly during the first 48 hrs  
242 of incubation in all trials, except in the trial with 1.0 g/L cellulose, in which MnP activity showed lower  
243 enzymatic activity. However, greater MnP activity was detected in presence of 1.0 g/L at 96 hrs and  
244 this was positively correlated with a decrease in COD (Figure 2B), which can be explained as partial  
245 consumption of the BCC solubilized in LFL.

246 The greatest MnP activity was detected in the presence of 2.5 g/L of cellulose. MnP ranged from 9.6  
247 U/L at 48 hr to approximately 26.0 U/L from 96 to 240 hrs (Figure 2A). The increase in the enzymatic  
248 activity in 2.5 g/L trial was associated with a decrease in COD value, which can presumably be related  
249 to a partial consumption of previously solubilised cellulose. Correlation of higher enzymatic activity  
250 with co-substrate consumption was also reported by Saetang and Babel (2010). These authors  
251 described, generally, that with fungi, co-substrate consumption is followed by the production of  
252 secondary metabolites and extracellular enzymes for biodegradation.

253 The results observed in the trials with 1.0 and 2.5 g/L of cellulose suggest that the release of  
254 cellulose due to solubilisation and its consequent consumption could enhance the production of MnP in  
255 *B. adusta*. Since COD increases in the trials with 0.5 and 1.0 g/L of cellulose were higher than the  
256 corresponding theoretical COD values of 0.5 and 1.0 g/L of cellulose (568 and 1052 mg/L), we can  
257 expect that a total solubilisation of the added cellulose occurred in these flasks. In addition, in both  
258 trials, COD reductions were higher than theoretical COD values of 0.5 and 1.0 g/L of cellulose,  
259 suggesting that solubilized cellulose was consumed during the treatment.

260 In contrast, in the trials with 2.5 and 5.0 g/L of cellulose, the increase in COD, detected during the  
261 treatment, represented around 57% and 68% of the corresponding theoretical COD values of 3217 and

262 5385 mg/L of cellulose, indicating that an incomplete solubilisation occurred and residual particulate  
263 cellulose was present in the trials.

264 Considering the COD reductions in 2.5 and 5.0 g/L, it is evident that not all the cellulose available  
265 was consumed, since the reductions during the whole period covered around 76% and 88%, of the  
266 COD increase values observed in the two trials (1831 and 3657 mg/L, respectively). From Figure 2B, it  
267 is possible to compare COD trend in the trials inoculated with *B. adusta* with the unseeded controls.  
268 The estimation of COD increases and consequent COD reductions resulted in higher values of both  
269 cellulose solubilisation and consumption in the inoculated trials, compared to the unseeded ones in all  
270 the concentrations tested. Although is not possible to discriminate LFL degradation from cellulose  
271 consumption, it is worth mentioning that the presence of *B. adusta* led to higher rate of cellulose  
272 solubilisation and COD decrease, in comparison to unseeded controls.

273 The enzymatic production was positively correlated with cellulose concentration at 2.5 g/L, while at  
274 5.0 g/L cellulose, the activity was clearly lower and there was no correlation between enzyme activity  
275 and COD reduction. In addition, in this specific experiment, an exact quantification of cellulose  
276 solubilisation (allowing discrimination of eventual COD decreases due to degradative processes) could  
277 provide a better understanding of the ability of the fungus to exploit cellulose. The pattern observed is  
278 not surprising, considering *B. adusta* ability to degrade lignin and that other authors have previously  
279 reported its cellulolytic properties. For example, Quiroz-Castañeda *et al.* (2009) assessed the enzymatic  
280 production by *B. adusta* (UAMH 8258) using carboxymethylcellulose (CMC)ase in wheat straw agar  
281 medium and detected higher MnP activity levels compared to other fungi studied in literature. From  
282 this results, we can conclude that the fungal strain could exploit milled cellulose to induce the  
283 production of MnP and that the highest MnP activity was detected using 2.5 g/L of cellulose although,  
284 with this cellulose concentration, incomplete solubilisation and cellulose consumption occurred.

285 Color removal during the experiment is represented in Figure 2C. A slight decrease in the color was

286 observed in all treatments by 24 hrs. However, further significant decolourisation was only observed in  
287 the 2.5 and 5.0 g/L cellulose treatments. In particular, in the 2.5 g/L trial, the greatest color removal  
288 was detected after 96 h, which corresponded to a sharp increase in production of MnP. This result  
289 could suggest the presence of a degradative process carried out by the fungus, since MnP has been  
290 previously indicated as the major enzyme involved in LFL decolourisation (Tigini *et al.*, 2013).

291 In the 5.0 g/L cellulose trial, it is not possible to exclude a partial biodegradation of LFL since  
292 enzymes were observed during the whole experiment, although the correlation of MnP peaks and  
293 decolourisation is less evident, since the enzymatic production was lower. Nevertheless, a close  
294 correspondence between enzymatic activity and decolourisation is not needed to ascribe biodegradation  
295 to peroxidases. Actually, these enzymes are very unstable and readily inactivated by their substrate, but  
296 they activate a chain reaction, which propagates the oxidation over peroxidase inactivation (Anastasi *et*  
297 *al.*, 2010). This can explain the greater level of color removal in the 5.0 g/L of cellulose trial. Even if  
298 adsorption of pigments to fungal biomass could be an alternative explanation of the observed pattern,  
299 the biomass did not show a markedly coloured aspect after the trial, thus this phenomenon had certain a  
300 marginal role.

301 The effect of LFL dilution was assayed using 2.5 g/L of cellulose as co-substrate. This experiment  
302 was performed using free suspended biomass, allowing also the comparison of MnP activity in 100%  
303 LFL with 2.5 g/L of cellulose in suspended versus immobilized cultures. The results of 2.5 g/L of BCC  
304 in 100% and 50% LFL are shown in Figures 3A and 3B. Parameters of LFL used in this experiment  
305 were as following: pH 8.4, COD 1630 (mg/L), sCOD 1620 (mg/L), ammonium nitrogen 940 (mg/L),  
306 BOD<sub>5</sub> 150 mg/L and 0.090 BOD<sub>5</sub>/COD. After dilution, 50% LFL COD and sCOD were 814 ± 23  
307 (mg/L) and 787 ± 24 (mg/L), respectively.

308 Figure 3A reveals that the MnP activity started very early in both trials, reaching 8 U/L after 4 hrs in

309 50% LFL and 4 U/L in 100% LFL, although no significant differences were detected between the  
310 two data sets. Extended analysis of MnP activities from 24 to 240 hrs (Figure 3B) showed that MnP  
311 activities were similar in both treatments, with no statistically significant differences (test-t,  $p > 0.05$ ).  
312 Since a slightly higher MnP production trend was found in 100% LFL, it is reasonable to hypothesize  
313 that the enzymatic activity of the fungus could be a stress response due to the characteristics of LFL,  
314 such as high organic load and/or high ammonium nitrogen concentration. Indeed, several authors have  
315 reported an increased MnP activity in high N conditions (Kaal *et al.*, 1995, Şeker *et al.*, 2008; Anastasi  
316 *et al.*, 2010).

317 It has been observed that LFL characteristics play a crucial role in determining interference on the  
318 enzymatic productions and variability among species and strains can be observed (Ellouze *et al.*, 2009;  
319 Kalčíková *et al.*, 2014). Indeed, LFL used in this study contained approximately 1.0 g/L of ammonium  
320 nitrogen, which is normally problematic to microorganisms. Our understanding from the detected  
321 pattern is that the reduction of organic load and ammonium nitrogen of LFL did not enhance MnP  
322 production in *B. adusta*. This result is closer to the pattern found by Ellouze *et al.* (2009) since these  
323 authors reported MnP reductions starting from 2 g/L of ammonium nitrogen and only a limited delay  
324 was found with 1.0 g/L ammonium.

325 The trends in reduction of COD trend in 100% and 50% LFL are showed in Figure 4. The  
326 differences between COD levels in 100% LFL in the absence of cellulose versus the presence of  
327 cellulose, that cellulose was partially solubilized at the beginning of the experiment. Indeed, only 395  
328 mg/L of COD due to cellulose was present, which correspond to a theoretical concentration of  
329 solubilized cellulose of 260 mg/L. The decrease in COD values between 0 and 48 h is presumably due  
330 to cellulose consumption, which is positively associated with a peak in MnP activity, indicating a  
331 benefit of the fungus due to the co-substrate utilized. Between 48 and 144 hrs, a second step of



332 solubilization occurred, which was followed by a second co-substrate consumption at 192 hrs. The  
333 detected decrease in COD was associated with an increase in the enzymatic production up to 24 U/L.

334 The diluted LFL has a similar pattern, although no co-substrate consumption was detected in the  
335 first 48 hrs of treatment and, therefore, a positive correlation between MnP peak and cellulose  
336 consumption was not observed. The solubilization of cellulose increased, reaching its maximum value  
337 at 144 hrs with 1596 mg/L of COD, attributable to cellulose, and corresponding to a theoretical  
338 concentration of 1.4 g/L of cellulose (56% of the 2.5 g/L cellulose introduced). The COD at 192 hrs  
339 was decreased of 616 mg/L. Although the reduction could not be totally explained by co-substrate  
340 consumption because of the lack of information that can exclude any biodegradative process of  
341 leachate occurred during the treatment, we hypothesize a partial co-substrate consumption, which is  
342 positively correlated with the increase in MnP level from 10 to 21 U/L.

343 In the last part of the experiment, COD decreased and MnP production drastically dropped from 21  
344 to 9 U/L. The data collected do not allow to discriminate the COD decrease due to biodegradation and  
345 the one of co-substrate consumption; however, the final value of COD at the end of the treatment  
346 indicate an incomplete solubilization. In addition, assuming that the COD reduction was totally  
347 attributable to cellulose consumption and no degradative process occurred, the theoretical cellulose  
348 consumption was lower than the COD concentration solubilized from the beginning of the experiment  
349 corresponding to residual 584 mg/L of solubilized cellulose unutilized, which represents 435 mg/L of  
350 cellulose. MnP activity in 100% LFL using suspended biomass was comparable with the one detected  
351 with *B. adusta* immobilized in PUF cubes, since in both cases the maximum MnP activity was 27 U/L.  
352 However, it is possible to observe that in the suspended culture trials, the peak occurred after only 48  
353 hrs of treatment, earlier compared to 192 hrs required to achieve the same activity in immobilized  
354 cultures. In contrast, other studies reported higher enzymatic activities in immobilized cultures  
355 compared to suspended cultures (Rodriguez-Couto *et al.*, 2009; Spina *et al.*, 2012). Due to the

356 difficulties in cellulose solubilization, we can hypothesize that the use of free suspended biomass could  
357 facilitate the contact of the fungus to the co-substrate, enhancing enzymatic production.

358 Malt extract and glucose were added to LFL to evaluate their possible use as co-substrates for LFL  
359 treatment with the selected fungal strain. In Figure 5, a summary of MnP activities in the different  
360 conditions investigated is represented. MnP activities were detected using both co-substrates, malt and  
361 glucose, although slightly higher activities were observed using malt extract alone, which is commonly  
362 used for culturing fungi. From all these batch tests, it is possible to conclude that the selected fungal  
363 strain, *B. adusta* MUT 2295, was able to exploit all the co-substrates, tested in this study, to produce  
364 MnP. However, when comparing MnP activity in all the conditions, it is possible to observe that earlier  
365 activity was detected in suspended cell cultures with cellulose compared with immobilized cells with  
366 cellulose, malt extract or glucose as co-substrate, providing further evidence that the use of suspended  
367 biomass, in the tested conditions, could enhance *B. adusta* ability of expressing MnP.

### 368 3.2 Experiments with packed-bed bioreactors

369 Experiments in continuous bioreactors were performed to estimate the efficiency of fungal treatment  
370 with *B. adusta* on longer term and under non-sterile conditions using cellulose and glucose as co-  
371 substrates in the reactor with glucose (Rg) and in the reactor containing cellulose (Rc), respectively.  
372 Initial batch tests (3.1) revealed total consumption of 0.5 g/L of cellulose during the treatment, and  
373 suggested that the use of this concentration in the initial phase of the bioreactor experiments could  
374 facilitate the quantification of organic removals due to biodegradative processes. The same co-substrate  
375 concentration (0.5 g/L) was added in the bioreactor with glucose (Rg). Parameters of LFL before  
376 dilution are reported in Table 2. LFL was diluted with deionized water before every feeding of the  
377 reactors in order to reduce the organic load, to optimize process efficiency.

378 After dilution, the COD and sCOD of 50% LFL in the Rg bioreactor, were  $782 \pm 20$  mg/L and  $726 \pm$   
379 20 mg/L, respectively. Considering glucose addition as start-up, the initial COD and sCOD of the Rg

380 bioreactor were  $1282 \pm 72$  mg/L and  $1176 \pm 201$  mg/L, respectively. The initial COD and sCOD of  
381 33% LFL in the Rc bioreactor, were  $547 \pm 17$  mg/L and  $535 \pm 19$  mg/L, respectively.

382 COD and sCOD removals achieved with the Rg bioreactor (glucose as co-substrate) are shown in  
383 Figure 6A. The bioreactor was operated for 99 days (approximately 33 times the HRT). Based on the  
384 observed total COD and soluble sCOD Removal Efficiencies (REs), the Rg bioreactor data may be  
385 subdivided in three phases. In the first phase, which covered the first three weeks, average REs of 51%  
386 and 48% were found for COD and sCOD, respectively. The maximum sCOD removal (53% = 695  
387 mg/L of sCOD reduction) was observed after 20 days, and at the same time, the maximum COD  
388 removal was also observed, achieving 63% of COD reduction.

389 The second phase started at day 25 when a sharp decrease in RE was observed. The second phase  
390 did not show a linear pattern of RE and was characterized by fluctuations. The average RE was lower  
391 in the second phase than in the first phase, and corresponded to a decrease of 14% for both, COD and  
392 sCOD. The maximum sCOD removal in the second phase was 18% at day 50, corresponding to 133  
393 mg/L of sCOD depletion, and at the same time, the maximum COD removal was also observed,  
394 reaching 22% of COD reduction.

395 The third phase started at day 60, with an increase in RE for both COD and sCOD. In the third  
396 phase, the average RE was 27% and 24% for COD and sCOD, respectively. An additional increase in  
397 RE was observed after glucose addition (0.5 g/L) at day 75. Increased RE lasted up to day 85,  
398 indicating that co-substrate dosage, although not continuous, could enhance process performance. The  
399 maximum removals, in the third phase, were observed after 80 days, achieving 51% and 44% for sCOD  
400 and COD reduction, respectively.

401 The concentration of Particulate COD, pCOD, in the effluent did not exceed 100 mg/L and did not  
402 present a clear increasing pattern compared to the influent. Since pCOD in the effluent can be due to,  
403 high rate of fungal growth or biomass loss from the cubes related to excessive stress levels, the pattern

404 of pCOD observed in the effluent suggests that fungal biomass was almost stable during the treatment.  
405 The highest pCOD value was 98 mg/L after 14 days of treatment and it can presumably be associated  
406 with an increase in microorganism's growth consequent to glucose addition.

407 Although, a stable RE pattern could not be detected in Rg, the increasing trend of the last part of the  
408 experiment suggests a progressive acclimation of the fungus and associated microorganisms to LFL.  
409 This results is associated with a negligible release of pCOD in the effluent, indicating that fungal  
410 biomass was stable during the treatment.

411 The trend of COD and sCOD removal of the reactor with cellulose are shown in Figure 6B. The  
412 reactor was operated for 69 days. As with the Rg bioreactor, the Rc bioreactor data may be subdivided  
413 in three phases. The first phase occurred within the first 20 days, and the average RE was 10%. The  
414 second phase occurred between day 20 and day 50. The sCOD RE increased between day 20 and 25,  
415 decreased slowly between day 25 and day 46, and then began to increase again up to day 50. The  
416 average RE in the second phase was 20%. In the third phase, the sCOD removal increase sharply after  
417 the addition of 0.5 g/L of glucose on day 53. The average RE in the third phase was 29%. Maximum  
418 COD and sCOD removal during the treatment were 54% and 51%, achieved after co-substrate addition  
419 at day 53 of treatment.

420 Important COD increases in the effluent, compared to the influent, were not detected, suggesting  
421 that the co-substrate was consumed during the treatment, as was previously observed during batch tests.  
422 Although several fluctuations, also in the reactor with cellulose, effluent pCOD was negligible  
423 compared to the amount of the inoculated fungal biomass. Moreover, it was similar to the amount  
424 recorded in the influent, suggesting that the biomass was stable during the treatment. Also in this case,  
425 a peak in pCOD was found after co-substrate addition at day 55 with 137 mg/L of pCOD, providing  
426 further evidence of biomass growth after co-substrate addition.

427 Although similar values of maximum sCOD removal in the two reactors were reached, it is

428 important to notice that they occurred in two different timing, suggesting that the complementary effect  
429 of the two co-substrates could be exploited by adding glucose as start-up and cellulose in a second step  
430 of the treatment. The results achieved in both reactors indicate that also non-continuous co-substrate  
431 addition could led to satisfactory RE rates, reducing the costs of continuous co-substrate dosage.  
432 Hence, sporadic co-substrate addition could be exploited to enhance RE, when necessary.

433 A complete understanding of the process occurred could be achieved through additional detailed  
434 chemical characterization of LFL to assess eventual compounds rearrangements due to the degradative  
435 process. Moreover, molecular characterization of the microbial components during the treatment could  
436 allow to understand to which extent the fungus contributed to autochthonous microbial community.

437 To our knowledge, this study is the first report of fungal treatment toward old LFL performed in  
438 continuous and under non-sterile conditions. Indeed, previous studies concerning fungal treatment  
439 toward old LFL were performed on batch (Kalčíková *et al.*, 2014).

440 The major drawbacks that limit scaling-up to larger volumes and full-scale fungal applications are:  
441 i) a predilection the fungal biomass to generate low pH (Anastasi *et al.*, 2010), ii) the requirement for  
442 an additional carbon source; iii) the need for further steps for ammonia removal; and iv) the difficulties  
443 in maintaining long-term efficiency in non-sterile conditions (Kalčíková *et al.*, 2014). In addition,  
444 fungal needs and responses to medium feeding, and the development of agitation/aeration rates and  
445 methodologies that minimize the inhibition of hyphal growth and strengthen fungal metabolism are still

446 The first study in continuous of fungal treatment on LFL was reported on young LFL. Saetang and  
447 Babel (2009) carried out continuous fungal treatment on young LFL according to different conditions,  
448 reporting a maximum COD removal of 42% with 3.0 g/L of glucose and an increasing pattern in RE  
449 during 20 days of experiment. This pattern is similar to the first leg of our experiment, using glucose,  
450 although co-substrate nature and concentration differed within the two studies. The same authors  
451 reported also 23% of COD removal without adding co-substrate in 4 cycles of treatment. This result

452 was similar to the second stage of both our experiments, in which co-substrate was probably depleted.  
453 Experiments about aerobic granular sludge treatment of LFL collected from the same landfill in the  
454 same timing of our study (Ren and Yuan, 2016) resulted in a COD removal of 50% using LFL  
455 concentrations lower than 60% and 25% of COD removal with 70% of LFL. Considering that  
456 microorganism's acclimation can result in higher performance, our REs have been achieved in  
457 relatively short amounts of time. In addition, due to the lack of chemical characterization of the  
458 compounds depleted in both treatments, a possible combined approach of aerobic granular sludge and  
459 fungi can be evaluated to enhance RE of LFL. The results achieved in this study are promising  
460 considering the nature of old LFL, characterized by low availability of organic load. A further step  
461 would understanding which compounds have been degraded and if the treatment proposed in this study  
462 could enhance the performance of conventional biological processes, including activated sludge and  
463 aerobic granular one, on old LFL itself.

#### 464 **4.0 Conclusions**

465 Enzymatic production and COD removal of *B. adusta* from old LFL were investigated as a function  
466 of co-substrate and dilution, revealing the basidiomycetes capability to exploit cellulose, malt extract  
467 and glucose as co-substrates. Continuous tests, with irregular co-substrate additions, showed a  
468 significant increase in RE after the dosages, resulting in a maximum sCOD removal of 52% and 51%  
469 after 20 and 54 days using glucose and cellulose as co-substrate, respectively. The treatment seems to  
470 be promising and its possible exploitation to complement state of art technologies could be evaluated to  
471 optimize recalcitrant compounds removal from old LFL.

#### 472 **5.0 Acknowledgment**

473 The authors thank FIR RBFR13V3CH, Carbala Project PIRSES-GA-2011-295176, the company  
474 TENAX Corporation for providing cages' material, and the Mycoteca Universitatis Taurinensis (MUT)  
475 for providing the fungal strain.

476 **References**

- 477 1. Agbor, V., Blunt, W., Cicek, N., Sparling, R., Berlin, A., Levin, D. B., 2011. Processing of  
478 cellulosic feedstocks for ethanol and hydrogen production. *J-FOR*. 1(3), 54.
- 479 2. Anastasi, A., Spina F., Prigione, V., Tigini, V., Giansanti, P., Varese, G.C., 2010. Scale-up of a  
480 bioprocess for textile wastewater treatment using *Bjerkandera adusta*. *Bioresour. Technol.* 101,  
481 3067-3075.
- 482 3. Bardi, A., Tigini, V., Spina, F., Varese, G.C., Spennati, F., Di Gregorio, S., Petroni, G., Yuan  
483 Q., Munz, G. 2016. Treatment Of Raw Leachate And Synthetic Recalcitrant Compounds Using  
484 A Selected White Rot Fungus. In: *Proceedings Of Sidisa 2016, X International Symposium On  
485 Sanitary And Environmental Engineering*. Roma, 19-23 June 2016, Italy.
- 486 4. Batarseh, E.S., Reinhart, D.R., Berge, N.D. 2010. Sustainable disposal of municipal solid waste:  
487 post bioreactor landfill polishing. *Waste Manage.* 30, 2170–2176.
- 488 5. Bohdziewicz, J., Kwarciak, A. 2008. The application of hybrid system UASB reactor-RO in  
489 landfill leachate treatment. *Desalination*. 222,128–134.
- 490 6. Castellana, G., Loffredo, E., 2014. Simultaneous removal of endocrine disruptors from a  
491 wastewater using white-rot fungi and various adsorbents. *Water, Air, Soil Pollut.* 225,1872.  
492 DOI 10.1007/s11270-014-1872-6
- 493 7. Di Gregorio, S., Becarelli, S., Siracusa, G., Ruffini Castiglione, M., Petroni, G., Masini, G.,  
494 Gentini A. de Lima e Silva M.R., Lorenzi, R., 2016. *Pleurotus ostreatus* spent mushroom  
495 substrate for the degradation of polycyclic aromatic hydrocarbons: the case study of a pilot  
496 dynamic biopile for the decontamination of a historically contaminated soil. *J. Chem. Technol.  
497 Biot.* 91(6), 1654-1664.
- 498 8. Ellouze, M., Aloui, F., Sayadi, S., 2008. Performance of biological treatment of high level  
499 ammonia landfill leachate. *Environ. Technol.* 29, 1169–1178.

- 500 9. Ellouze, M., Aloui, F., Sayadi, S., 2009. Effect of high ammonia concentrations on fungal  
501 treatment of Tunisian landfill leachates. *Desalination*. 246 (1), 468-477.
- 502 10. Fang, J.Z, Huang, S.B., 2002. Process of oxidation by white-rot-fungi and coagulation for  
503 treating bleaching effluents. *Environ. Sci. Technol.* 25, 12–13.
- 504 11. Ghosh, P., Swati, Thakur, I.S. 2014a. Enhanced removal of COD and color from landfill  
505 leachate in a sequential bioreactor. *Bioresour. Technol.* 170, 10-19.
- 506 12. Ghosh, P., Das, M. T., Thakur, I. S. 2014b. Mammalian cell line-based bioassays for  
507 toxicological evaluation of landfill leachate treated by *Pseudomonas sp.* *ISTDF1. Environ. Sci.*  
508 *Pollut. Res.* 21(13), 8084-8094.
- 509 13. Ghosh, P., Thakur, I. S. 2016. Biosorption of landfill leachate by *Phanerochaete sp.* *ISTL01:*  
510 *isotherms, kinetics and toxicological assessment. Environ. Technol.* 1-12.
- 511 14. Gourdon, R., Comel, C., Vermande, P., Veron, J. 1989. Fractionation of the organic matter of a  
512 landfill leachate before and after aerobic or anaerobic biological treatment. *Water Res.* 23(2),  
513 167-173.
- 514 15. Gullotto, A., Lubello, C., Mannucci, A., Gori, R., Munz, G., Briganti, F., 2015. Biodegradation  
515 of naphthalenesulphonate polymers: the potential of a combined application of fungi and  
516 bacteria. *Environ. Technol.* 36(4), 538-545.
- 517 16. Jones, D. L., Williamson K. L., Owen A. G., 2006. Phytoremediation of landfill leachate. *Waste*  
518 *Manage.* 26(8), 825-837.
- 519 17. Kaal, E. E., Field, J. A., Joyce, T. W. 1995 Increasing ligninolytic enzyme activities in several  
520 white-rot basidiomycetes by nitrogen-sufficient media. *Bioresour. Technol.* 53(2), 133-139.
- 521 18. Kalčíková, G., Zagorc-Končan, J., Zupančič, M., Gotvajn, A. Ž., 2012. Variation of landfill  
522 leachate phytotoxicity due to landfill ageing. *J. Chem. Technol. Biot.* 87(9), 1349-1353.
- 523 19. Kamaruddin, M. A., Yusoff, M. S., Aziz, H. A., Hung, Y. T., 2014. Sustainable treatment of



- 524 landfill leachate. Appl. Water Sci. 5(2),113-126.
- 525 20. Kissi, M., Mountadar, M., Assobhei, O., Gargiulo, E., Palmieri, G., Giardina, P., Sannia, G.,  
526 2001. Roles of two white-rot basidiomycete fungi in decolorisation and detoxification of olive  
527 mill waste water. Appl. Microbiol. Biotechnol. 57(1-2), 221-226.
- 528 21. Kumari, M., Ghosh, P., Thakur, I. S. 2016. Landfill leachate treatment using bacto-algal co-  
529 culture: An integrated approach using chemical analyses and toxicological assessment.  
530 Ecotoxicol. Environ. Saf.128, 44-51.
- 531 22. Li W., Qixing Z., Tao H., 2010. Review Article. Removal of Organic Matter from Landfill  
532 Leachate by Advanced Oxidation Processes: A Review. Int. J. of Chem. Eng. ID 270532.  
533 doi:10.1155/2010/270532.
- 534 23. Loffredo, E., Castellana, G., Taskin, E., 2016. A Two-Step Approach to Eliminate Pesticides  
535 and Estrogens from a Wastewater and Reduce Its Phytotoxicity: Adsorption onto Plant-Derived  
536 Materials and Fungal Degradation. Water, Air, Soil Pollut. 227(6), 1-12.
- 537 24. Lopez, C., Midgo, I., Moreira, M.T., Feijoo, G., Lema, J.M., 2002. Enzymatic membrane  
538 reaction for biodegradation of recalcitrant compounds. Application to dye decolorization. J.  
539 Biotechnol. 99, 249–257 .
- 540 25. Marco-Urrea, E., Pérez-Trujillo, M., Vicent, T., Caminal, G., 2009. Ability of white-rot fungi to  
541 remove selected pharmaceuticals and identification of degradation products of ibuprofen by  
542 *Trametes versicolor*. Chemosphere. 74(6), 765-772.
- 543 26. Neczaj, E., Kacprzak, M., 2007. Ultrasound as a pre-oxidation for biological landfill leachate  
544 treatment. Water Sci. Technol. 55 (12), 175.
- 545 27. Nghiem, L. D., Hai, F. I., Listowski, A., 2016. Water reclamation and nitrogen extraction from  
546 municipal solid waste landfill leachate. Desalin. Water Treat. 1-8.
- 547 28. Palli, L., Gullotto, A., Tilli, S., Caniani, D., Gori, R., Scozzafava, A., 2016. Biodegradation of

- 548 2-naphthalensulfonic acid polymers by white-rot fungi: Scale-up into non-sterile packed bed  
549 bioreactors. *Chemosphere*. 164, 120-127.
- 550 29. Peyravi, M., Jahanshahi, M., Alimoradi, M., Ganjian, E., 2016. Old landfill leachate treatment  
551 through multistage process: membrane adsorption bioreactor and nanofiltration. *Bioprocess*  
552 *biosyst eng.* 39(12), 1803-1816.
- 553 30. Quiroz-Castañeda, R.E., Balcázar-López, E., Dantán-González, E., Martínez, A., Folch-Mallol,  
554 J., Martínez, Anaya, C. 2009. Characterization of cellulolytic activities of *Bjerkandera adusta*  
555 and *Pycnoporus sanguineus* on solid wheat straw medium. *Electron. J. Biotechnol.* 12, 1–8.
- 556 31. Razarinah, W., Zalina, M. N., Abdullah, N. 2015. Utilization of the white-rot fungus, *Trametes*  
557 *menziesii* for landfill leachate treatment. *Sains Malays.* 44(3), 309-316.
- 558 32. Ren, Y., Yuan, Q. 2016. The Treatment of Landfill Leachate Using Aerobic Granular Sludge.  
559 3rd IWA Specialized International Conference “Ecotechnologies For Wastewater Treatment”  
560 (Ecostp16) 27-30 June 2016, Cambridge, UK.
- 561 33. Renou, S., Givaudan, J. G., Poulain, S., Dirassouyan, F., Moulin, P. 2008. Landfill leachate  
562 treatment: Review and opportunity. *J. Hazard. Mater.* 150(3), 468-493.
- 563 34. Rodríguez-Couto, S, Osma, J.F., Toca-Herrera, J.L. 2009. Removal of synthetic dyes by an eco-  
564 friendly strategy. *Eng. Life Sci.* 9: 116–123.
- 565 35. Rodríguez-Couto, S., 2013. Treatment of textile wastewater by white-rot fungi: still a far away  
566 reality? *TLIST.* 2, 113–119.
- 567 36. Saetang, J., Babel, S. 2009. Effect of leachate loading rate and incubation period on the  
568 treatment efficiency by *Trametes versicolor* immobilized on foam cubes. *Int. J. Environ. Sci.*  
569 *Technol.* 6(3), 457-466.
- 570 37. Saetang, J., Babel, S., 2012. Biodegradation of organics in landfill leachate by immobilized  
571 white rot fungi, *Trametes versicolor* BCC 8725. *Environ. Technol.* 33 (22), 2575-2584.

- 572 38. Şeker, U.O.S., Catal, T., Taptik, Y. 2008. Enhanced production of manganese-peroxidase by  
573 the white-rot fungus *Bjerkandera adusta* using media engineering. *Biotechnol. Biotechnol.*  
574 *Equip.* 22, 844–848.
- 575 39. Spina, F., Anastasi, A., Prigione, V., Tigini, V., Varese, G. C., 2012. Biological treatment of  
576 industrial wastewaters: a fungal approach. *Chem. Eng.* 27.
- 577 40. Spina, F., Romagnolo, A., Prigione, V., Tigini, V., Varese, G. C., 2014. A Scaling-up issue: the  
578 optimal bioreactor configuration for effective fungal treatment of textile wastewaters. *Chem.*  
579 *Eng. Trans.* 38, 37-42.
- 580 41. Standard Methods for the Examination of Water and Wastewater 1998 20<sup>th</sup> edn, American  
581 Public Health Association/American Water Works Association/Water Environment Federation,  
582 Washington DC, USA.
- 583 42. Tigini, V., Spina, F., Romagnolo, A., Prigione, V., Varese, G. C., 2013. Effective biological  
584 treatment of landfill leachates by means of selected white rot fungi. *Chem. Eng. Trans.* 32, 265-  
585 270.
- 586 43. Tigini, V., Prigione, V., Varese, G. C., 2014. Mycological and ecotoxicological characterisation  
587 of landfill leachate before and after traditional treatments. *Sci. Total Environ.* 487, 335-341.
- 588 44. Umar, M., Aziz, H. A., Yusoff, M.S., 2010. Variability of parameters involved in leachate  
589 pollution index and determination of LPI from four landfills in Malaysia. *Int. J. Chem. Eng.*  
590 doi:10.1155/2010/747953.
- 591 45. Vedrenne, M., Vasquez-Medrano, R., Prato-Garcia, D., Frontana-Uribe, B.A., Ibanez, J.G.  
592 2012. Characterization and detoxification of a mature landfill leachate using a combined  
593 coagulation–flocculation/photo Fenton treatment. *J. Hazard. Mater.* 205–206 (205) 208–210.
- 594 46. Vyas B., Volc J. Šašek V., 1994. Ligninolytic enzymes of selected white rot fungi cultivated on  
595 wheat straw. *Folia Microbiol.* 39(3), 235-40. doi: 10.1007/BF02814655.

- 596 47. Wesenberg, D., Kyriakides, I., Agathos, S.N. 2003. White-rot fungi and their Enzymes for the  
597 treatment of industrial dye effluents. *Biotechnol. Adv.* 22 (1-2),161-187.
- 598 48. Zhao, J., Lu, X. Q., Luo, J. H., Liu, J. Y., Xu, Y. F., Zhao, A. H., Liu, F., Tai J., Qian G.R.,  
599 Peng, B., 2013a. Characterization of fresh leachate from a refuse transfer station under different  
600 seasons. *Int. Biodeterior. Biodegrad.* 85, 631-637.
- 601 49. Zhao, R., Gupta, A., Novak, J. T., Goldsmith, C. D., Driskill, N. 2013b. Characterization and  
602 treatment of organic constituents in landfill leachates that influence the UV disinfection in the  
603 publicly owned treatment works (POTWs). *J. Hazard. Mater.* 258, 1-9.
- 604

605 **Figure Captions**

606 **Figure 1.** Representation of the Packed-bed bioreactor design: 1) feeding tank; 2) pH controller; 3) pH  
607 probe; 4) acid solution to adjust pH; 5) mixer engine; 6) cage equipped with polyurethane foam carriers  
608 (PUF); 7) air-sparger; 8) aerator; 9) outlet tank.

609  
610 **Figure 2.** Batch tests results using BCC 0.5, 1.0, 2.5, and 5.0 g/L. A) MnP activity during the test. Bars  
611 represented standard deviation (S.D.) among replicates; B) COD trend in the four trials, indicated as T,  
612 in the respective unseeded controls, indicated as C, and 100% LFL. BCC concentration is shown in g/L  
613 to discriminate the trials; C) Decolouration percentage (D.P.) during the test. Values are given as  
614 average among three replicates and bars are standard deviations (S.D.) of the means. Negative values  
615 should be considered as an increase in the spectrum area.

616  
617 **Figure 3.** A) Enzymatic production (MnP) using suspended biomass and 2.5 g/L cellulose (BCC)  
618 during the first 6 hours of treatment; B) Enzymatic production (MnP) in the same conditions of (A)  
619 from 24 h until the end of the treatment. In a) and b) bars represented standard deviations (S.D.) of the  
620 means. .

621  
622 **Figure 4.** COD trends (mg/L) in experiments with suspended biomass and 50% or 100% LFL, using  
623 2.5 g/L of cellulose (BCC).

624  
625 **Figure 5.** MnP enzyme activities tested in batch reactions with cellulose (BCC) versus glucose. *B.*  
626 *adusta* was immobilized in all the trials except BCC 2.5 g/L, LFL 50%, and LFL 100 %, where *B.*  
627 *adusta* was grown as a suspended culture. Bars represented standard deviations (S.D.) of the means..

628  
629 **Figure 6.** A) COD and sCOD removal (%) during continuous treatment in the bioreactor with glucose.  
630 1 and 2 indicate glucose (0.5 g/L) additions. Vertical lines show the different phases during reactor's  
631 operating time; B) COD and sCOD removal (%) during continuous treatment in the reactor with  
632 cellulose start-up. 1 indicates glucose (0.5 g/L) addition. Vertical lines show the different phases during  
633 reactor's operating time.

634  
635  
636

637 **Table 1.** Parameters of LFL used during batch experiments with cellulose. Values are given as average  
638 three replicates. Standard deviations (S.D.) are indicated in the third column, with minimum and  
639 maximum values in the fourth and fifth columns, respectively.

640

<b>Parameter</b>	<b>Average</b>	<b>S.D.</b>	<b>Min.</b>	<b>Max.</b>
<b>pH</b>	8.55	0.07	8.50	8.60
<b>COD (mg/L)</b>	2265	2.82	2263	2267
<b>sCOD (mg/L)</b>	2052	262.13	2238	1867
<b>BOD<sub>5</sub> (mg/L)</b>	175	35	150	200
<b>BOD<sub>5</sub>/COD</b>	0.077	-	-	-
<b>NH<sub>4</sub>-N (mg/L)</b>	930	198	790	1070

641

642

643

644

645

646

647

648

649

650

651

652

653

654

655

656

657

658

659


660

661

662 **Table 2.** Characterization of LFL used during the experiment with bioreactors. Values are given as  
 663 averages of three replicated experiments over the whole operating time. Standard deviations (S.D.) are  
 664 indicated in the third column, with minimum and maximum values in the fourth and fifth columns,  
 665 respectively

<b>Parameter</b>	<b>Average</b>	<b>S.D</b>	<b>Min.</b>	<b>Max</b>
<b>pH</b>	8.5	0.14	8.4	8.6
<b>COD</b>	1585	108	1388	1761
<b>sCOD</b>	1471	99	1335	1676
<b>BOD<sub>5</sub></b>	175	35	200	350
<b>NH<sub>4</sub>-N</b>	725	202	398	1070


669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700

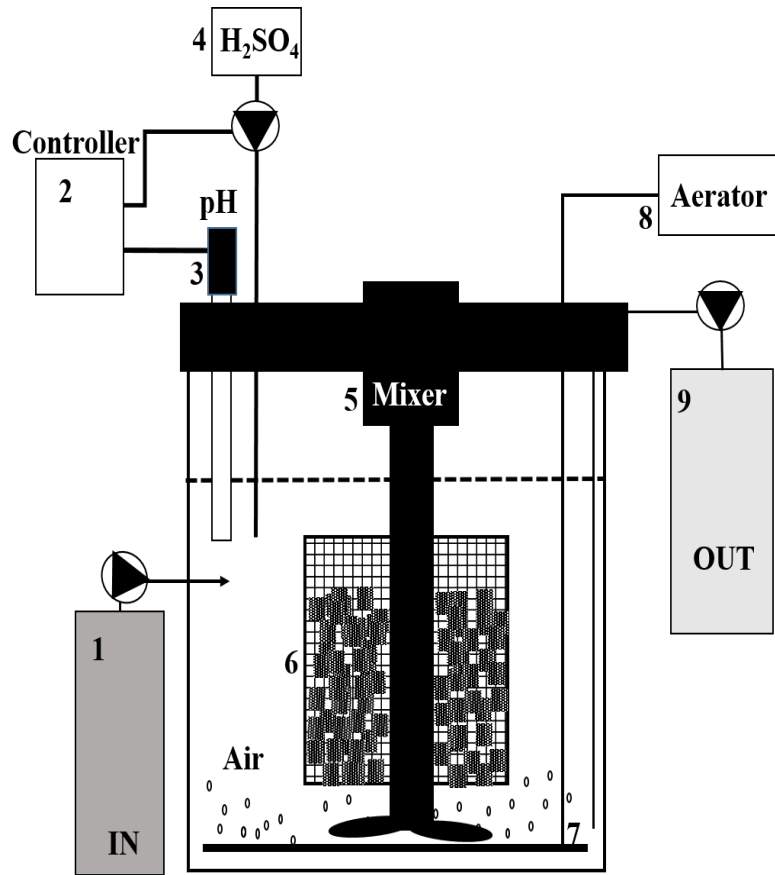

**Figure 1.**




701 **A**

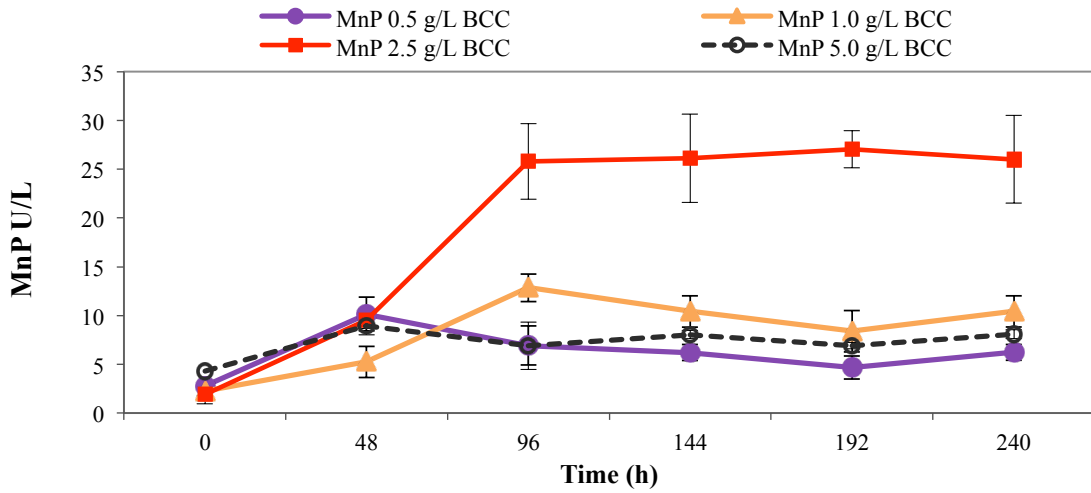


702

703 **B**

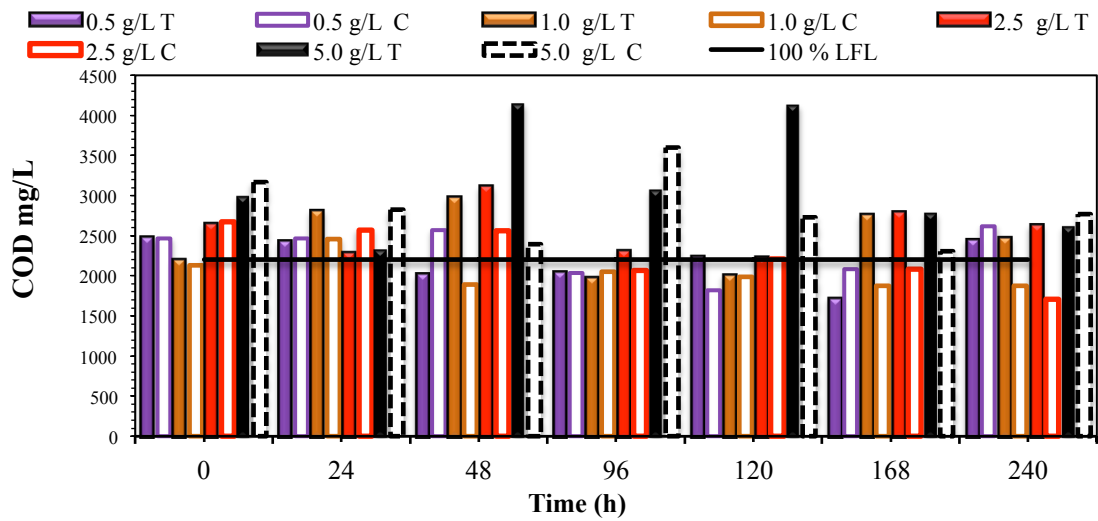

711

712 **C**

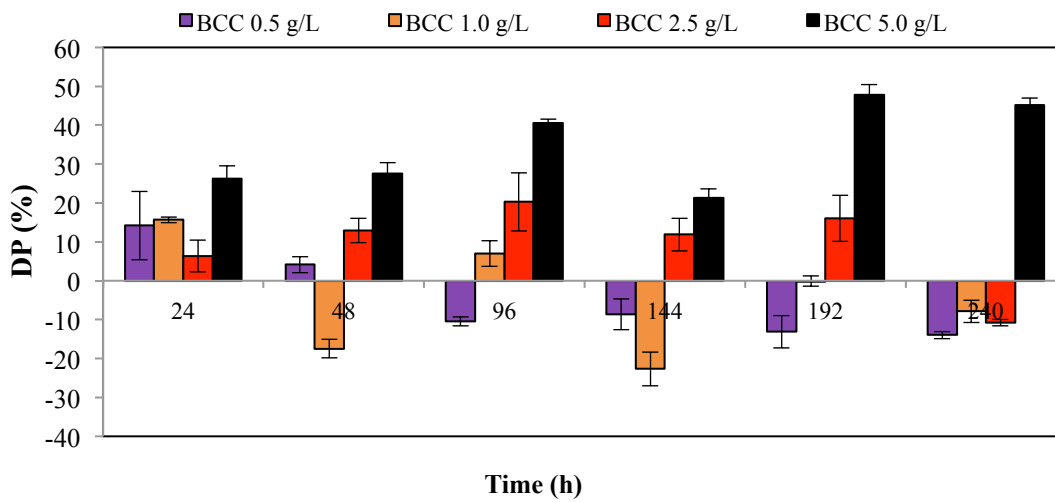


720


721

722 **Figure 2.**

723 **A**

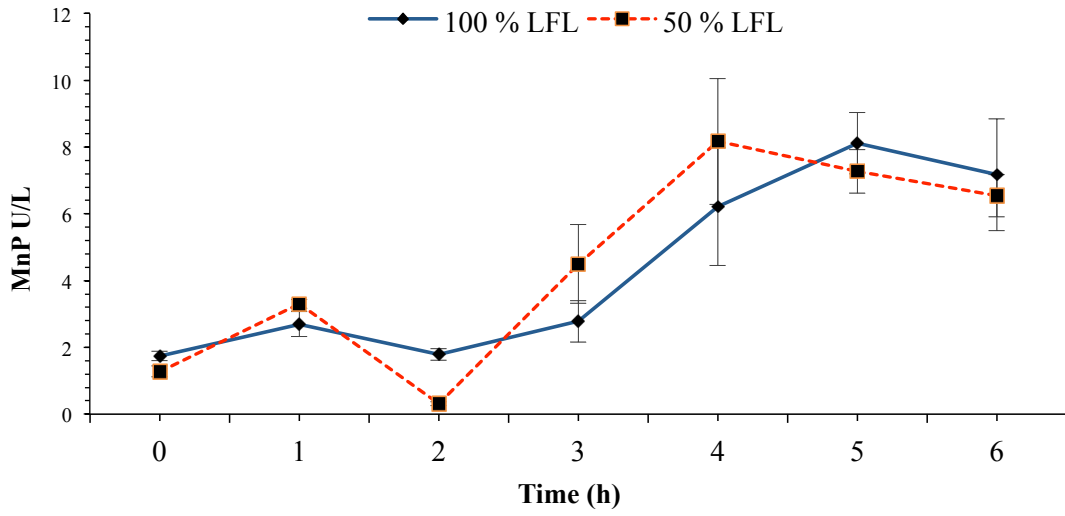


724 **B**

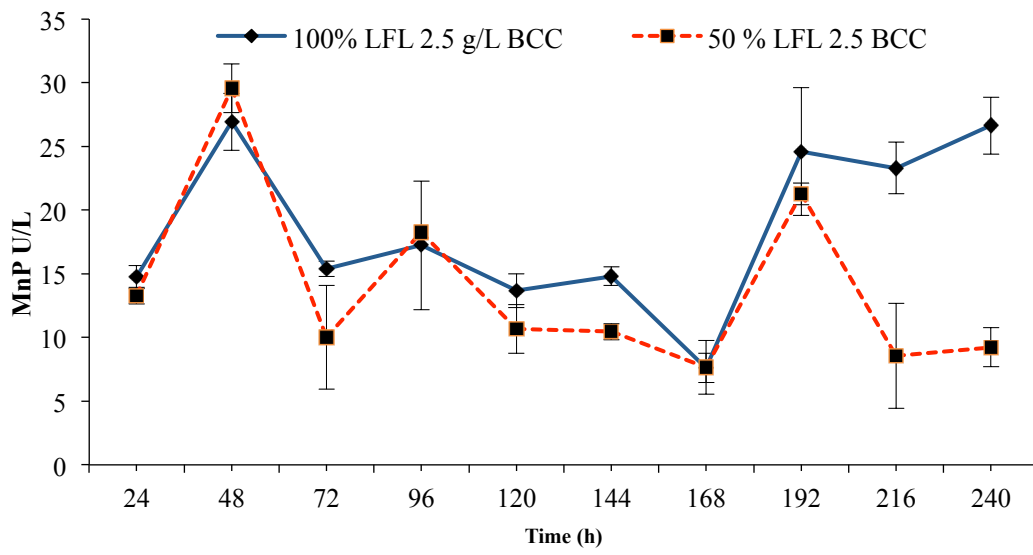

737 **Figure 3.**

738

739

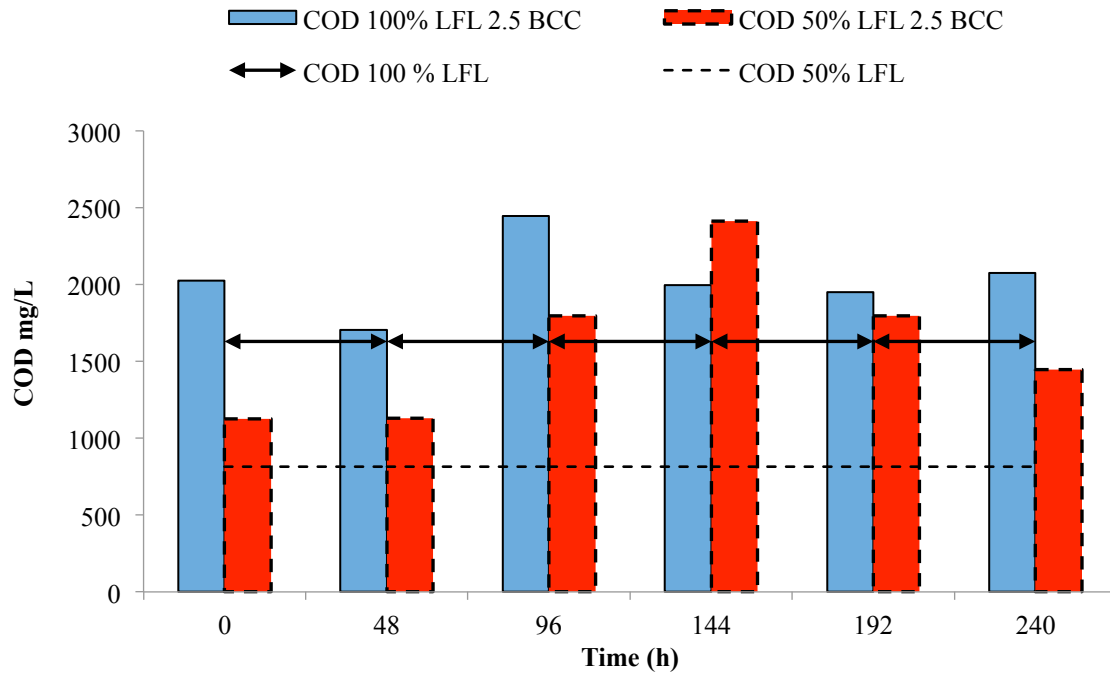


740

741 **Figure 4.**

742

743

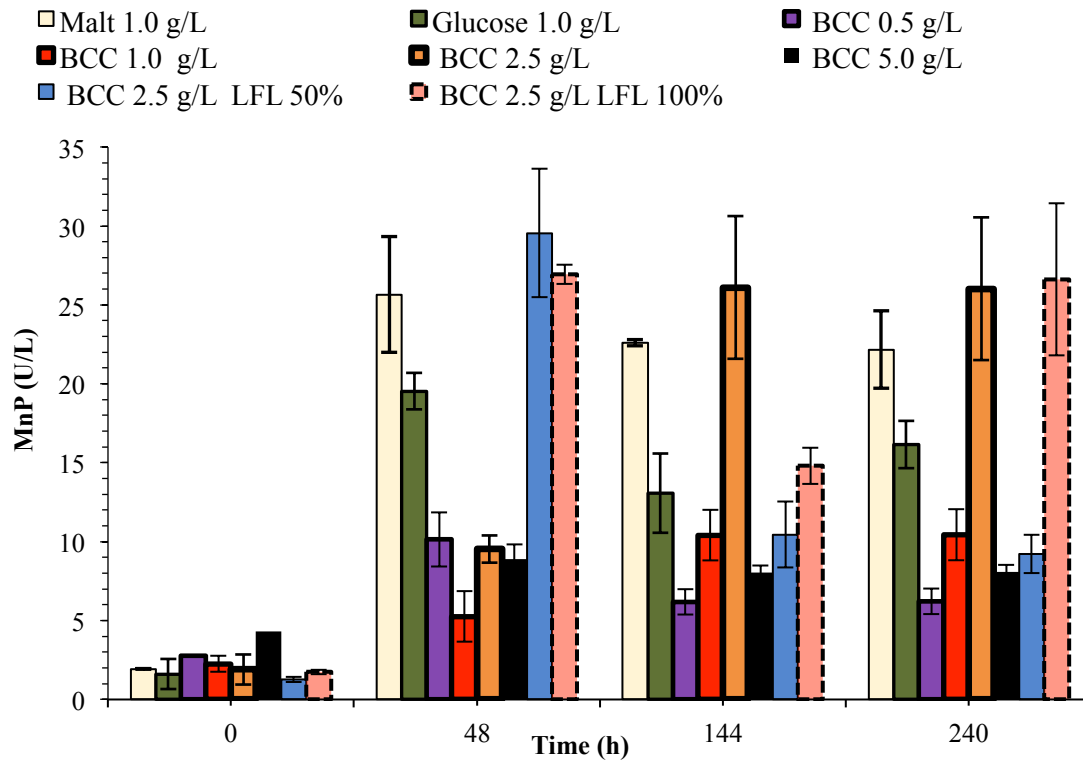

745


746

747 **Figure 5.**

748

749


750 **A**

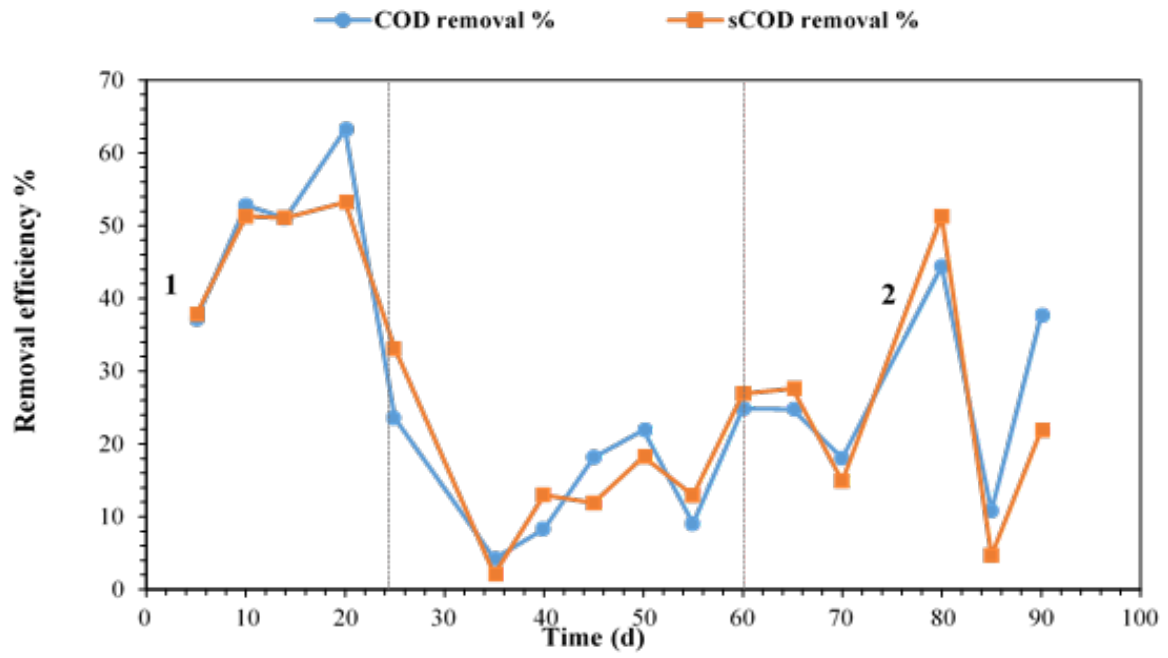

751

752

753 **B**

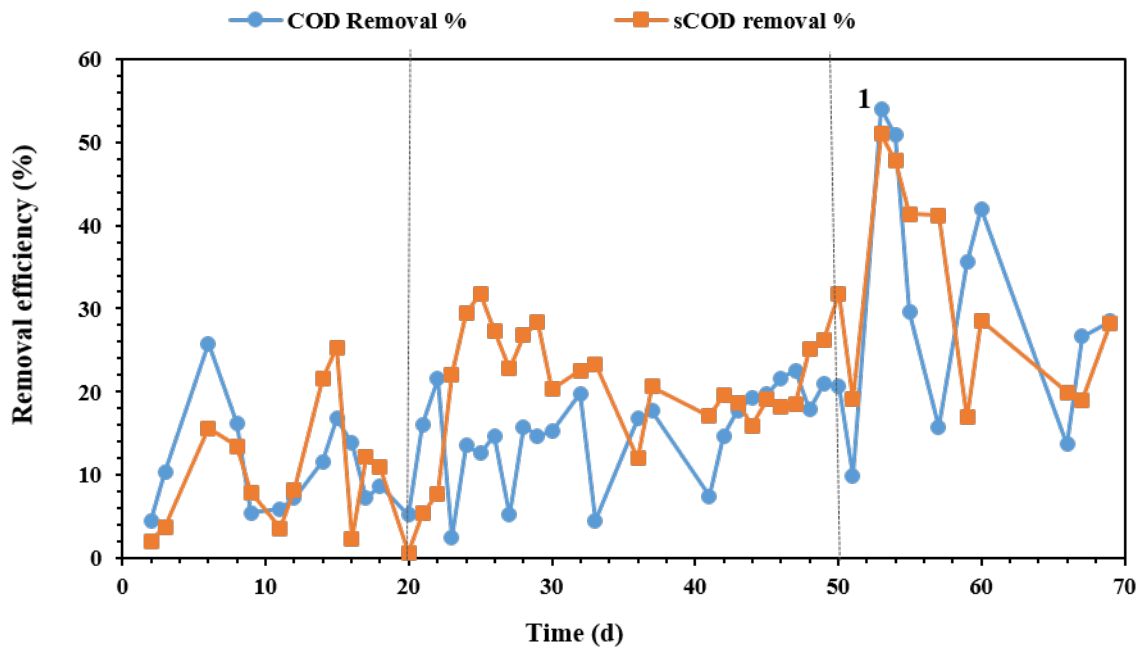

754

755 **Figure 6.**

756