

AperTO - Archivio Istituzionale Open Access dell'Università di Torino

Ergonomic analysis of the effects of a telehandler's active suspended cab on Whole Body Vibration level and operator comfort.

This is the author's manuscript

Original Citation:

Availability:

This version is available <http://hdl.handle.net/2318/1528203> since 2017-11-02T23:53:55Z

Published version:

DOI:10.1016/j.ergon.2015.10.009

Terms of use:

Open Access

Anyone can freely access the full text of works made available as "Open Access". Works made available under a Creative Commons license can be used according to the terms and conditions of said license. Use of all other works requires consent of the right holder (author or publisher) if not exempted from copyright protection by the applicable law.

(Article begins on next page)



UNIVERSITÀ DEGLI STUDI DI TORINO

This is an author version of the contribution published on:

Questa è la versione dell'autore dell'opera:

Ergonomic analysis of the effects of a telehandler's active suspended cab on Whole Body Vibration level and operator comfort

Caffaro F., Micheletti Cremasco M., Preti C., Cavallo E., 2015.

International Journal of Industrial Ergonomics, vol. 53: 16-29

doi: 0.1016/j.ergon.2015.10.009

The definitive version is available at:

La versione definitiva è disponibile alla URL:

<http://www.sciencedirect.com/science/article/pii/S0169814115300469>

RUNNING HEAD: Active suspension system in telehandlers: an ergonomic analysis of WBV and comfort

Ergonomic analysis of the effects of a telehandler's active suspended cab on Whole Body Vibration level and operator comfort

Federica Caffaro^a, Margherita Micheletti Cremasco^b, Christian Preti^a, Eugenio Cavallo^a

^a Institute for Agricultural and Earthmoving Machines (IMAMOTER), Italian National Research Council (CNR), Strada delle Cacce, 73 – 10135 Torino, Italy; f.caffaro@ima.to.cnr.it, c.preti@imamoter.cnr.it, e.cavallo@imamoter.cnr.it

^bDepartment of Life Sciences and Systems Biology, University of Turin, via Accademia Albertina, 13 – 10123, Torino, Italy; margherita.micheletti@unito.it

Please address correspondence to:

Eugenio Cavallo

IMAMOTER - CNR

Strada delle Cacce 73

10135 Torino

Italy

Phone: +39 011 3977724

Fax: +39 0113489218

E-mail: e.cavallo@imamoter.cnr.it

32 **ABSTRACT**

33 **INTRODUCTION:** Exposure to whole body vibration (WBV) is one of the most important risks for
34 musculoskeletal disorders (MSDs). The objective of the study was to investigate whether an active
35 cab suspension system fitted on a telehandler was effective in reducing WBV and in improving
36 comfort.

37 **METHOD:** Sixteen male healthy professional operators drove a telehandler on a 100m ISO 5008
38 smooth track at two different speeds (5 and 12 kph) with activated and deactivated cab suspension
39 system. Adopting an ergonomic approach, different aspects of the human-machine interaction were
40 analyzed: 1) vibration transmissibility, 2) subjective ratings of general comfort and local body
41 discomfort, and 3) anthropometric characteristics of the users.

42 **RESULTS:** A series of ANCOVAs showed that the suspension system was effective in reducing
43 WBV at both speeds but did not affect the perception of comfort by the operators. Moreover,
44 individuals with higher Body Mass Index (BMI) experienced more comfort. Some neck/shoulder
45 and lumbar complaints and perceived hard jolts seemed to remain even when the system was
46 activated. No correlations were found between objective and subjective measures.

47 **PRACTICAL APPLICATIONS:** Results suggest that the operators, given their wide range of
48 physical variability, may need more adjustable or customizable WBV reduction systems.

49

50 *Keywords: Active suspension; Anthropometric variability; Comfort; Telehandler; Whole-body*
51 *vibration transmissibility*

52

53 **1. INTRODUCTION**

54 *1.1 Background and motivation*

55 Exposure to whole body vibration (WBV) has been identified as one of the most important risks for
56 musculoskeletal disorders (MSDs) (Lyons, 2002; Osborne et al., 2012), having severe effects on

low-back pain, neck-shoulder disorders, early degeneration of the spine and herniated discs (Bovenzi & Zadini, 1992; Griffin, 1990; Kittusamy & Buchholz, 2004). MSDs are a main issue of concern in agricultural industry: in the United States, a 2008 report showed that about 20 percent of farm workers suffer from musculoskeletal injuries (Kandel, 2008). In Europe, 2,070,000 out of over 40 millions occupational diseases among agricultural operators are MSDs (EU OSHA, 2010). Agricultural and earth-moving machinery operators are particularly at risk because they are usually exposed to vehicle vibrations for a long time (Mayton et al., 2008): indeed they typically spend many hours on the machine (Lin, 2011) and they have to accomplish many operations on different types of uneven terrain (Wikström, 1993), with the vehicle moving at various forward speeds (Lines et al., 1995; Scarlett et al., 2007).

The awareness of the risks related to WBV exposure led to the development of standards and requirements to maintain healthy working conditions. The development of WBV standards started in 1966 in Europe, resulting in the publication of ISO 2631 (Paschold & Sergeev, 2009). This standard is included into the European Commission Directive 2002/44/EC as a framework to measure, with the appropriate frequency weightings, the daily WBV exposure. The Directive imposes, on the European Union countries, duties on employers to protect employees who may be exposed to WBV vibration at work, and other persons who might be affected by the vibrations, whether they are at work or not. A partially different situation exists in the United States, where the WBV exposure limits are based upon the ISO 2631 standard but are voluntary (Paschold & Sergeev, 2009).

In order to comply with rules and standards and to promote operators' health, safety and comfort, many technological and design innovations have been introduced on vehicles by manufacturers during last decades (for a review, see Donati, 2002 and Tiemessen et al., 2007). Innovations range from suspended seats (Hostens et al., 2004) to correct ergonomic layout of vehicle interior (Pope et al., 1998) and to cab suspension systems (Velmurugan et al., 2012). Concerning cab suspension, different solutions have been developed, from passive systems to more recent semi-active and

83 active ones (Fischer & Isermann, 2004): active systems in particular represent an important
84 innovation, not only for WBV control but also for the improvement of ride quality, handling and
85 performance under different operating conditions (Ikenaga et al., 2000; Wong, 2001).

86 The effects of passive and semi-active cab suspension systems on WBV exposure have been
87 investigated on many vehicles: agricultural tractors (Scarlett et al., 2007), fork lift trucks (Lemerle
88 et al., 2002) and harvesters (Deprez et al., 2005). Less is known about active systems, and in
89 particular with regard to telescopic handlers (telehandlers). These vehicles are indeed little
90 investigated (Mansfield et al., 2009; Strambi et al., 2012) and not typically involved in user trials
91 assessing WBV exposure, despite the fact that the telehandler is a versatile and widespread vehicle
92 used on different off-road applications (construction, agriculture, mining, etc.) on uneven terrains
93 and for a large number of different operations (Bertani, 2014).

94 Studies evaluating the effectiveness of suspension systems typically adopt an objective/mechanical
95 approach, focusing in particular on acceleration and frequency analysis to determine workers'
96 exposure limit and action values stated by rules and standards (De Temmerman et al., 2005;
97 Hansson, 1995). Nonetheless, current sales trends show that the operator's comfort is becoming
98 more and more important in determining the market value of agricultural machines (Vink, 2005).

99 Previously, customers wished that their basic needs would be fulfilled at an affordable cost, while,
100 in recent years, customers' decision to purchase a machine has become increasingly influenced by
101 comfort (Cavallo et al., 2014a; Krause & Bronkhorst, 2003). Furthermore, comfort is one of the
102 technological trajectories adopted by off-road vehicle manufacturers to develop their products
103 (Cavallo et al., 2014b; Cavallo et al., 2015).

104 Many previous studies showed that is not always possible to predict comfort from objective
105 methods only (de Looze et al., 2003; Mehta & Tewari, 2000). Nonetheless, and even though
106 comfort is a subjective phenomenon (de Looze et al., 2003), users' perceptions are often left in the
107 background. Only recently, researchers have become more aware of the positive outcomes that
108 could be achieved by involving final users in the evaluation of comfort (Blüthner et al., 2008).

109 The role played by some anthropometric characteristics, such as stature, body mass and Body Mass
110 Index (BMI), of the users of different vehicles in affecting WBV exposure and MSDs development
111 has been investigated in previous studies but contrasting results are reported (Blood et al., 2010;
112 Costa & Azeres, 2009; Mani et al., 2011; Milosavljevic et al., 2011, 2012; Sadeghi et al., 2012).
113 Among these characteristics, the BMI is used by the World Health Organization to classify
114 underweight, overweight and obesity in adults (WHO, 2000). Thus, it is a relevant index to be
115 considered, because of the increasing rate of overweight and obesity conditions in the developed
116 countries (WHO, 2000, 2004). Moreover, as an index calculated as the body mass in kilograms
117 divided by the square of the stature in meters (kg/m^2), it is a combination of measurements. It is
118 therefore essential for the interpretation of measurements, since, as reported by WHO (1995), body
119 mass alone has no meaning unless it is related to an individual's stature. However, the relation
120 between BMI and exposure to vibration is controversial: some studies pointed out that MSDs
121 related to WBV exposure increase when the BMI raises (Bovenzi et al., 2006). On the opposite,
122 results from other studies showed that vibrational discomfort decreases (Leino et al., 2006) and
123 energy absorption increases (Wang et al., 2006) when the BMI raises.
124 Little is known, however, about the influence of this anthropometric characteristic on the perception
125 of comfort in field machinery operators, whose population is undergoing the same trend of
126 increasing overweight and obesity conditions as the general population (WHO, 2004).

127 1.2 Aims of the study

128 The objective of the present study was to investigate whether an active cab suspension system fitted
129 on a telehandler was effective in reducing WBV and in improving comfort for the operators. The
130 study adopted an ergonomic approach “*concerned with the understanding of the interactions among*
131 *humans and other elements of a system [...]*”, which considers users' involvement essential “*in*
132 *order to optimize human well-being and overall system performance*” (International Ergonomics
133 Association, 2015; see also Karwowski, 2006). The importance of this approach is highlighted also

134 by the European Directive 42/2006 (European Commission, 2006), which states that “*Under the*
135 *intended conditions of use, the discomfort, fatigue and physical and psychological stress faced by*
136 *the operator must be reduced to the minimum possible, taking into account ergonomic principles*
137 *such as: allowing for the variability of the operator's physical dimensions, strength and stamina;*
138 *providing enough space for movements of the parts of the operator's body; avoiding a machine-*
139 *determined work rate; avoiding monitoring that requires lengthy concentration; adapting the*
140 *man/machinery interface to the foreseeable characteristics of the operators.*” (Annex 1, p.21).

141 Thus, the study was addressed to assess not only the objective effects of the suspension system on
142 vibration transmissibility but also the benefits perceived by the users, considered in their
143 anthropometric variability.

144 To characterize the effects of the cab suspension system fitted on the telehandler the following
145 aspects of the human-machine interaction were analyzed: 1) objective measures of vibration
146 transmissibility, 2) subjective ratings of general comfort and local body discomfort, and 3)
147 anthropometric characteristics of the users.

148 This study brings an additional contribution to the existing literature about WBV reduction and
149 comfort improvement. First of all, the study investigates WBV exposure and vibrational comfort on
150 an understudied type of field vehicle, the telescopic handler. Moreover, the vehicle was equipped
151 with an active hydro-pneumatic suspension system. Additionally, the present research includes a
152 subjective assessment of vibrational comfort and, finally, relations between objective measures,
153 subjective evaluation and anthropometrics characteristics of the users are analyzed.

154 **2. MATERIALS AND METHODS**

155 *2.1 Participants*


156 Sixteen male healthy professional telehandler drivers took part in the study. Individuals with a
157 minimum of 5 years of driving experience on telehandlers (driving-experience cut-off as in Kumar
158 et al., 2001) were chosen to participate in the study. The mean age and experience operating

159 telehandlers were 39.4 years (SD=12.2; range 18-60) and 20.0 years (SD=14.49; range 10-50),
160 respectively. The participants completed a brief questionnaire about their work experience and
161 musculoskeletal disorders history. All the participants did not report any musculoskeletal disorders
162 and were suitable for the investigation trials. All the participants signed an informed consent to
163 participate in the study.

164 *2.2 The telehandler*

165 The telescopic handler is a field vehicle equipped with a longitudinal telescopic and elevating arm,
166 usually activated by hydraulic jacks, to orientate the load carrier (ISO 12934:2013; ISO 5053:1987).
167 An example of the vehicle is shown in Figure 1. Because of their versatility, telehandlers are widely
168 used in agriculture and construction sector (Bertani, 2014). They show high sales numbers
169 worldwide: the Association of Equipment Manufacturers (AEM) statistics estimates 30,000 units
170 sold in 2011 (Cranes & Access, 2012).

171 The telehandler used in the study was a Merlo make, P55.9CS model. It is a 2 axles, 4 wheel drive
172 vehicle equipped with 103 kW Diesel engine and hydrostatic transmission. The maximum forward
173 speed is 40 kph (25 mph). The vehicle is representative of the typical telehandler architecture
174 adopted by most of the manufacturers: the cab, with the driving station, is on the left and the engine
175 on the right of the vehicle median plane. The telescopic boom, in 3 sections for a maximum length
176 of 9 m, is on the median plane of vehicle. The maximum loading mass of the telescopic boom is
177 5500 kg. The telehandler was equipped with hydro-pneumatic active cab suspension system
178 designed to reduce vibration magnitude along the vertical direction, from the buttock to the head (z-
179 axis) of the driver. The cab is joined to the chassis of the vehicle by front and rear mechanical
180 articulated connections. They make possible the cab to displace 120 mm vertically under the force
181 of the active dumper, placed between the chassis and the floor of the cab. The system is covered by
182 Merlo patent.

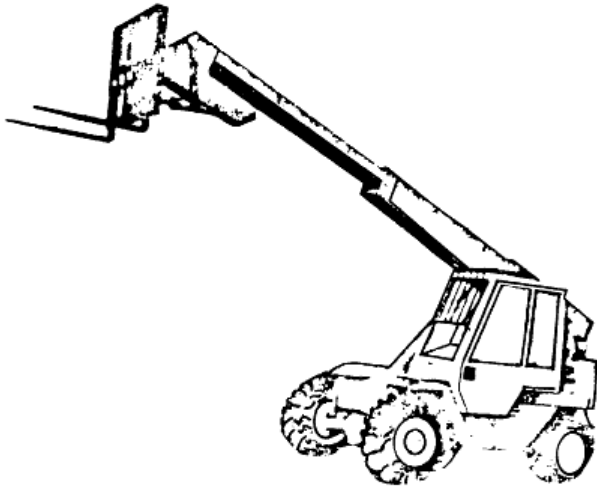

183

184 Figure 1. Example of telehandler (from ISO 5053:1987).

185 *2.3 Whole-Body Vibration*

186 Vibration level was measured using three ICP accelerometers mounted respectively on the driver's
187 seat, on the floor of the cabin close to the base of the seat, and on the chassis of the telehandler. The
188 accelerometer on the seat was a set pad. The vibration levels were measured along the three
189 orthogonal directions (x, y and z) according to the coordinate system for a seated person (ISO 2631-
190 1:1997). However, since the vertical vibrations are usually dominant in vehicles (Basri & Griffin,
191 2013), they significantly contribute to vibration magnitude exposure of the driver (Cann, Salmoni &
192 Eger, 2004), and the active suspended cab system has been designed to operate along this direction,
193 only the vertical direction (z axis) was considered for the purposes of the present paper.

194 The signal from the three accelerometers was stored on the laptop using a National Instruments data
195 acquisition card (NI9234). Later on the data were processed using a LabView software (National
196 Instruments, 2012).

197 *2.4 Subjective ratings*

198 Subjective measures were collected by means of a questionnaire, developed considering the
199 instrument by Bovenzi et al. (2006) and the scales typically used in the subjective measurements of
200 comfort (for a review, de Looze et al., 2003; Mehta & Tewari, 2000). The questionnaire submitted

to the participants was composed of 3 items, to assess their perception of comfort, the possible body discomfort, and the jolts perceived while driving. First, the participants were asked to rate the comfort perceived regarding vibrations during each trial on a 11-point rating scale, ranging from 0 (no comfort at all) to 10 (extreme comfort). Then, they were asked to identify body areas experiencing little/moderate/hard/very hard discomfort during the trial on a body map (Corlett & Bishop, 1976). Finally, the participants were asked to indicate how often (never, sometimes, often), they perceived, while driving the telehandler, so hard jolts to lose contact with the seat.

2.5 Anthropometric parameters

Stature and body mass were measured for each of the participants in the study, in accordance with ISO 7250-1 (2012) guidelines regarding variable descriptions, instruments and measurement conditions. These parameters were then used to calculate each participant’s BMI. The anthropometric characteristics of the participants in the study are reported in Table 1. The sample was a good representation of the anthropometric variability of the Italian population (ISO 7250-2, 2010; Masali, 2013), with participants from both the 5-10th and the 90-95th percentiles (some participants were even above the 99th percentile with regard to body mass).

Table 1. Anthropometric characteristics of the 16 participants.

	Mean	SD	Range
Body mass (kg)	88.6	18.5	64-129
Stature (mm)	1751	72	1600-1860
Body Mass Index (kg/m ²)	28.9	5.8	22-42

2.6 Testing procedure

Objective measurements were carried out while the telehandler was driven over a 100 m ISO smooth track (ISO 5008:2002). Previous studies confirmed that the use of ISO-5008 track provides

221 a reasonable basis for comparison of the WBV to which the operator of a field wheeled-vehicle is
222 exposed, due to the high repeatability of vibration data (Cavallo et al., 2005; Deboli et al., 2012;
223 Scarlett et al., 2005; Zehsaz et al., 2011).

224 Each of the participants drove the telehandler on the ISO-smooth track in 4 different conditions:

- 225 1. Trial 1 (Low, OFF): speed of 5 kph, deactivated suspension
- 226 2. Trial 2 (Low, ON): speed of 5 kph, activated suspension
- 227 3. Trial 3 (High, OFF): speed of 12 kph, deactivated suspension
- 228 4. Trial 4 (High, ON): speed of 12 kph, activated suspension

229 Participants were not informed that the telehandler cab was equipped with a suspension system to
230 avoid any influence on their subjective ratings. Before the trials, each participant performed a
231 training trial during which he had the possibility to adjust the seat, so, in any of the test conditions,
232 the seat suspension travel was set with vertical adjustments for custom comfort. The fore/aft
233 adjustment of the seat was set to fit the most comfort posture for each participant. After each trial a
234 research assistant administered the questionnaire.

235 *2.7 Data processing*

236 Vibration data were processed to obtain root-mean-square (rms) accelerations in m/s^2 and the
237 frequency spectra in one-third octave band ranging from 0.5 to 80 Hz. This range is indeed
238 interesting from a hygienist's point of view as reported in the ISO standard 2631-1 (1997). The
239 signals were therefore weighted using the weighting curve W_k for the z axis as described in the
240 same standard. These aspects are developed in detail in a dedicated paper while the present paper
241 focuses on vibration transmissibility (ISO 10326-1:1992).

242 Vibration transmissibility was evaluated by computing the floor/chassis and the seat/chassis
243 indexes. The indexes were calculated following the method used for the SEAT (Seat Effective
244 Amplitude Transmissibility) factor, as stated by the EN 13490 (2001) and ISO 7096 (2000)
245 standards. The floor/chassis index accounted for the effects of the cab suspension system, whereas

the seat/chassis index accounted for the joint effects of seat and cab suspension systems. The indexes were calculated by a 2 steps process. The first step was the calculation of the floor/chassis and seat/chassis rms ratios for each participant, at each of the third octave frequency bands taken into consideration, and in any of the 4 testing conditions. Then, in the second step, the ratios in the frequency range 2-8 Hz were summed up for any of the participants in each of the testing conditions. In the 2-8 Hz range the human vibration sensitivity is the highest (Griffin, 1990).

2.8 Statistical analyses

Descriptive statistics were computed for the vibration indexes, the comfort ratings, the body discomfort areas and perceived jolts.

Then, Pearson correlations were calculated, to investigate the associations between vibration indexes and between vibration indexes and comfort ratings, within each trial and across the trials. Finally, to test for differences in vibration indexes and comfort ratings with activated and deactivated system at each forward speed, a series of repeated measures Analysis of Covariance (ANCOVA) were carried out on each variable, at low and high forward speed, while controlling for the BMI of the participants. Vibration indexes and the comfort ratings were within-subject factors and the BMI was a covariate.

Prior to analysis, diagnostic and normality tests were conducted. Scatter plots and histograms were generated and Shapiro-Wilk tests performed for the vibration indexes and the comfort ratings. Floor/chassis indexes at 5 kph and 12 kph with deactivated system, and comfort ratings at 5 kph with activated and deactivated system showed a negative skew. Transformations were unsuccessful in achieving normality for floor/chassis indexes at 12 kph with deactivated system and comfort ratings at 5kph with deactivated system. However, adopting the same approach as reported by Govindu and Reeves (2014) and since the analyses used for the study are known to be robust with regard to normality assumptions (Howell, 2010), the data were used in their raw format. Statistical analyses were performed using Statistical Package for Social Science 21 (SPSS software).

3. RESULTS

Table 2 reports descriptive statistics of the seat/chassis and floor/chassis vibration indexes and comfort ratings with activated and deactivated suspension system at the two speeds. As can be seen, when the suspension system was activated, vibration transmissibility decreases, in particular when considering the floor/chassis index at high speed. Higher ratings of comfort were reported with activated system, in particular at high speed.

Table 2. Descriptive statistics of the seat/chassis and floor/chassis vibration indexes and comfort ratings in the four trials.


Parameter	Cab suspension system	N	Speed					
			Low(5kph)			High(12kph)		
			Mean	SD	Range	Mean	SD	Range
Seat/chassis index (m/s ²)	OFF	16	5.32	1.05	3.92-7.54	5.55	.75	4.26-6.95
	ON	16	4.57	.82	3.66-6.50	3.85	.81	2.76-5.72
Floor/chassis index (m/s ²)	OFF	16	6.81	.14	6.41-6.96	7.29	.30	6.60-7.55
	ON	16	5.47	.38	4.53-5.96	4.05	.14	3.83-4.28
Comfort rating	OFF	16	7.13	1.93	3-9	5.19	2.37	1-10
	ON	16	7.81	2.04	3-10	7.44	1.99	4-10

Considering then the data coming from the body map, 5 participants reported body discomfort after the trials with deactivated system (Trials 1 and 3) and 4 after the trials with activated system (Trials 2 and 4). Discomfort was reported mainly arising along the lumbar and neck/shoulders regions (see Figure 2) and it was particularly reported for Trial 3. This was the condition with high forward speed and deactivated suspension. A qualitative analysis of Figure 2 shows that, at low speed, there was a slight difference in reported discomfort with activated and deactivated system (Trials 1 and

288 2), whereas some more consistent differences can be observed at high speed (Trials 3 and 4). In
 289 particular at high-speed with activated system (Trial 4) there was not any discomfort reported for
 290 knees and ankles. Similarly, in the same trial, discomfort at neck/shoulders and lumbar area
 291 decreases.

292 Overall, when the cab suspension system was activated, there was a slightly reduced number of
 293 participants complaining about body discomfort (from 5 to 4 participants) and a reduced intensity of
 294 reported discomfort (from moderate to little), with some exceptions in the lumbar area (two
 295 participants still reported little or moderate discomfort with activated system).

296

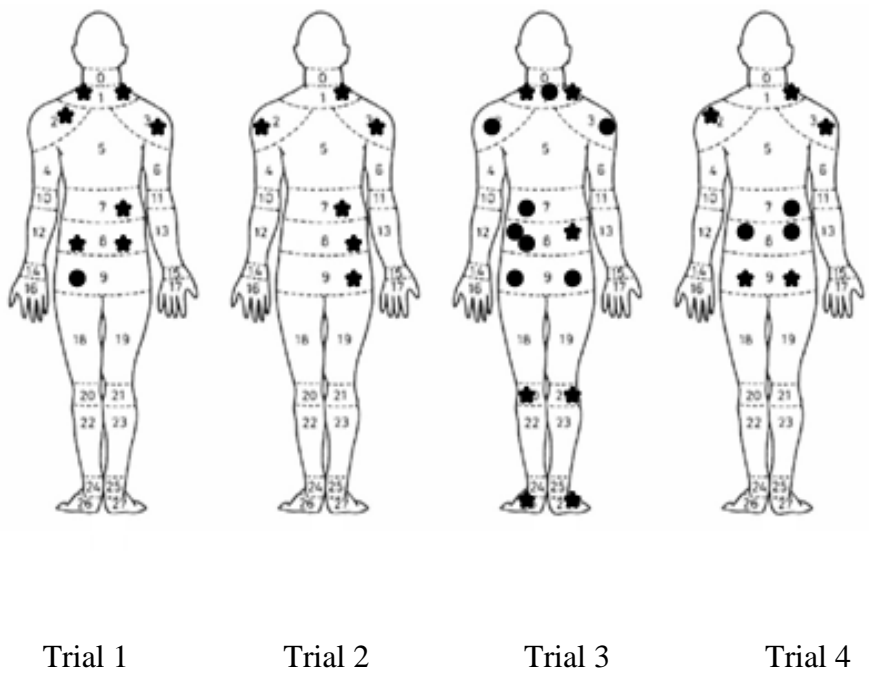

297 Fig. 2. Body maps (Corlett & Bishop, 1976) with levels of discomfort reported by the participants
 298 for different body parts during the four trials (star=little discomfort; small circle=moderate
 299 discomfort).

300 Concerning hard jolts while driving, all the participants reported no jolting during low speed trials
 301 (Trial 1 and 2). In Trial 3, 7 out of the 16 participants reported having experienced some hard jolts
 302 while driving, whereas 9 participants reported no jolts. In Trial 4, 3 participants reported some jolts
 303 while 13 reported no jolts.

304 Pearson's r correlation coefficients were calculated between WBV measurements, comfort ratings
305 and the BMI for each of the 4 trials. The analysis showed significant correlations between the BMI
306 and the comfort ratings in Trials 1, 2 and 4. Overall, objective indexes and comfort ratings
307 significantly correlated with themselves across the testing conditions. No significant correlations
308 were found either between vibration transmissibility indexes or between comfort ratings and
309 objective measures (see Table 3).

311 Table 3. Pearson’s correlations between vibration indexes, comfort ratings, and BMI in the four trials.

	BMI	Seat/chassis Low,OFF	Seat/chassis Low,ON	Seat/chassis High,OFF	Seat/chassis High,ON	Floor/chassis Low,OFF	Floor/chassis Low,ON	Floor/chassis High,OFF	Floor/chassis High,ON	Comfort, Low,OFF	Comfort Low,ON	Comfort, High,OFF	Comfort, High,ON
BMI	-	-,309	,035	-,227	-,126	,097	-,303	,010	,296	,552*	,603*	,261	,720**
Seat/chassis Low,OFF		-	,708**	,748**	,538*	,258	,388	,111	-,399	,006	-,076	,084	,140
Seat/chassis Low,ON			-	,556*	,168	,271	,440	,263	-,223	,171	,183	-,002	,388
Seat/chassis High,OFF				-	,621*	,435	,459	,448	-,101	-,139	-,154	-,019	,151
Seat/chassis High,ON					-	,347	,215	,191	-,209	-,388	-,454	,064	-,035
Floor/chassis Low,OFF						-	,738**	,870**	,364	,156	,255	,065	,083
Floor/chassis Low,ON							-	,801**	,238	-,058	-,009	-,319	-,094
Floor/chassis High,OFF								-	,480	,144	,255	-,058	,117
Floor/chassis High,ON									-	,074	,291	-,175	,003
Comfort, Low,OFF										-	,922**	,490	,729**
Comfort Low,ON											-	,435	,724**
Comfort, High,OFF												-	,459
Comfort, High,ON													-

312 Note. * $p < .05$; ** $p < .01$.

At low forward speed, the ANCOVA showed a significant main effect of the Trial on the seat/chassis index ($F_{(1,14)}=7.95$; $p=.014$; $\eta^2=.362$), with a lower transmissibility with activated system ($EMM=4.57$, $ESD=0.21$), as compared to deactivated system ($EMM=5.32$, $ESD=0.26$). The BMI reported a main effect on the comfort rating ($F_{(1,14)}=7.48$; $p=.016$; $\eta^2=.348$), with an increased perception of comfort at higher levels of BMI, with both deactivated and activated suspension system ($\beta=.185$, $t(14)=2.48$, $p=.027$ and $\beta=.214$, $t(14)=2.83$, $p=.013$, respectively). No significant interaction effects between Trial and the BMI on any of the objective indexes (seat/chassis: $F_{(1,14)}=4.05$; $p=.064$; floor/chassis: $F_{(1,14)}=3.28$; $p=.091$) and comfort ratings ($F_{(1,14)}=0.64$; $p=.436$) were found.

At high forward speed, the ANCOVA showed a significant main effect of the Trial on the seat/chassis index ($F_{(1,14)}=4.85$; $p=.045$; $\eta^2=.257$) and on the floor/chassis index ($F_{(1,14)}=93.23$; $p=.000$; $\eta^2=.869$). The transmissibility for the seat/chassis index was lower with activated system ($EMM=3.85$, $ESD=0.21$) than with deactivated system ($EMM=5.56$, $ESD=0.19$). Similarly, the transmissibility for the floor/chassis index ($EMM=4.05$, $ESD=0.03$) was lower compared to deactivated system ($EMM=7.29$, $ESD=0.08$). The BMI showed a main effect on the comfort rating ($F_{(1,14)}=6.09$; $p=.027$; $\eta^2=.303$), with an increased perception of comfort at higher levels of the covariate, when the suspension system was activated ($\beta=.250$, $t(14)=3.88$, $p=.002$). No significant interaction effects between Trial and the BMI on any of the objective indexes (seat/chassis: $F_{(1,14)}=0.14$; $p=.717$; floor/chassis: $F_{(1,14)}=0.29$; $p=.600$) and comfort ratings ($F_{(1,14)}=2.04$; $p=.175$) were found.

4. DISCUSSION

The aim of the study was to investigate the effects of an active cab suspension system fitted on a telehandler on WBV and operators' comfort, accounting for their anthropometric variability. Adopting an ergonomic approach, both the vehicle and the operator were taken into account, considering both objective and subjective parameters.

339 From a mechanical point of view, the activation of the cab suspension system proved to be effective
340 in reducing the vibration transmissibility to the driver. At both low (5 kph) and high (12 kph)
341 forward speed the activation of the system reduced the vibration transmissibility from the chassis to
342 the seat. Moreover, at high speed, it led to a significant reduction of vibration transmissibility also
343 at the floor/chassis level. Thus, the system was effective *per se*, independently from the effect of
344 the seat suspension. Considering urgent safety issues related to WBV in field machinery (Mayton et
345 al., 2008), this result stresses the importance of adopting such systems and encourages further
346 studies in the area.

347 As concerns the subjective assessment, results showed that the activation of the suspension system
348 did not affect the perception of comfort by the participants, whereas the Body Mass Index had a
349 significant effect on the increase of comfort ratings at both low and high speed. The positive effect
350 of BMI on comfort improvement is consistent with previous evidences reporting a decreased
351 vibrational exposure for people with higher BMI (Mani et al., 2011; Leino et al., 2006). This is an
352 important result if we consider that people with BMI values of overweight and over actually
353 represent the major part of agricultural and also earth-moving operators (WHO, 2000, 2004).
354 However, the analysis did not show any interaction effect between the trial and the BMI, suggesting
355 that the activation of the suspension system did not play any role in enhancing the effects of the
356 higher BMI in improving the comfort perceived by the operators. The ongoing changes in
357 agricultural population (more women, elderly and migrant workers) may ask for deeper
358 investigation of the relation between objective, subjective and anthropometric parameters, by
359 involving participants representing the lower ends of the BMI variability (underweight and normal
360 weight conditions). In this way, more data will be available to design suspension systems that can
361 be effective in reducing WBV and promoting comfort for these specific categories of users, in
362 accordance with the ergonomic perspective of the universal design (Kroemer, 2005).

363 Although there was a small number of observations about perceived jolts, the analysis of jolting
364 indicated that, at high speed, the activation of the suspension system did not wholly eliminate

365 perceived jolting. This issue should be further investigated in larger samples, since jarring and
366 jolting exposure is an important risk for musculoskeletal symptoms among farm workers (Mayton
367 et al., 2008).

368 Data about body discomfort suggested that some complaints remained, even when the cab
369 suspension system was activated, in the neck/shoulder area and lumbar area. This is an interesting
370 result if we consider that avoiding operator discomfort is as important as improving the efficiency
371 and the performances of the machinery (Cavallo et al. 2014a; Krause & Bronkhorst, 2003) and it
372 should be examined more in depth by adopting the technique applied by Yoshimura et al. (2005) in
373 their laboratory experiment about bio-dynamic responses to vertical vibration.

374 The study did not show any correlations between vibration indexes and subjective ratings of
375 comfort confirming the result from previous studies on vibrational comfort, which reported weak or
376 no relations between these two types of data (de Looze et al., 2003; Kujit-Evers et al., 2003). In a
377 future development of the research it will be useful to measure also the vibration transmissibility of
378 the human body from the seat surface to the spinal column and to the head, following the method
379 adopted by Yoshimura et al. (2005), to better comprehend and examine these issues. Moreover,
380 other factors are reported in the literature as having an influence on the perception of vibration and
381 comfort: for example, some behaviors and postures (Demić et al., 2002) can play an important role
382 in reducing vibration magnitude. Thus, this issue should be further investigated by increasing the
383 range of individual variables considered.

384 Beyond its strengths, some limitations of the present study should be taken into account. The
385 participants in the study were limited to 16 individuals, due to practical difficulties in gathering
386 people from field machinery population in an experimental setting. Indeed, they are spread across
387 the country and have different paces of work. In future research it would be useful to increase the
388 sample size to obtain more generalizable results. Given the results of this study, it would be useful
389 also to stratify the sample for underweight, overweight and obesity conditions, to better explore the
390 role played by human body in affecting technical measurements and subjective ratings. Finally, data

391 were collected on one telehandler only. When the investigation was carried out, to the knowledge of
392 the authors, Merlo was the only manufacturer having such active cab suspension system available
393 on its vehicles. Nevertheless, different models, with different characteristics, such as mass, mass
394 distribution, wheelbase, maximum dimension of the telescopic boom are available. Such different
395 vehicles may be considered in a future investigation.

396 **5. CONCLUSION**

397 WBV exposure is a well-known risk for developing MSDs and it is an important source of
398 discomfort, which can affect performance and lead to injuries. For these reasons, WBV has to be
399 constantly taken into account and monitored, by means of different preventive measures and
400 solutions (Tiemessen et al., 2007). This is particularly true for field vehicles users, given the work
401 they had to perform and the time spent on the machine (Mayton et al., 2008). The present study
402 showed that an active cab suspension system mounted on a telehandler was effective in reducing
403 vibration transmissibility but it did not affect the perception of comfort in a group of professional
404 users.

405 An ergonomic approach was adopted in the study to highlight consistencies and discrepancies
406 between different sources of data about WBV exposure and comfort, coming from both the vehicle
407 and the users. Anthropometric characteristics of the users have been considered to investigate which
408 range of physical variability was better protected by the suspension system. At both low and high
409 speed, individuals with higher BMI reported higher comfort levels, but this was not affected by the
410 activation of the cab suspension. In addition, the cab suspension system did not eliminate
411 discomfort: some neck/shoulder and lumbar complaints seems to remain.

412 The results of the study are not conclusive and further investigations are needed to improve
413 vibrational comfort in telehandler users. However, the present study suggests that the operators,
414 given their wide range of physical variability, may need more adjustable or customizable WBV
415 reduction systems: this may be particularly relevant for those users who have characteristics near to
416 the extreme end of the variability (e.g. aged people, women or migrant workers), whose presence is

417 increasing among the workforce population of the developed countries (de Haan & Rogaly, 2002;
418 De Schutter, 2013; Ilmarinen, 2006).

419

420 **References**

421 Basri, B., Griffin, M.J., 2013. Predicting discomfort from whole-body vertical vibration when
422 sitting with an inclined backrest. *Appl. Ergon.* 44 (3), 423-434.

423 <http://dx.doi.org/10.1016/j.apergo.2012.10.006>

424 Bertani, M., 2014. Motion-Control-Lösungen für Telehandler. *ATZoffhighway*, 7 (1), 64-69.

425 Blood, R.P., Ploger, J.D., Johnson, P.W., 2010. Whole body vibration exposures in forklift
426 operators: comparison of a mechanical and air suspension seat. *Ergonomics* 53 (11), 1385-1394.

427 <http://doi.org/10.1080/00140139.2010.519053>

428 Blüthner, R., Seidel, H., Hinza, B., 2008. Laboratory study as basis of the development for a seat
429 testing procedure in horizontal directions. *Int. J. Ind. Ergonom.* 38 (5-6), 447-456.

430 <http://doi.org/10.1016/j.ergon.2007.08.008>

431 Bovenzi, M., Zadini, A., 1992. Self-reported low back symptoms in urban bus drivers exposed to
432 whole-body vibration. *Spine* 17 (9), 1048-1059.

433 Bovenzi, M., Rui, F., Negro, C., D'Agostin, F., Angotzi, G., Bianchi, S., Stacchini, N., 2006. An
434 epidemiological study of low back pain in professional drivers. *J. Sound Vib.* 298 (3), 514-539.

435 <http://doi.org/10.1016/j.jsv.2006.06.001>

436 Cann, A.P., Salmoni, A.W., Eger, T.R., 2004. Predictors of whole body vibration exposure
437 experienced by highway transport truck drivers. *Ergonomics* 47 (13), 1432-1453.

438 <http://dx.doi.org/10.1080/00140130410001712618>

439 Cavallo, E., Deboli, R., Paletto, G., Preti, C., 2005. Ripetibilità dei dati di vibrazioni sui sedili di
 440 trattrici agricole tramite pista artificiale. In: Cesini, G., Iannotti, A., Mattei, E., Di Bella, A., Peretti,
 441 A. (Eds.), Atti 32° Convegno Nazionale AIA Associazione Italiana di Acustica - Ancona, 15-17
 442 Giugno 2005, 303-306. ISBN 88-88942-09-2.

443 Cavallo, E., Ferrari, E., Bollani, L., Coccia, M., 2014a. Attitudes and behavior of adopters of
 444 technological innovations in agricultural tractors: a case study in Italian agricultural system. *Agr.*
 445 *Syst.* 130, 44-54. <http://doi.org/10.1016/j.agry.2014.05.012>

446 Cavallo, E., Ferrari, E., Bollani, L., Coccia, M., 2014b. Strategic management implications for the
 447 adoption of technological innovations in agricultural tractor: the role of scale factors and
 448 environmental attitude. *Technol. Anal. Strateg.* 26 (7), 765-779.
 449 <http://doi.org/10.1080/09537325.2014.890706>

450 Cavallo, E., Ferrari, E., Coccia, M., 2015. Likely technological trajectories in agricultural tractors
 451 by analysing innovative attitudes of farmers. *Int. J. Technology, Policy and Management* 15 (2),
 452 158-177. <http://doi.org/10.1504/IJTPM.2015.069203>

453 Corlett, E.N., Bishop, R.P., 1976. A technique for assessing postural discomfort. *Ergonomics*, 19
 454 (2), 175-182. <http://doi.org/10.1080/00140137608931530>

455 Costa, N., Arezes, P.M., 2009. The influence of operator driving characteristics in whole-body
 456 vibration exposure from electrical fork-lift trucks. *Int. J. Ind. Ergonom.* 39 (1), 34-38.
 457 <http://doi.org/10.1016/j.ergon.2008.06.004>

458 Cranes & Access, 2012. The economic indicator. In: Crane & Access, The Vertikal Press Ltd,
 459 Brackley 14 (5), 35-49. Available on-line at
 460 http://www.vertikal.net/fileadmin/journals/ca/2012/ca_2012_5_p34-49.pdf (Accessed 04 February
 461 2015)

462 Deboli, R., Calvo, A., Preti, C., 2012. Comparison between ISO 5008 and field whole body
 463 vibration. *J. Agr. Eng.* 43 (2), 49-54. <http://doi.org/10.4081/jae.2012.e8>

464 De Haan, A., Rogaly, B., 2002. Introduction: Migrant workers and their role in rural change. *J. Dev.*
 465 *Stud.* 38 (5), 1-14. <http://doi.org/10.1080/00220380412331322481>

466 De Looze, M.P., Kuijt-Evers, L.F., Van Dieën, J.A.A.P., 2003. Sitting comfort and discomfort and
 467 the relationships with objective measures. *Ergonomics* 46 (10), 985-997.
 468 <http://doi.org/10.1080/0014013031000121977>

469 De Schutter, O., 2013. The agrarian transition and the ‘feminization’ of agriculture. *Food*
 470 *Sovereignty: A critical dialogue* - Conference Paper #37. Yale University, New Haven.

471 De Temmerman, J., Deprez, K., Hostens, I., Anthonis, J., Ramon, H., 2005. Conceptual Cab
 472 Suspension System for a Self-propelled Agricultural Machine - Part 2: Operator Comfort
 473 Optimisation. *Biosyst. Eng.* 90 (3), 271-278. <http://doi.org/10.1016/j.biosystemseng.2004.08.007>

474 Demić, M., Lukić, J., Milić, Ž., 2002. Some aspects of the investigation of random vibration
 475 influence on ride comfort. *J. Sound. Vib.* 253 (1), 109-128.

476 Deprez, K., Moshou, D., Anthonis, J., De Baerdemaeker, J., Ramon H., 2005. Improvement of
 477 vibrational comfort on agricultural vehicles by passive and semi-active cabin suspensions.
 478 *Computers and Electronics in Agriculture* 49 (3), 431-440.
 479 <http://doi.org/10.1016/j.compag.2005.08.009>

480 Donati, P., 2002. Survey of technical preventative measures to reduce whole-body vibration effects
 481 when designing mobile machinery. *J. Sound. Vib.* 253 (1), 169-183.
 482 <http://doi.org/10.1006/jsvi.2001.4254>

483 EN 13490, 2001. Mechanical vibration - Industrial trucks - Laboratory evaluation and specification
 484 of operator seat vibration. European Committee for Standardization, Brussels, Belgium.

485 EU OSHA, 2010. European risk observatory report. OSH in figures: Work-related musculoskeletal
 486 disorders in the EU - Facts and figures. European Agency for Safety and Health at Work,
 487 Luxembourg. Available at: [https://osha.europa.eu/en/tools-and-](https://osha.europa.eu/en/tools-and-publications/publications/reports/TERO09009ENC)
 488 [publications/publications/reports/TERO09009ENC](https://osha.europa.eu/en/tools-and-publications/publications/reports/TERO09009ENC) (Accessed 03 October 2015)

489 European Commission, 2006. Directive 2006/42/EC of the European Parliament and of the council
 490 of 17 May 2006 on machinery, and amending Directive 95/16/EC (recast), Official Journal of the
 491 European Union, L 157, 9.6.2006. Available at: [http://eur-](http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=OJ:L:2006:157:0024:0086:EN:PDF)
 492 [lex.europa.eu/LexUriServ/LexUriServ.do?uri=OJ:L:2006:157:0024:0086:EN:PDF](http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=OJ:L:2006:157:0024:0086:EN:PDF) (Accessed 03
 493 February 2015)

494 Fischer, D., Isermann, R., 2004. Mechatronic semi-active and active vehicle suspensions. Control
 495 Engineering Practice 12 (11), 1353-1367. <http://doi.org/10.1016/j.conengprac.2003.08.003>

496 Govindu, N.K., Babski-Reeves, K., 2014. Effects of personal, psychosocial and occupational factors
 497 on low back pain severity in workers. Int. J. Ind. Ergonom. 44 (2), 335-341.
 498 <http://dx.doi.org/10.1016/j.ergon.2012.11.007>

499 Griffin, M.J., 1990. Handbook of Human Vibration. Academic Press, New York, NY.

500 Hansson, P.A., 1995. Optimization of agricultural tractor cab suspension using the evolution
 501 method. Computers and Electronics in Agriculture 12, 35-49. [http://doi.org/10.1016/0168-](http://doi.org/10.1016/0168-1699(94)00036-P)
 502 [1699\(94\)00036-P](http://doi.org/10.1016/0168-1699(94)00036-P)

503 Hostens, I., Deprez, K., Ramon, H., 2004. An improved design of air suspension for seats of mobile
 504 agricultural machines. J. Sound Vib. 276 (1), 141-156. <http://doi.org/10.1016/j.jsv.2003.07.018>

505 Howell, D.C., 2010. Statistical methods for psychology, seventh ed. Thomson Wadsworth,
 506 Belmont, CA.

507 Ikenaga, S., Lewis, F.L., Campos, J., Davis, L., 2000. Active suspension control of ground vehicle
 508 based on a full-vehicle model. In: American Control Conference, 2000. Proceedings of the 2000,
 509 vol. 6, 4019-4024. American Automatic Control Council, Chicago, IL.
 510 <http://doi.org/10.1109/ACC.2000.876977>

511 Ilmarinen, J., 2006. Towards a longer working life: Aging and the quality of worklife in the
 512 European Union. Finnish Institute of Occupational Health, Helsinki.

513 International Ergonomics Association, 2015. <http://www.iea.cc/> (Accessed 30 January 2015)

514 ISO 5053, 1987. Powered industrial trucks - Terminology. International Organization for
 515 Standardization, Geneva, Switzerland.

516 ISO 10326-1, 1992. Mechanical vibration - Laboratory method for evaluating vehicle seat vibration
 517 - Part 1: Basic requirements. International Organization for Standardization, Geneva, Switzerland.

518 ISO 2631-1, 1997. Mechanical vibration and shock - Evaluation of human exposure to whole-body
 519 vibration - Part 1: General requirements. International Organization for Standardization, Geneva,
 520 Switzerland.

521 ISO 7096, 2000. Earth-moving machinery - Laboratory evaluation of operator seat vibration.
 522 International Organization for Standardization, Geneva, Switzerland.

523 ISO 5008, 2002. Agricultural wheeled tractors and field machinery - Measurement of whole-body
 524 vibration of the operator. International Organization for Standardization, Geneva, Switzerland.

525 ISO 7250-2, 2010. Basic human body measurements for technological design. Part 2: Statistical
 526 summaries of body measurements from individual ISO populations. International Organization for
 527 Standardization, Geneva, Switzerland.

528 ISO 7250-1, 2012. Basic human body measurements for technological design - Part 1: Body
529 measurement definitions and landmarks. International Organization for Standardization, Geneva,
530 Switzerland.

531 ISO 12934, 2013. Tractors and machinery for agriculture and forestry – Basic types – Vocabulary.
532 International Organization for Standardization, Geneva, Switzerland.

533 Kandel, W., 2008. Profile of Hired Farmworkers: A 2008 Update. Economic Research Report, 60.
534 Economic Research Service, U.S. Department of Agriculture, Washington, D.C.

535 Karwowski, W., 2006. International Encyclopedia of Ergonomics and Human Factors, second ed.
536 CRC Press, Boca Raton, FL.

537 Kittusamy, N.K., Buchholz, B., 2004. Whole-body vibration and postural stress among operators of
538 construction equipment: A literature review. J. Safety Res. 35(3), 255-261.
539 <http://doi.org/10.1016/j.jsr.2004.03.014>

540 Krause, F., Bronkhorst, R. E., 2003. Comfortable Earth-Moving Machinery: Knowledge and
541 Experiences from the Eurocabin Project. TNO Work and Employment, Hoofddorp.

542 Kroemer, K.H., 2005. “Extra-Ordinary” Ergonomics: How to Accommodate Small and Big
543 Persons, The Disabled and Elderly, Expectant Mothers, and Children, vol. 4. CRC Press, Boca
544 Raton, FL.

545 Kuijt-Evers, L.F.M., Krause, F., Vink, P., 2003. Aspects to improve cabin comfort of wheel loaders
546 and excavators according to operators. Appl. Ergon. 34 (3), 265-271. [http://doi.org/10.1016/S0003-](http://doi.org/10.1016/S0003-6870(03)00032-2)
547 [6870\(03\)00032-2](http://doi.org/10.1016/S0003-6870(03)00032-2)

548 Kumar, A., Mahajan, P., Mohan, D., Varghese, M., 2001. IT - Information Technology and the
549 Human Interface: Tractor Vibration Severity and Driver Health: a Study from Rural India. J. Agr.
550 Eng. Res. 80 (4), 313-328. <http://doi.org/10.1006/jaer.2001.0755>

551 Leino, S.P., Marjanen, Y., Launis, S., 2006. Human comfort and motion under simulated vibration
 552 exposure of mobile machinery. In: Eberhardsteiner, J., Mang, H.A., Waubke, H. (Eds.), Proceedings
 553 of 13th International Congress on Sound and Vibration, Vienna, Austria.

554 Lemerle, P., Boulanger, P., Poirot, R., 2002. A simplified method to design suspended cabs for
 555 counterbalance trucks. *J. Sound Vib.* 253 (1), 283-293. <http://doi.org/10.1006/jsvi.2001.4260>

556 Lin, C., 2011. Ergonomic Assessment of Excavator Seat. *Int. J. Appl. Sc. Eng.* 9 (2), 99-109.

557 Lines, J. A., Stiles, M., Whyte, R.T., 1995. Whole Body Vibration During Tractor Driving. *J. Low*
 558 *Freq. Noise Vib.* 14 (2), 87-104.

559 Lyons, J., 2002. Factors contributing to low back pain among professional drivers: a review of
 560 current literature and possible ergonomic controls. *Work*, 19 (1), 95-102.

561 Mani, R., Milosavljevic, S., Sullivan, S.J., 2011. The influence of body mass on whole-body
 562 vibration: a quad-bike field study. *The Ergonomics Open Journal* 4, 1-9.
 563 <http://doi.org/10.2174/1875934301104010001>

564 Mansfield, N.J., Newell, G.S., Notini, L., 2009. Earth Moving Machine Whole-body Vibration and
 565 the Contribution of Sub-1Hz Components to ISO 2631-1 Metrics. *Ind. Health* 47 (4), 402-410.
 566 <http://doi.org/10.2486/indhealth.47.402>

567 Masali, M., 2013. *L'Italia si Misura*, vol. 2. Aracne Editrice, Roma.

568 Mayton, A.G., Kittusamy, N.K., Ambrose, D.H., Jobes, C.C., Legault, M.L., 2008. Jarring/jolting
 569 exposure and musculoskeletal symptoms among farm equipment operators. *Int. J. Ind. Ergonom.* 38
 570 (9) 758-766. <http://doi.org/10.1016/j.ergon.2007.10.011>

571 Mehta, C.R., Tewari, V.K., 2000. Seating discomfort for tractor operators—a critical review. *Int. J.*
 572 *Ind. Ergonom.* 25 (6), 661-674. [http://doi.org/10.1016/S0169-8141\(99\)00054-2](http://doi.org/10.1016/S0169-8141(99)00054-2)

573 Milosavljevic, S., McBride, D. I., Bagheri, N., Vasiljev, R.M., Mani, R., Carman, A.B., Rehn, B.,
 574 2011. Exposure to whole-body vibration and mechanical shock: a field study of quad bike use in
 575 agriculture. *Ann. Occup. Hyg.* 55 (3), 286-295. <http://doi.org/10.1093/annhyg/meq087>
 576 Milosavljevic, S., Mani, R., Ribeiro, D.C., Vasiljev, R., Rehn, B., 2012. Exploring how
 577 anthropometric, vehicle and workplace factors influence whole-body vibration exposures during on-
 578 farm use of a quad bike. *Int. J. Ind. Ergonom.* 42 (4), 392-396.
 579 <http://doi.org/10.1016/j.ergon.2012.04.004>
 580 National Instruments, 2012. LabVIEW System Design Software. Available at:
 581 <http://www.ni.com/labview/> (Accessed 03 February 2015)
 582 Osborne, A., Blake, C., Fullen, B.M., Meredith, D., Phelan, J., McNamara, J., Cunningham, C.,
 583 2012. Risk factors for musculoskeletal disorders among farm owners and farm workers: A
 584 systematic review. *Am. J. Ind. Med.* 55 (4), 376-389. <http://doi.org/10.1002/ajim.22001>
 585 Paschold, H.W., Sergeev, A.V., 2009. Whole-body vibration knowledge survey of U.S.
 586 occupational safety and health professionals. *J. Safety Res.* 40 (3), 171-176.
 587 <http://doi.org/10.1016/j.jsr.2009.02.008>
 588 Pope, M.H., Wilder, D.G., Magnusson, M., 1998. Possible mechanisms of low back pain due to
 589 whole-body vibration. *J. Sound Vib.* 215 (4), 687-697. <http://doi.org/10.1006/jsvi.1998.1698>
 590 Sadeghi, N., Habibi, E., Sajjadi, S., 2012. The relationships between musculoskeletal disorders and
 591 anthropometric indices in public vehicle drivers. *Int. J. of Collaborative Research on Internal*
 592 *Medicine & Public Health* 4 (6), 1173-1184.
 593 Scarlett, A.J., Price, J.S., Semple, D.A., Stayner R.M., 2005. Whole-body vibration on agricultural
 594 vehicles: evaluation of emission and estimated exposure levels. HSE Research Report No. 321.
 595 Health and Safety Executive, Sudbury, Suffolk, UK.

596 Scarlett, A.J., Price, J.S., Stayner, R. M., 2007. Whole-body vibration: Evaluation of emission and
 597 exposure levels arising from agricultural tractors. *J. Terramech.* 44 (1) 65-73.
 598 <http://doi.org/10.1016/j.jterra.2006.01.006>

599 Strambi, F., Bartalini, M., Boy, S., Gauthy, R., Landozzi, R., Novelli, D., Stanzani, C., 2012. End
 600 users “Feedback” to improve ergonomic design of machinery. *Work* 41 (suppl. 1), 1212-1220.
 601 <http://doi.org/10.3233/WOR-2012-0305-1212>

602 Tiemessen, I.J., Hulshof, C.T., Frings-Dresen, M.H., 2007. An overview of strategies to reduce
 603 whole-body vibration exposure on drivers: A systematic review. *Int. J. Ind. Ergonom.*, 37 (3), 245-
 604 256. <http://doi.org/10.1016/j.ergon.2006.10.021>

605 Velmurugan, P., Kumaraswamidhas, L.A., Sankaranarayananasamy, K., 2012. Optimisation of whole
 606 body vibration analysis for suspended cabin tractor semitrailer. *Int. J. Veh. Noise Vib.* 8 (2), 152-
 607 165. <http://doi.org/10.1504/IJNVN.2012.046466>

608 Vink, P., 2005. *Comfort and design. Principles and good practice.* CRC Press, Boca Raton, FL.

609 Wang, W., Rakheja, S., Boileau, P.É., 2006. The role of seat geometry and posture on the
 610 mechanical energy absorption characteristics of seated occupants under vertical vibration. *Int. J.*
 611 *Ind. Ergonom.* 36 (2), 171-184. <http://doi.org/10.1016/j.ergon.2005.09.006>

612 WHO, 1995. *Physical status: The use of and interpretation of anthropometry.* Report of a WHO
 613 Expert Committee. WHO Press, Geneva, Switzerland.

614 WHO, 2000. *Obesity: preventing and managing the global epidemic.* WHO Technical Report Series
 615 No. 894. WHO Press, Geneva, Switzerland.

616 WHO, 2004. *Global Health Risks. Mortality and burden of disease attributable to selected major*
 617 *risks.* WHO Press, Geneva, Switzerland.

618 Wikström, B.O., 1993. Effects from twisted postures and whole-body vibration during driving. Int.
 619 J. Ind. Ergonom. 12 (1), 61-75. [http://doi.org/10.1016/0169-8141\(93\)90038-F](http://doi.org/10.1016/0169-8141(93)90038-F)
 620 Wong, J.Y., 2001. Theory of ground vehicles, third ed. John Wiley & Sons, New York, NY.
 621 Yoshimura, T., Nakai, K., Tamaoki, G., 2005. Multi-body dynamics modelling of seated human
 622 body under exposure to whole-body vibration. Ind. Health, 43 (3), 441-447.
 623 <http://doi.org/10.2486/indhealth.43.441>
 624 Zehsaz M., Sadeghi M.H., Ettetfagh, M.M., Shams F., 2011. Tractor cabin's passive suspension
 625 parameters optimization via experimental and numerical methods. J. Terramech. 48 (6), 439-450.
 626 <http://doi.org/10.1016/j.jterra.2011.09.005>