

AperTO - Archivio Istituzionale Open Access dell'Università di Torino

## Ground Zoning Map of the Piedmont Region (NW Italy): methodology and preliminary results

**This is a pre print version of the following article:**

*Original Citation:*

*Availability:*

This version is available <http://hdl.handle.net/2318/151954> since 2017-05-25T08:45:52Z

*Publisher:*

Springer

*Published version:*

DOI:10.1007/978-3-319-09048-1\_202

*Terms of use:*

Open Access

Anyone can freely access the full text of works made available as "Open Access". Works made available under a Creative Commons license can be used according to the terms and conditions of said license. Use of all other works requires consent of the right holder (author or publisher) if not exempted from copyright protection by the applicable law.

(Article begins on next page)



# UNIVERSITÀ DEGLI STUDI DI TORINO

***This is an author version of the contribution published on:***

*Questa è la versione dell'autore dell'opera:*

*G. Lollino et al. (eds.). Engineering Geology for Society and Territory – Volume 5*

*DOI : 10.1007/978-3-319-09048-1\_202*

*Springer International Publishing Switzerland 2015*

*p. 1065-1069*

***The definitive version is available at:***

*La versione definitiva è disponibile alla URL:*

*<http://www.springer.com/us/book/9783319090474>*

# Ground Zoning Map of the Piedmont Region (NW Italy): Methodology and Preliminary Results

Perrone Gianluigi, Gaeta Armando Riccardo, Tiranti Davide, Cadoppi Paola, Fioraso Gianfranco

G. Perrone , P. Cadoppi  
Department of Earth Sciences, University of Torino, Turin, Italy  
e-mail: gianluigi.perrone@unito.it  
A.R. Gaeta D. Tiranti  
Department of Forecasting Systems, Regional Agency for  
Environmental Protection of Piemonte, Turin, Italy  
G. Fioraso  
Institute of Geosciences and Georesources, National Research  
Council, Turin, Italy  
P. Cadoppi  
NatRisk, University of Torino, Turin, Italy

## Abstract

This paper briefly describes the methodology and preliminary results of a study aimed at the realization of a Ground Zoning Map of the Piedmont region, characterized by low-to-moderate seismic hazard. In this study, two thematic maps were produced, namely a Lithotechnical map and a Ground Zoning Map of the Piedmont region at 1:250,000 scale. In the Lithotechnical map, the geological units were grouped, on the basis of their strength properties, grain-size, density and weathering of rocks, into 24 categories qualitatively characterized by a homogeneous seismic response. In the Ground Zoning Map, the regional territory was subdivided into three main sectors characterized by homogeneous mechanical behaviour during seismic shaking. These areas were further subdivided into several zones characterized by homogenous lithostratigraphy and/or geo-structural conditions. These maps should constitute the basis for the realization of an updated  $V_{S30}$  map of the Piedmont region, which is currently lacking.

## Introduction

The Piedmont region is characterized by a low magnitude seismicity (less than 5 on the Richter scale), mainly clustered in its western sector, alongside the western Alps and in its south-eastern sector alongside the Langhe sector (Perrone et al. 2013 and references therein). In the new seismic classification of Italy (President of the Council of Ministers' Ordinance n. 3274, 20th March 2003) a large part of Piedmont falls into Zones characterized by low and very low seismic hazard. The application of the "New Technical Standards for Constructions, 14th January 2008 Ministerial Decree" imposes the earthquake-resistant designs for structures, and the characterization of ground motions for the entire regional territory. These recommendations are based, following the Eurocode 8 directives (BS EN 1998-1:2004, 2004), on the definition of the  $V_{S30}$  parameter. In this paper, the methodological approach and preliminary results of a study aimed at the realization of thematic maps for the seismic site characterization of the Piedmont region are described. These maps should constitute the basis for the realization of an updated  $V_{S30}$  map of the Piedmont region, which is currently lacking.

## Methodology

The paucity of  $V_{S30}$  measurements does not allow direct characterization of the site amplification for the entire study area. Nevertheless, the wide availability of geological maps for the whole study area (Geological Map of Italy on a scale of 1:100,000), even if outdated (most of these maps date back to the first half of the last century), induced us to adopt

a geologically-based strategy for the realization of the thematic maps described in the following. In this strategy, when  $V_{S30}$  measurements are not sufficiently abundant or unavailable, surficial geological units are assigned a constant  $V_{S30}$  value on the basis of representative values for a specific geological unit.

In order to update the information regarding this area, geological maps were integrated using GIS software, with the Italian Landslides Inventory (IFFI Project; only landslides wider than 500 m were considered) and with the Quaternary deposits mapped in the Geological Map of the Piedmont region on a scale of 1:250,000 (Piana et al. in press). A preliminary geological map on a scale of 1:250,000 in shapefile format is required as a starting material for the realization of  $V_{S30}$  maps (Wald et al. 2006), resulting from the integration of these different data. Proceeding from this map, two thematic maps, namely the "Lithotechnical Map" and the "Ground Zoning Map" were created. In the Lithotechnical Map the geological units were grouped into different categories on the basis of their strength properties, grain-size, density and weathering of rocks. Each category is considered to be qualitatively characterized by a homogeneous mechanical response to seismic shaking.

The Ground Zoning Map (1:250,000 scale) was created (Figs. 1 and 2) starting from the previous one, in which the regional territory was subdivided into different sectors characterized by homogeneous mechanical behaviour during seismic shaking. These sectors were further subdivided into several zones characterized by a homogenous lithostratigraphy. A preliminary  $V_{S30}$  value was assigned to each zone based on the Eurocode 8.  $J_v$  and GSI parameters were also assigned, on the basis of the literature, to characterize the fractured bedrock.

This map, despite having a completely different scale, was created using a procedure similar to that proposed for the first level of microzonation studies in Italy (Gruppo di lavoro MS 2008). This methodology has been chosen because, compared to the classical ones (Wills et al. 2000), allows to take into account a greater number of parameters for the characterization of seismic site response, such as: (i) the rock strength of the bedrock, (ii) the thickness of surficial deposits and (iii) the deep-seated gravitational slope deformations (DGSDs) and the fault zones, which cause a strong decrease of the rock mass quality. This allows a more accurate evaluation of the seismic site conditions. In addition, this methodology allows to immediately view, on a regional scale, the different areas qualitatively characterized by different seismic response. This second aspect can be useful both in the land use planning and in the civil protection perspective.

### **Lithotechnical and Ground Zoning Map**

In the Lithotechnical Map the geological units were grouped into 24 different categories. Two main categories were identified, namely the Quaternary surficial deposits and the pre-Quaternary bedrock. The pre-Quaternary bedrock was further subdivided into (i) metamorphic and (ii) sedimentary consolidated bedrock. The DGSDs and the regional fault zones, responsible for the decrease of the rock mass quality were also considered.

In the Ground Zoning Map (Figs. 1 and 2), the regional territory was subdivided into Stable Areas, Stable Areas possibly affected by seismic amplification and Areas susceptible to instabilities, represented in blue, green and red tonalities respectively, on the basis of the lithological characteristics, rock fracturing and thickness of the surficial deposits (Gruppo di Lavoro 2008).

In the **stable areas**, corresponding to areas where poorly fractured bedrock crops out or is covered by a thin blanket of Quaternary deposits (less than 5 m), no seismic amplification phenomena are likely.

The **stable areas possibly affected by seismic amplification phenomena** correspond to areas where strongly fractured bedrock crops out, or is overlain by surficial deposits more than 5 m thick. In these areas, amplification phenomena during earthquake shaking could occur.

The **areas susceptible to instabilities** correspond to areas where permanent deformations, like landslides, could occur.

These three categories were further subdivided into 36 different Zones, characterized by a roughly homogeneous stratigraphy for the first 30 m of depth, in which a homogeneous seismic response was expected. A stratigraphic column indicating the range of thickness of each lithotype and a qualitative estimation of its  $V_s$  value was also provided for each Zone. Moreover,  $J_v$  and GSI parameters were also qualitatively provided for the areas affected by DGSDs and/or fault zones.

In the **stable areas**, eight Zones were identified (Zones 1–8), where  $V_{s30}$  values greater than 800 m/s were expected. These Zones were mostly widespread in the Western Alps, where poorly fractured metamorphic bedrock crops out and subordinately in the Langhe, Monferrato and Turin Hill, where coarse-grained sedimentary bedrock (conglomerates, breccias, sandstones) crops out.

In the **stable areas that were likely to be affected by amplification phenomena**, 25 Zones were classified (Zone 9–33), where  $V_{s30}$  of 360–800 m/s were generally expected. These Zones, which were mostly widespread in the Po Plain, Langhe, Monferrato and Turin Hill, and subordinately in the Western Alps, include:

- areas where metamorphic bedrock, affected by DGSDs, crops out, or is overlapped by Quaternary deposits up to 30 m thick; widespread only in the Western Alps;
- fault zones;
- areas where fine-grained sedimentary bedrock (marls, clays, sands, chaotic complexes) crops out, widespread in the Langhe, Monferrato and Turin Hill;
- areas where sedimentary or metamorphic bedrock is overlapped by Quaternary deposits (loess deposits, block streams, glacial till, fluvial deposits, talus deposits) up to 30 m thick;
- areas where Quaternary deposits (fluvial and subordinately glacial and lacustrine deposits) are more than 30 m thick, mostly widespread in the Po Plain and in the main bottom valleys;
- areas where anthropic deposits, more than 30 m thick, are present.

In the **stable areas susceptible to instabilities**, three Zones were identified (Zones 34–36):

- landslide deposits, up to 30 m thick, that overlie metamorphic or sedimentary bedrock, possibly characterized by  $V_s$  values greater than 800 m/s;

- landslide deposits, up to 30 m thick, that overlap a bedrock affected by DGSDs, possibly characterized by  $V_s$  values of 360–800 m/s;
- a zone characterised by sinkholes.

## References

BS EN 1998-1:2004 (2004) Eurocode 8, Design of structures for earthquake resistance—Part 1: General rules, seismic actions and rules for buildings. CEN European committee for standardization, Bruxelles, Belgium. <http://law.resource.org/eur/ibr/en.1998.1.2004.pdf>


Gruppo di lavoro MS (2008) Indirizzi e criteri per la microzonazione sismica. Conferenza delle Regioni e delle Province autonome—Dipartimento della protezione civile, Roma, 3 vol and Dvd

Perrone G, Morelli M, Piana F, Fioraso G, Nicolò G, Mallen L, Cadoppi P, Balestro G, Tallone S (2013) Current tectonic activity and differential uplift along the Cottian Alps/Po Plain boundary (NW Italy) as derived by PS-InSAR data. *J Geodyn* 66:65–78

Piana F, Falletti P, Fioraso G, Irace A, Mosca P, D'Atri A (in press) Geological map of the Regione Piemonte, 1: 250,000 scale. CNRIGG, ARPA Piemonte

Wald DJ, Worden BC, Quitoriano V, Pankow KL (2006) ShakeMap® manual, users guide, and software guide, U.S. Geological survey, techniques and methods 12-A1. <http://pubs.usgs.gov/tm/2005/12A01/>. Accessed May 2005

Wills CJ, Petersen M, Bryant WA, Reichle M, Saucedo GJ, Tan S, Taylor G, Treiman J (2000) A site-conditions map for California based on geology and shear-wave velocity. *Bull Seismol Soc Am* 90:S187–S208

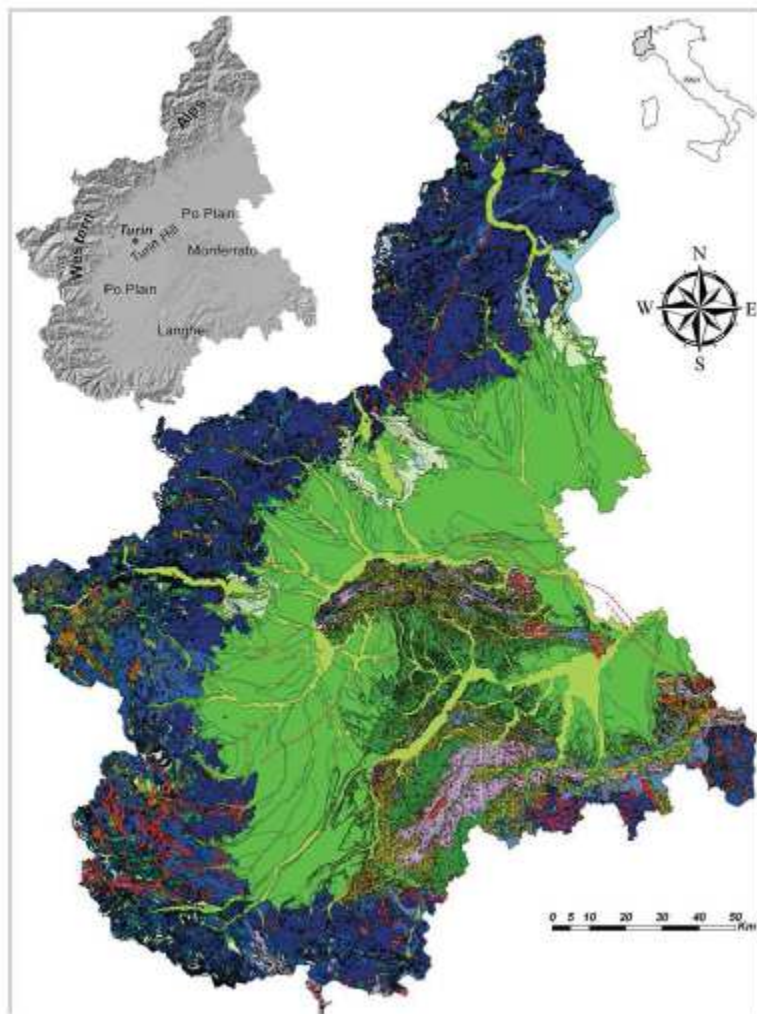

**Fig. 1** Preliminary Ground Zoning Map of the Piedmont region. The legend of this map is illustrated in the Fig. 2



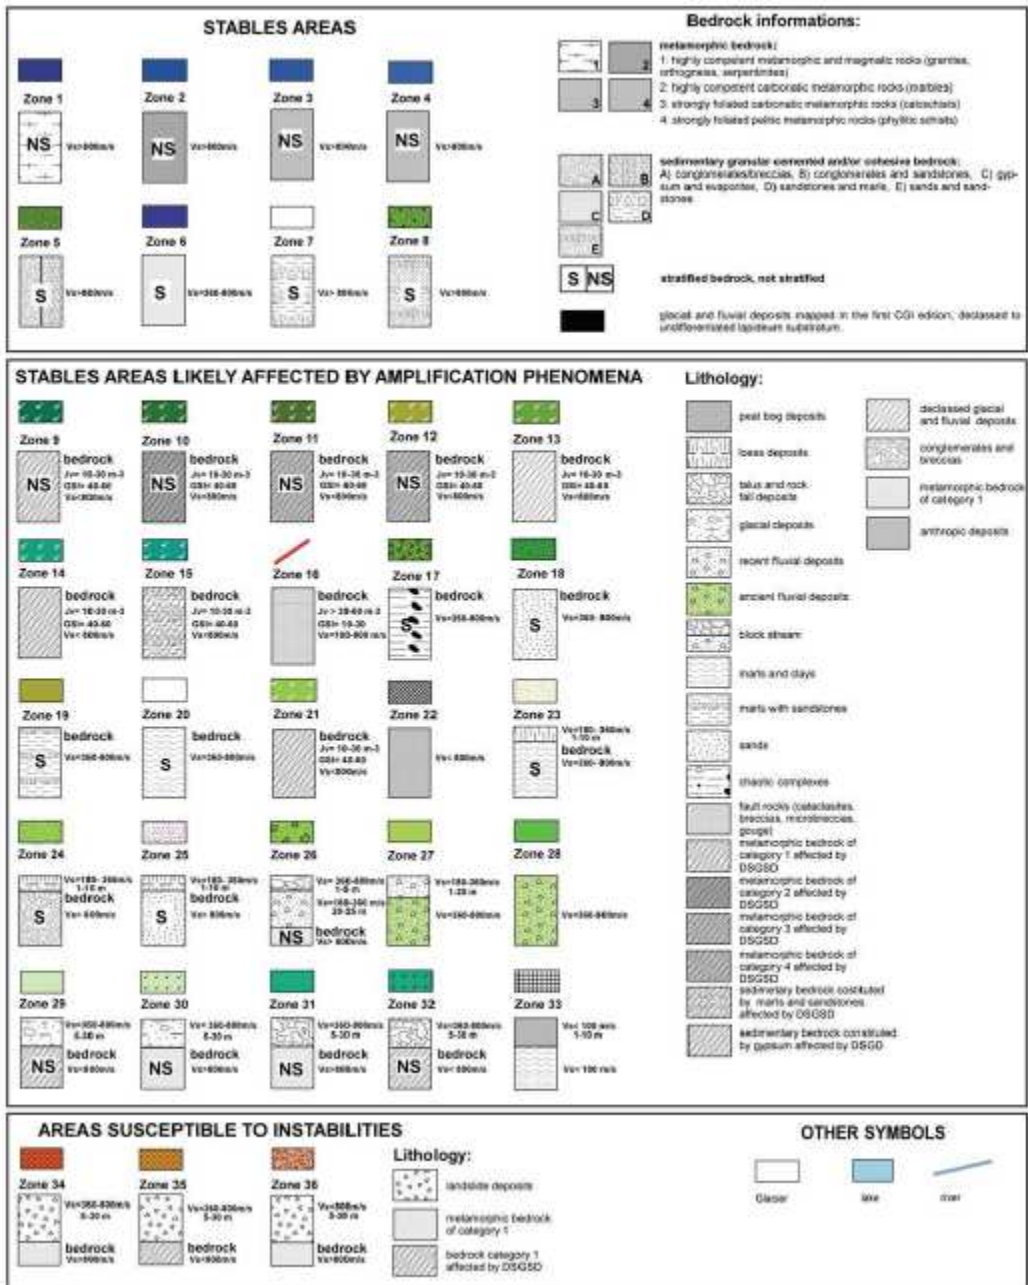


Fig. 2

Fig. 202.2 Legend of Fig. 202.1. In the legend a stratigraphic column has been assigned to each Zone. In the columns the thickness and the Vs values are shown for the different lithologies. The Jv and G.S.I. parameters were also indicated to characterize fractured bedrock (faults, DSGSDs)