

AperTO - Archivio Istituzionale Open Access dell'Università di Torino

## Energy consumption and CO2 analysis of different types of chippers used in wood biomass plantations

### **This is the author's manuscript**

*Original Citation:*

*Availability:*

This version is available <http://hdl.handle.net/2318/1616629> since 2016-11-25T14:01:42Z

*Published version:*

DOI:10.1016/j.apenergy.2015.07.049

*Terms of use:*

Open Access

Anyone can freely access the full text of works made available as "Open Access". Works made available under a Creative Commons license can be used according to the terms and conditions of said license. Use of all other works requires consent of the right holder (author or publisher) if not exempted from copyright protection by the applicable law.

(Article begins on next page)

1 **Energy consumption and CO<sub>2</sub> analysis of different types of chippers used in**  
2 **wood biomass plantations**

3

1 **Abstract**

2 Woodchip is preferred to all biomass forms because it shows standardised sizes and offers  
3 additional benefits in terms of load density. In Europe, a large amount of woodchip is produced by  
4 dedicated cultivations: very Short Rotation Coppice (vSRC) and Short Rotation Coppice (SRC).  
5 The chipping operation can be done during the biomass harvest or some months after tree cutting.  
6 This operation can be performed by different machines: disc chippers, drum chippers, feller-  
7 chippers and grinders.

8         The goal of this work was to determine the energy and the CO<sub>2</sub> emission of different types  
9 of chippers used in biomass comminution produced by poplar vSRC and SRC. All machines were  
10 tested with two different feedstocks: branchwood (treetops and biomass produced by vSRC) and  
11 whole-trees (biomass produced by SRC).

12         Fuel consumption ranged between 14.36 and 59.52 l h<sup>-1</sup> and energy consumption varied  
13 from 0.92 to 0.62 MJ MgDM<sup>-1</sup>, respectively, for branchwood and whole-trees feedstock type. In  
14 addition, an average value of 16.40 kgCO<sub>2</sub>eq MgDM<sup>-1</sup> in branchwood chipping and an average  
15 value of 10.80 kgCO<sub>2</sub>eq MgDM<sup>-1</sup> were obtained in CO<sub>2</sub> assessment.

16         This experiment indicated that self-propelled feller-chippers were significantly more  
17 convenient than “conventional chippers” in biomass comminution produced by dedicated  
18 plantations.

19

20 **Keywords**

21 Chippers, feller-chippers, grinders, fuel consumption, energy cost, CO<sub>2</sub> emission

22

## 1 **1. Introduction**

2

3 Energy produced by renewable sources is considered a valid solution for reducing environmental  
4 pollution caused by the use of fossil fuels [1-2]. In fact, recently, the European Union has provided  
5 incentives for renewable energy production [3]. Among all renewable energy sources, biomass is  
6 the one that has the greatest possibility for fossil fuel substitution [4], especially woodchip [5],  
7 which is preferred over all other biomass forms because it shows standardised sizes and offers  
8 additional benefits in terms of load density [6].

9         The chipping operation can be done during the biomass harvest [7] or some months after  
10 tree cutting [8]. This operation can be performed by two different groups of machines: chippers—  
11 machines using sharp tools (knives) to cut or slice wood; and grinders—machines using blunt tools  
12 (hammers) to smash or crush wood [9].

13         In particular, grinders are used when dealing with contaminated wood, as their blunt tools  
14 are less sensitive to the wearing effect of contaminants [10], but offer a biofuel of low quality level,  
15 unsuitable for use in some plants [11]. In contrast, chippers are exclusively applied to clean wood  
16 and offer a finer and better product [12]. For wood comminution, mobile and stationary chippers are  
17 used, but the former, despite their inferior performance, are more diffused in forestry yards [13].

18

19 In Europe, a large amount of woodchip is produced by dedicated cultivations: Short Rotation  
20 Coppice (SRC). In recent years, the ligno-cellulosic species cultivation has increased because  
21 several farms have inserted SRC in their cultural plans [14]. The main forestry species cultivated in  
22 Europe are poplar (*Populus* spp.) [15], willow (*Salix* spp.) [16], black locust (*Robinia pseudoacacia*  
23 *L.*) [17] and eucalyptus (*Eucalyptus* spp.) [18]. Forestry species can be cultivated with a high  
24 planting density (5,500–14,000 plants ha<sup>-1</sup>) and harvested every 1 to 4 years (very Short Rotation  
25 Coppice—vSRC) or with a lower planting density (1,000–2,000 plants ha<sup>-1</sup>) and harvested ranging  
26 from 5 to 7 years (Short Rotation Coppice-SRC) [19].

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26

Until now many works have focused on various aspects of vSRC or SRC: genotype selection [20], cycle duration [21], biomass production [22], planting techniques [23], weed control and fertiliser effect [24], pesticides application [25], irrigation effect [26], etc. Among all SRC cultural operations, biomass harvesting is considered crucial for a farmer to estimate the economic sustainability of the crop in advance [27]. In fact, recently, the biomass harvesting operation has been studied from different points of view: harvesting techniques [28], economic and energetic costs [29], and wood chip quality [30]. Since biomass harvesting—especially woodchip production [29]—requires approximately 25% of the total SRC energy input [31], it is very important to make a correct choice of the machine used to reduce total energy consumption.

In recent years, some works have focused on the evaluation of chipper performance but unfortunately, all of these have considered only a single machine or various machines but not under the same work conditions (these experimentations are different in terms of feedstock characteristics, materials and methods used) [7, 13, 27]. They do not give sufficient information to compare the performance of different types of chipper machines used in SRC plantations.

In order to overcome this deficiency, a specific study was performed in which the performances of different types of machines used in wood chip production were assessed under the same working conditions. On this basis, the goal of this work was to determine the energy and the CO<sub>2</sub> emission of different types of chippers, usually used in biomass comminution produced by poplar vSRC and SRC, in the same area and using the same feedstocks. In particular, in this study, disc and drum chippers, feller-chippers and grinders were tested with two different feedstocks: branchwood (treetops and biomass produced by vSRC) and whole-tree (biomass produced by SRC).

## **2. Materials**

For this study, eight different machines were chosen. In particular, three of these were powered by the tractor's PTO, while five by an independent engine. All machines required power between 103

1 and 420 kW. In the tests, drum chippers and disc chippers were compared to one grinder and three  
 2 feller-chippers (self-propelled) (Table 1).

3  
 4 Table 1 – Technical characteristics of the chippers and grinder tested

Machine (n°)	Machine (type)	Powered system	Power (kW)	Chipper (type)	Knives ( <u>number</u> )	Mouth feeding size (mm)	Feeding system
1	Feller-chipper	Power Take Off	103	disc	3	250 x 600	automatically
2	Chipper	Power Take Off	130	disc	3	700 x 600	with crane
3	Chipper	Indep. engine	170	drum	4	650 x 900	with crane
4	Feller-chipper	Power Take Off	190	disc	2	700 x 600	automatically
5	Chipper	Indep. engine	200	drum	4	350 x 600	with crane
6	Chipper	Indep. engine	310	drum	2	650 x 900	with crane
7	Grinder	Indep. engine	320	hammer	38	700 x 1500	with crane
8	Feller-chipper	Indep. engine	420	drum	4	300 x 600	automatically

5  
 6 For each machine category an appropriate feeding system was used; self-propelled chippers  
 7 were fed automatically, while “conventional” chippers and the grinder were fed by forestry cranes.  
 8 All stationary machines, in order to reduce the effect of the operator’s training and skill level,  
 9 already well known in other forestry sectors [32], were fed using only one forestry crane driven by  
 10 the same operator. The crane used in the test was a DALLA BONA AS610 fixed to a 4 WD tractor  
 11 (Same ANTARES 110).

12 All machines were tested with only poplar tree species (*Populus x euroamericana*). Hybrid  
 13 poplar is the main species used for the afforestation of north Italian farmland, and it can be  
 14 considered representative of all types of wood used for biomass production [20]. Since the  
 15 feedstock size can cause an effect on machine performance [33], in the trials, two feedstock types  
 16 were used: branchwood (seven year-old treetops and biomass produced by a two year-old very  
 17 Short Rotation Coppice), and whole tree (materials produced by Short Rotation Forestry of seven  
 18 year -olds).

1 In this work, treetops were also considered because in some cases, in order to become  
2 positive, the economic balance of SRC, the basal part of the trunk, up to 4–6 m, is used to produce  
3 industrial wood (OSB panel, packaging) [34].

4 Branchwood had an average diameter (measured to about 10 mm from cutting section) of  
5 between 50 and 120 mm, while the whole tree had a base diameter between 280 and 400 mm.  
6 Due to the limited size of their cutting heads and to the specific cutting system type, not all chipping  
7 machines tested were able to work with the two different feedstocks. Feller-chippers 1 and 8  
8 worked on vSRC plantations (branchwood) only, while feller-chipper 4 worked only in SRC (whole  
9 tree).

10 All wood was freshly processed, with a moisture content of about 55%.

11 Feedstock was made available in large piles (approximately 100 m<sup>3</sup>) built at the field edge.  
12 All machines, except feller-chippers, were stationed near the piles and the forestry crane was used  
13 to move the wood into their feeding device. Feller-chippers worked directly into the plantation  
14 (vSRC and SRC) because the feed of their cutting heads has carried out automatically during  
15 forward speed. The trials were performed on a poplar vSRC, where the distance between the rows  
16 was of 3.00 metres and the distance between plants was of 0.50 metres (density of 6,700 plants per  
17 hectare), and a poplar SRC with same distance between the rows but with a distance between plants  
18 of 3.00 metres (1,600 plants per hectare).

19 Each feller-chipper was tested on a rectangular area of 0.25 hectares with sizes of  
20 approximately 105 metres in length and 24 metres in width (8 rows). In particular, the rows showed  
21 a length of 95 metres and a headland of 5 metres.

22 Chips were blown into three-axle trailers with a capacity of 35 m<sup>3</sup>. Trailers were towed by  
23 farm tractors, so that the whole operation was based exclusively on farming equipment.

24

### 25 **3. Methods**

26

1 The research was conducted in northwestern Italy, near the town of Alessandria, between January  
2 and March 2012.

3 The sampling unit consisted of a full trailer. The experimental design aimed at testing the  
4 effect of machine categories used for woodchip production (disc chipper, drum chipper, feller-  
5 chippers, and grinder) on productivity, energy consumption and CO<sub>2</sub> emission.

6 All machines worked with new knives and hammers.

7

### 8 3.1. Productivity

9

10 Productivity was estimated through a detailed time-motion study conducted at the cycle level [35],  
11 where a full trailer load (35 m<sup>3</sup>) was assumed as a cycle. Cycle times were defined and split into  
12 time elements, following the International Union of Forest Research Organisations (IUFRO)  
13 classification [36]. Productivity of the chipping operation was expressed in terms of mass (Mg DM  
14 h<sup>-1</sup>) and density (m<sup>3</sup>h<sup>-1</sup>). Furthermore, these parameters were also calculated as a function of chipper  
15 engine power (Mg DM h<sup>-1</sup> and m<sup>3</sup>h<sup>-1</sup> x kW). Net chipping productivity for each chipper was  
16 determined considering only productive working time (time which the woodchip produced).

17 Outputs were estimated by measuring the volume and weight of all woodchips produced  
18 during each test. The weight of each trailer was measured by a certified weighbridge with an  
19 accuracy of 10 kg (Ferrero® FL311). Before determining the trailer weight, the load was leveled  
20 equal to tipper topsides. This operation was necessary to obtain density values of biomass.

21 Moisture content determination was conducted with the gravimetric method according to European  
22 Standard CENT/TS 14774 [37], on one sample (1 kg) per trailer, collected in sealed bags and  
23 weighed fresh.

24

### 25 3.2. Energy Consumption

26



1 Energy consumption was calculated considering direct energy consumption (fuel and lubricant  
2 consumption) and indirect energy consumption (energy for the machines manufacturing) [38].  
3 Inputs were transformed into energy unit measures adopting coefficients: machine  $92.0 \text{ MJ kg}^{-1}$  and  
4 equipment  $69.0 \text{ MJ kg}^{-1}$  [39]. Direct energy input was calculated by multiplying the fuel and  
5 lubricant consumption by the respective energy contents:  $37.0 \text{ MJ l}^{-1}$  for fuel [40] and  $83.7 \text{ MJ kg}^{-1}$   
6 for lubricant [39], and then inflating this value by  $1.2 \text{ MJ kg}^{-1}$  as additional fossil energy used in  
7 their production, transportation and distribution [41].

8 In this experimentation, a life of 12,000 hours and an annual utilisation of at least 500 hours  
9 were assumed for tractors (with the tractor also being used for other operations) and a life of 8000  
10 hours and an average annual utilisation of 350 hours was considered for chippers and grinder [29].  
11 Energy spent for maintenance and repair was considered 55% of the energy needed for machine  
12 manufacturing [42].

13 Fuel consumption for the whole chipping operation was determined by a “topping-off  
14 system”. With this method, fuel consumption was determined by refilling the machine tank after  
15 each trailer ( $35 \text{ m}^3$ ) was produced. The tank was refilled using a 2-litre glass pipe with 0.02-litre  
16 graduations, corresponding to the accuracy of measurements [43]. The lubricant consumption was  
17 determined as a function of fuel consumption in a measure of 2% [44].

18

### 19 3.3. Environmental assessment

20

21 The environmental impact of the chipping operations was performed considering  $\text{CO}_2$  emitted by  
22 fuel combustion during the work and  $\text{CO}_2$  emitted during machinery production. On the basis of  
23 research published, an amount of  $3.76 \text{ kg}$  of  $\text{CO}_2$  per litre of diesel fuel [45-46] and an average  $2.94$   
24  $\text{kg}$  of  $\text{CO}_2$  for each  $\text{kg}$  of lubricant [47] emitted in the atmosphere were considered. Moreover, the  
25 environmental impact required for maintenance was calculated considering an emission factor of  
26  $0.159 \text{ kg CO}_2$  per  $\text{MJ}$  of energy content in the machines [29].

1           The collected data were processed with Microsoft Excel software and analysed with SPSS  
2 21 (2014) advanced statistics software to determine the statistical significance of the differences  
3 between the treatments using ANOVA. A statistical GLM approach considering the machinery's  
4 nominal power effect on the different parameters analysed in this experimentation was not carried  
5 out because the machine characteristics were implicitly inserted in the information related to the  
6 unit of nominal power.

7

## 8 **4. Results**

9

### 10 4.1. Productivity

11

12 In branchwood chipping, the higher value of productivity ( $102.67 \text{ m}^3\text{h}^{-1}$  equal to  $16.29 \text{ Mg DM h}^{-1}$ )  
13 was obtained using machine 8, whereas the lowest value was obtained using machine 1 ( $19.33 \text{ m}^3\text{h}^{-1}$   
14 equal to  $3.06 \text{ Mg DM h}^{-1}$ ). Net productivity expressed for each nominal power unit of the machine  
15 ranged between 30 and 38  $\text{kg DM h}^{-1} \times \text{kW}$ -values always obtained by machines 1 and 8 (Table 2).  
16 However, in whole tree chipping, the higher value of the working rate ( $112.67 \text{ m}^3\text{h}^{-1}$  equal to  
17  $18.14 \text{ Mg DM h}^{-1}$ ) was obtained using machine 7, whereas the lower values ( $34.67 \text{ m}^3\text{h}^{-1}$  equal to  
18  $6.07 \text{ Mg DM h}^{-1}$ ) with machine 4. A higher value of net productivity expressed for each nominal  
19 power unit of the machine was obtained with machines 5 and 6 ( $60 \text{ kg DM h}^{-1} \times \text{kW}$ ), whereas a  
20 lower value ( $32 \text{ kg DM h}^{-1} \times \text{kW}$ ) with machine 4 (Table 2). The lower value obtained from  
21 machine 4 is related to its discontinuous work due to manoeuvres required by its positioning near  
22 the trees.

23 The productivity obtained in whole tree chipping ( $0.053 \text{ Mg DM h}^{-1} \times \text{kW}$ ) was about 30% higher  
24 than that obtained in branchwood comminution (Table 2).

1 During data interpretation, if the values of machine 4 are not considered with regard to its  
 2 peculiarities, it is possible to assert that productivity is affected only by feedstock size and not by  
 3 different comminution systems, powered systems and feeding systems (Table 2).

4  
 5 Table 2 – Productivity and statistical analysis of the all machines for each feedstock tested

Feedstock	Machine	Productivity				Specific productivity (*)			
		(m <sup>3</sup> h <sup>-1</sup> )		(Mg DM h <sup>-1</sup> )		(m <sup>3</sup> h <sup>-1</sup> kW <sup>-1</sup> )		(Mg DM h <sup>-1</sup> kW <sup>-1</sup> )	
		Mean	SD	Mean	SD	Mean	SD	Mean	SD
Branchwood	1	19.33	0.58	3.06	0.09	0.19a	0.005	0.030a	0.0007
	2	27.67	1.53	4.36	0.24	0.21a	0.005	0.034a	0.0008
	3	37.67	0.58	5.93	0.09	0.22a	0.003	0.035a	0.0005
	5	39.33	1.53	6.88	0.27	0.20a	0.005	0.034a	0.0009
	6	70.33	2.08	11.47	0.06	0.23a	0.003	0.037a	0.0002
	7	75.00	1.00	10.77	0.21	0.23a	0.002	0.034a	0.0006
	8	102.67	4.04	16.29	0.64	0.24a	0.006	0.038a	0.0010
	Whole-trees	2	43.00	2.00	7.22	0.34	0.33b	0.009	0.056b
3		55.33	4.16	9.49	0.71	0.33b	0.024	0.056b	0.0041
4		34.67	1.53	6.07	0.27	0.18a	0.004	0.032a	0.0006
5		68.00	4.00	11.90	0.70	0.34b	0.012	0.060b	0.0020
6		110.00	4.36	18.48	0.73	0.35b	0.005	0.060b	0.0008
7		112.67	0.58	18.14	0.09	0.35b	0.001	0.057b	0.0001

Notes: (\*) Values refer to a nominal power of the machine; different letters (a, b,) indicate significant differences between machines for  $\alpha = 0.05$


6

## 7 4.2. Fuel consumption

8

9 Fuel consumption ranged between 14.36 and 59.52 l h<sup>-1</sup> as a function of the nominal power of  
 10 machines and the feedstock type (Table 3). Hourly fuel consumption increased in accordance with  
 11 the power engine with a linear trend independently of the machine and feedstock types (Fig. 1).

12

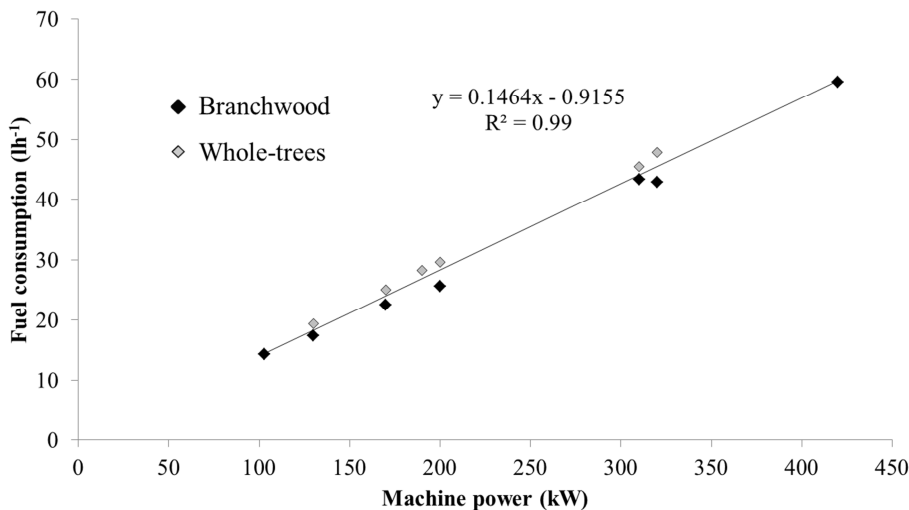

Notes: values reported in this figure are a mean of three replicates

1 Figure 1 – Fuel consumption versus nominal machine power

2

3 Specific fuel analysis showed different values as a function of the parameter considered. Referring  
 4 fuel consumption to biomass produced, independently of whether the latter is expressed in terms of  
 5 weight or volume, higher values ( $3.90 \text{ l MgDM}^{-1}$  or  $0.63 \text{ l m}^{-3}$ ) were obtained in branchwood  
 6 comminution, while lower values were observed in whole tree chipping ( $2.60 \text{ l MgDM}^{-1}$  or  $0.44 \text{ l}$   
 7  $\text{m}^{-3}$ ). Feller-chippers powered by tractors (machines 1 and 4) showed higher values ( $4.67 \text{ l MgDM}^{-1}$   
 8 or  $0.79 \text{ l m}^{-3}$ ) when compared to other machines independently of the feedstock considered. That  
 9 statistical difference was not found when referring the specific fuel consumption to engine nominal  
 10 power. In fact, for each feedstock tested, all machines showed similar values. In particular, average  
 11 values of  $113$  and  $123 \text{ g kW h}^{-1}$  were observed in branchwood and whole tree chipping respectively  
 12 (Table 3).

1 Table 3 – Fuel consumption during branchwood and whole-tree chipping

Feedstock	Machine	Power (kW)	Fuel measured (lh <sup>-1</sup> )		Specific fuel consumption		
			Mean	SD	1 Mg DM <sup>-1</sup>	l m <sup>-3</sup>	g <sup>(*)</sup> kW h <sup>-1</sup>
Branchwood	1	103	14.36	0.61	4.69c	0.74c	116b
	2	130	17.45	0.54	4.00b	0.63b	112b
	3	170	22.52	0.89	3.80b	0.60b	110b
	5	200	25.68	1.26	3.73b	0.65b	107ab
	6	310	43.32	0.84	3.78b	0.62b	116b
	7	320	42.86	0.76	3.98b	0.57b	111b
	8	420	59.52	0.98	3.65b	0.58b	118b
	Whole-trees	2	130	19.40	1.14	2.69a	0.45a
3		170	25.05	0.78	2.64a	0.45a	123c
4		190	28.27	0.86	4.66c	0.82c	124c
5		200	29.62	2.15	2.49a	0.44a	123c
6		310	45.50	1.36	2.46a	0.41a	122c
7		320	47.86	0.68	2.64a	0.42a	124c

Notes: (\*) Value calculated considering a diesel fuel density of 0.832 g cm<sup>-3</sup>; different letters (a, b, etc.) indicate significant differences between treatments for  $\alpha = 0.05$

2

3

#### 4 4.3. Energy evaluation

5

6 Energy consumption in chipping operations resulted independently of the nominal power engine  
7 and in inverse relation to feedstock size comminuted. In fact, the higher value (0.92 MJ MgDM<sup>-1</sup>)  
8 and the lower value (0.62 MJ MgDM<sup>-1</sup>) were obtained from branchwood and from whole-tree  
9 chipping, respectively. The highest values (1.19 MJ MgDM<sup>-1</sup>), also for this parameter, were  
10 observed in chippers powered by tractors (Table 4). In addition, this evaluation pointed out that  
11 chipping operations required an average energy consumption of 6.50 MJ for each kW of chipper  
12 nominal power independently of machine type, feeding system and feedstock size. All machines  
13 showed an incidence of direct energy consumption on total energy consumption between 80 and  
14 90%; no statistically significant difference was observed for different feedstock considered (Table  
15 4).

1

2 Table 4 – Energy consumption in chipping operation

Feedstock	Machine	Energy consumption			Specific energy consumption		
		Direct (MJ h-1)	Indirect (MJ h-1)	Total (MJ h-1)	Energy per nominal power (MJ kW-1)	Incidence of direct on total (%)	Energy per biomass produced (MJ MgDM-1)
Branchwood	1	555.4	137.4	692.8	6.71a	81.0	1.20c
	2	674.9	162.2	837.1	6.44a	80.6	0.98b
	3	870.9	108.7	979.7	6.13a	88.9	0.88b
	5	993.1	251.3	1244.5	6.21a	79.8	0.96b
	6	1675.4	213.9	1889.3	6.11a	88.7	0.91b
	7	1657.6	303.0	1960.6	6.13a	84.5	0.87b
	8	2301.9	352.9	2654.8	6.32a	86.7	0.90b
	Whole-trees	2	750.3	162.2	912.5	6.90ab	82.2
3		968.8	108.7	1077.5	6.34a	89.0	0.61a
4		1093.3	251.3	1344.6	7.01ab	81.3	1.18c
5		1145.5	213.9	1359.4	6.80a	84.3	0.61a
6		1759.7	267.4	2027.0	6.54a	86.8	0.59a
7		1850.9	303.0	2154.0	6.73a	85.9	0.62a

3 Notes: different letters (a, b, etc.) indicate significant differences between treatments for  $\alpha = 0.05$ 

4

5

## 6 4.4. Environmental assessment

7

8 Data processing highlighted an average value of 16.40 kgCO<sub>2</sub>eq MgDM<sup>-1</sup> (2.61 kgCO<sub>2</sub> m<sup>-3</sup>) in  
9 branchwood chipping and an average value of 10.80 kgCO<sub>2</sub>eq MgDM<sup>-1</sup> (1.82 kgCO<sub>2</sub> m<sup>-3</sup>) in whole-  
10 tree chipping. Also, in this evaluation the worst results were obtained by the chippers powered by  
11 the tractor. In fact, independently of feedstock considered, an amount of approximately 20.30  
12 kgCO<sub>2</sub>eq MgDM<sup>-1</sup> (3.38 kgCO<sub>2</sub> m<sup>-3</sup>) was obtained by a chipper powered by tractors (Table 5).  
13 No statistical differences were found between machines equipped with different comminution  
14 system and feeding system used.

15

16 Table 5 – CO<sub>2</sub> emission during branchwood and whole-tree chipping

Feedstock	Machine	CO <sub>2</sub> eq emission	
		kgCO <sub>2</sub> eq MgDM <sup>-1</sup>	kgCO <sub>2</sub> m <sup>-3</sup>
Branchwood	1	20.45c	3.24c
	2	17.38b	2.74b
	3	17.26b	2.72b
	5	16.31b	2.85b
	6	15.48b	2.52b
	7	16.78b	2.41b
	8	15.18b	2.41b
	Whole-trees	2	11.53a
3		10.73a	1.84a
4		20.12c	3.52c
5		10.52a	1.84a
6		10.22a	1.72a
7		11.02a	1.77a

Notes: different letters (a, b, etc.) indicate significant differences between treatments for  $\alpha = 0.05$

## 5. Discussion

During biomass plantation harvesting, independent of feeding system types used in chipping operations (automatically or with forestry crane), the supporting work time and delay (unproductive time) were low (8% of total working time). This value is similar to that obtained in other work performed using traditional chippers [48], but is much lower (four times) in comparison to a self-propelled forager modified for wood chipping tested on a poplar plantation of 270 mm diameter [49]. This difference could be attributed to the lower tree sizes and to the optimal conditions (large square and big head field) in which the machines worked during the trials. Overall it is very important to highlight that working time can also be linked to the operator's training and skill level [50].

Productivity is influenced particularly by the rotation length of the SRC harvested because a different plantation edge causes a different feedstock type (Table 6). It is lower when the wood assortment processed is characterised by a small size (branchwood or vSRC). This effect may be attributed to low feedstock density and to greater difficulty in its handling. This wood assortment

1 type can also cause some problems in feeding operations, where the branches can get stuck in the  
2 feeding mouth of chippers. These operative problems were also shown in other studies [51-52].

3 Independent of the type of machine considered (feller-chipper, chipper or grinder), the  
4 working rate results are similar for all machines with similar nominal engine power; different values  
5 are obtained only with different feedstock. This is confirmed in the database compiled by Spinelli  
6 and Magagnotti [13] and in the study conducted by Spinelli et al [51]. The minor differences  
7 between the values could be attributed to different feed systems (automatic or with crane) and  
8 operator skill. In addition, no significant difference was found by adopting a different comminution  
9 system (disc, drum, hammer).

10 In absolute terms, fuel consumption obtained in this work was in line with the values  
11 reported by Nati et al. [53] (0.8 to 1.6 l t<sup>-1</sup>) and by Spinelli et al. [51] (1.7-1.8 l t<sup>-1</sup> for poplar).  
12 Moreover, these results are similar to those assumed for a life cycle assessment of fuel wood chip  
13 production from willow [54] and eucalyptus [55] biomass plantations.

14 Furthermore, this study highlights that in biomass comminution, independently of the  
15 machine type used (self-propelled chipper, feller-chipper or grinder) and feedstock size  
16 (branchwood or whole-trees), fuel consumption is strictly related to the engine's nominal power of  
17 the chipping machine used. A similar trend was also found by Spinelli and Hartsough [56] during a  
18 survey of chipping operations performed with conventional chippers. Since fuel consumption is  
19 proportional to engine load, these results could be linked to max rotation speed of the engine used to  
20 power the machine [57]. In fact, at high rotation speed, eventual change of load due to resistance  
21 forces of different feedstock size is better endured by the engine [58]. In addition, when the  
22 chippers are equipped with a no-stress electronic device (a device to control the forward speed of  
23 the feeding material in function of engine speed), in order to obtain a high woodchip quality, the  
24 engine works with a constant speed, and for this reason, with a fairly constant load for all feedstock  
25 size variations as well [51]. Also for this parameter, statistical analysis showed no significant



1 difference between machines equipped with different comminution system and feeding system.  
2 Differences were observed only when machines powered by PTO of the tractor were considered.

3 Referring the energy consumption in biomass comminution to nominal power of machines  
4 used, a similar value was obtained for all machines tested (6.50 MJ for each kW) independently of  
5 machine type, feeding system and feedstock size. However, relating energy consumption to  
6 woodchips produced, the highest mean value (0.92 MJ MgDM<sup>-1</sup>) was observed during the  
7 comminution of feedstock of small size (branchwood), and the lowest mean value (0.62 MJ MgDM<sup>-1</sup>)  
8 during whole-tree chipping. Also for this parameter, these results can be attributed to the constant  
9 engine load guaranteed by a no-stress device and to different productivity that is obtainable using  
10 different feedstocks. The highest absolute value (1.18 MJ MgDM<sup>-1</sup>) observed in chipper 4 powered  
11 by PTO of the tractor could be related to a lower working rate and lower efficiency of the power  
12 transmission system. In fact, when using the PTO and a hydraulic power transmission system, part  
13 of the power provided by the engine is absorbed by the cardan shaft used to couple the chippers to  
14 tractors and the pump used to maintain the oil under pressure [59].

15 In general terms, the energy required by a chipping operation is very low (0.6–1.2 %) when  
16 compared with the energy value of the woodchip produced (1880 MJ MgDM<sup>-1</sup>). These results are  
17 comparable to those found by other researchers in similar plantations [60-61]. In addition, this  
18 study indicates an average incidence of about 85% of the direct energy (fuel and lubricant  
19 consumption) on total energy required. These results are similar to those calculated for woodchip  
20 transportation [62] and biomass harvesting [29].

21 Regarding CO<sub>2</sub> emission during biomass chipping, data processing highlights a different value in  
22 function of feedstock size. Higher results were obtained in whole-tree comminution (16.40 kg  
23 CO<sub>2</sub>eq MgDM<sup>-1</sup>) compared to 10.80 kgCO<sub>2</sub>eq MgDM<sup>-1</sup> emitted during branchwood chipping. This  
24 trend can be caused by different chippers' productivity. In fact, whole-trees have highlighted higher  
25 wood chip production in the unit time. These values are in line with those found during a life cycle  
26 assessment of chip production from eucalypt forestry residues [55] and poplar SRC [60,63].

1 Also in this case, the chippers powered by a tractor showed the worst results independently of  
2 feedstock physical characteristics ( $20.30 \text{ kgCO}_2\text{eq MgDM}^{-1}$ ). This aspect is very important and it  
3 should not be underestimated because the  $\text{CO}_2$  emission, as well as being detrimental to the  
4 environment, is also harmful for the operators [64].

5 Finally, the study highlighted that the cutting operation performed in simultaneity with the  
6 chipping operation (feller-chippers) does not considerably reduce chipping operation productivity  
7 and does not influence fuel and energy consumption. These results again increase the high  
8 performance of self-propelled feller-chippers that in previous tests have shown advantages in  
9 economy [27] and soil compaction [28] when compared to “conventional” machines used in  
10 biomass harvesting and chipping. Nevertheless, machine 4 (feller-chipper that worked only in SRC-  
11 plantation with a medium-length rotation) showed a low working rate because its working process  
12 was not continuous due to difficulty in cutting trees with large diameters (up to 400 mm). In fact,  
13 under these conditions, manual cutting and harvesting can be economically competitive compared  
14 to mechanical systems [65].

15

## 16 **6. Conclusions**

17

18 In conclusion, the data processed showed that all parameters analysed in this study (productivity,  
19 energy consumption, and  $\text{CO}_2$  emitted) are mainly affected by feedstock size and powering system  
20 of the machines used. Different comminution systems (disc, drum, and hammers) and feeding  
21 systems (automatic and with forestry cranes) do not significantly influence the values.

22 In addition, the study highlighted a significant advantage in the use of self-propelled feller-  
23 chippers because these machines, although performing two operations simultaneously (cutting trees  
24 and chipping wood) show a similar performance to “conventional chippers”.

1           Nevertheless, feller-chippers powered by PTO of tractors do not seem to be a good solution  
2 because they have shown the worst results in terms of productivity, energy consumption, and CO2  
3 emitted.

4           On the base of the results obtained in this study, in order to reduce the environmental impact  
5 of the chipping operations, especially GHG emission, manufacturers should focus on machines with  
6 an independent engine, while farmers should plan their crops with long harvest cycles (seven years).

7

8

## 9 References

- 10 [1] Gomez A, Rodriguez M, Montanes C, Dopazo C, Fueyo N. The technical potential of first-  
11 generation biofuel obtained from energy crops in Spain. *Biomass Bioenerg* 2011;35:2143-55.
- 12 [2] Benoist A, Dron D, Zoughaib A. Origins of the debate on the life-cycle greenhouse gas  
13 emissions and energy consumption of first-generation biofuels e A sensitive analysis approach.  
14 *Biomass Bioenerg* 2012;40:133-42.
- 15 [3] Tol RS. A cost benefit analysis of the EU 20/20/2020 package. *Energy Policy* 2012;49:288-95.
- 16 [4] Okello C, Pindozi S, Faugno S, Boccia L. Development of bioenergy technologies in Uganda:  
17 a review of progress. *Renewable and Sustainable Energy Reviews* 2013;18:55-63.
- 18 [5] Stupak A, Asikainen A, Jonsel M, Karlton E, Lunnan Al. Sustainable utilization of forest  
19 biomass for energy. Possibilities and problems: policy, legislation, certification and  
20 recommendations and guidelines in the Nordic, Baltic and Other European countries. *Biomass*  
21 *Bioenerg* 2007;31:666-84.
- 22 [6] Bjorheden R. Optimal point of comminution in the biomass supply chain. Proceedings of the  
23 Nordic-Baltic Conference on Forest Operations, Copenhagen23-25 september 2008. danish  
24 Forest and landscape, Copenhagen Denmark.
- 25 [7] Spinelli R, Nati C, Magagnotti N. Using modified foragers to harvest short-rotation poplar  
26 plantations. *Biomass Bioenerg* 2009;33:817-21.

- 1 [8] Pari L, Civitarese V, Giudice AD, Assirelli A, Spinelli R, Santangelo E. Influence of chipping  
2 device and storage method on the quality of SRC poplar biomass. *Biomass Bioenergy*  
3 2013;51:169-76.
- 4 [9] Pottie M., Guimier D. Preparation of forest biomass for optimal conversion. FERIC Special  
5 Report SR-32, Pointe Claire, Canada. 1985. 122 p.
- 6 [10] Goldstein N, Diaz LF. Size reduction equipment review. *BioCycle* 2005;46(1):48-53.
- 7 [11] Strelher A. Technologies of wood combustion. *Ecological Engineering* 2000;16: 25-40.
- 8 [12] Spinelli R, Ivorra L, Magagnotti N, Picchi G. Performance of a mobile mechanical screen to  
9 improve the commercial quality of wood chips for energy. *Bioresource Technology*  
10 2011;102:7366-70.
- 11 [13] Spinelli R, Magagnotti N. Comparison of two harvesting systems for the production of forest  
12 biomass from the thinning of *Picea Abies* plantations. *Scandinavian Journal of Forest Research*  
13 2010;25:69-77.
- 14 [14] Spinelli R, Nati C, Magagnotti N. Harvesting short-rotation poplar plantations for biomass  
15 production. *Croat J For Eng* 2008;29(2):129-39.
- 16 [15] Manzone M, Airoldi G, Balsari P. Energetic and economic evaluation of a poplar cultivation  
17 for the biomass production in Italy, *Biomass and Bioenergy* 2009;33:1258-64.
- 18 [16] Ericsson K, Rosenqvist H, Ganko E, Pisarek M, Nilsson L. An agro-economic analysis of  
19 willow cultivation in Poland. *Biomass Bioenergy* 2006;30:16-27.
- 20 [17] Manzone M, Bergante S, Facciotto G. Energetic and economic sustainability of woodchip  
21 production by black locust (*robinia pseudoacacia* L.) plantations in Italy. *Fuel* 2015;140:555-  
22 60.
- 23 [18] De Morogues F, The NN, Berthelot A, Melun F. Thoughts on the profitability of short and very  
24 short rotation coppice cycles with eucalyptus and poplar. *Rev For Francaise* 2011;63(6):705-  
25 21.

- 1 [19] Testa R, Di Trapani AM, Foderà M, Sgroi F, Tudisca S. Economic evaluation of introduction  
2 of poplar as biomass crop in Italy. *Renewable and Sustainable Energy Reviews* 2014;38:775-  
3 80.
- 4 [20] Rosso L, Facciotto G, Bergante S, Vietto L, Nervo G. Selection and testing of *Populus alba*  
5 and *Salix* spp. as bioenergy feedstock: Preliminary results. *Applied Energy* 2013;102:87-92.
- 6 [21] Al Afas N, Marron N, Van Dongen S, Laureysens I, Ceulemans R. Dynamics of biomass  
7 production in a poplar coppice culture over three rotations (11 years). *For Ecol Manag*  
8 2008;255(5-6):1883-91.
- 9 [22] Nasso O Di Nassi N, Guidi W, Ragaglini G, Tozzini C, Bonari E. Biomass production and  
10 energy balance of a 12-years-old short-rotation coppice poplar stand under different cuttings  
11 cycles. *Bioenergy* 2010;2:89-97.
- 12 [23] Manzone M, Balsari P. Planters performance during a very Short Rotation Coppice planting,  
13 *Biomass Bioenerg* 2014;67:188-92.
- 14 [24] Welham C, Van Rees K, Seely B, Kimmins H. Projected long term productivity in  
15 Saskatchewan hybrid poplar plantations: weed competition and fertilizer effects. *Can J For Res*  
16 2007;37:356-70.
- 17 [25] Balasus A, Bischoff WA, Schwarz A, Scholz1 V, Kern1 J. Nitrogen fluxes during the initial  
18 stage of willows and poplars in short rotation coppices. *J. Plant Nutr. Soil Sci.* 2012;175:729-  
19 38.
- 20 [26] Jerbi, A., Nissim, W.G., Fluet, R., Labrecque, M. Willow Root Development and Morphology  
21 Changes Under Different Irrigation and Fertilization Regimes in a Vegetation Filter. *Bioenergy*  
22 *Research* 2015 (in press).
- 23 [27] Vanbeveren Spp, Schweier J, Berhongaray G, CeulemansR. Operational short rotation woody  
24 crop plantations: manual or mechanized harvesting? *Biomass Bioenerg* 2015;72:8-18.
- 25 [28] Pecenka R, Ehlert D, Lenz H. efficient harvest lines for Short Rotation Coppices (SRC) in  
26 *Agriculture and Agroforestry. Agronomy Research* 2014;12(1):151-60.

- 1 [29] Fiala M, Becenetti J. Economic, energetic and environmental impact in short  
2 rotation coppice harvesting operations. *Biomass Bioenerg* 2012;42:107-13.
- 3 [30] Civitarese V, Faugno S, Pindozi S, Assirelli A, Pari L. Effect of short rotation coppice  
4 plantation on the performance and chips quality of a self-propelled harvester. *Biosystem*  
5 *engineering* 2015;129:370-7.
- 6 [31] Manzone M, Bergante S, Facciotto G. Energy and economic evaluation of a poplar plantation  
7 for woodchips production in Italy, *Biomass Bioenerg* 2014;60:164-70.
- 8 [32] Lindroos O. The Effects of increased mechanization on time consumption in small-scale  
9 firewood processing. *Silva Fennica* 2008;42(5):791-805.
- 10 [33] Liss JE. Power requirement and energy consumption in fuel-chip production using a tractor-  
11 mounted chipper. Department of Operational Efficiency, Swedish University of Agricultural  
12 Sciences. Licentiate thesis.1987.
- 13 [34] Coaloa D, Nervo G., Scotti A. Multi-purpose poplar plantations in Italy. In: *Improving Lives*  
14 *with Poplars and Willows. Abstracts of submitted papers. 24th Session of the International*  
15 *Poplar Commission, Dehradun, India, 30 October-2 November 2012. Working Paper IPC/11*  
16 *FAO, Rome, Italy.*
- 17 [35] Magagnotti N, Spinelli R. COST action FP0902 e good practice guideline for biomass  
18 production studies. Florence, Italy. 2012. CNR IVALSA, ISBN 978-88-901660-4-4; pp 41.
- 19 [36] Bjorheden R, Apel K, Shiba M, Thompson MA. IUFRO forest work study nomenclature.  
20 Garpenberg: Swedish University of Agricultural Science, Dept. of Operational Efficiency. 1995.  
21 p. 16.
- 22 [37] UNI EN 14774-2. Solid biofuels, determination of moisture content – oven dry method, Part 2:  
23 total moisture - simplified method 2010.
- 24 [38] Mikkola HJ, Ahokas J. Indirect energy input of agricultural machinery in bioenergy  
25 production. *Renewable Energy* 2010;35:23-8.

- 1 [39] Jarach M. On equivalence values for analysis and balance energy in agriculture (in Italian). Riv  
2 Ing Agr 1985;2:102-14.
- 3 [40] A. Bailey, W. Basford, N. Penlington, J. Park, J. Keatinge, T. Rehman, R. Tranter, C. Yates. A  
4 comparison of energy use in conventional and integrated arable farming in the UK, Agriculture  
5 Ecosystems Environment 2003;97:241-53.
- 6 [41] G. Pellizzi. Use of energy and labour in Italian agriculture. Journal of Agricultural Engineering  
7 Research 1992;52:111-19.
- 8 [42] Fluck RC. Energy sequestered in repairs and maintenance of agricultural machinery. Trans  
9 ASAE May-June 1985;28(3).
- 10 [43] Manzone M, Spinelli R. Efficiency of small-scale firewood processing operations in Souther  
11 Europe. Fuel Processing Technology 2014;122:58-63.
- 12 [44] Piccarolo P. Selection criteria and management of agricultural machinery (in Italian).  
13 Macchine e Motori Agricoli 1989;12:28-32.
- 14 [45] Soane BD, Ball BC, Arvidson J, Basch G, Moreno F, Roger-estrade J. No-till in northern,  
15 western and south-western Europe: a review of problems and opportunities for crop production  
16 and the environment. Soil Till Res 2012;118:66-87.
- 17 [46] Sarauskis E, Buragiene S, Masilionytė L, Romaneckas K, Avizienytė D, Sakalauskas A.  
18 Energy balance, costs and CO<sub>2</sub> analysis of tillage technologies in maize cultivation. Energy  
19 2014;69:227-35.
- 20 [47] Lal R. Carbon emissions from farm operations. Environ Int 2004;30:981-90.
- 21 [48] Spinelli R, Visser R. Analyzing and estimating delays in wood chipping operations. Biomass  
22 Bioenerg 2009;33:429-33.
- 23 [49] Manzone M, Spinelli R. Wood chipping performance of a modified forager. Biomass Bioenerg  
24 2013;55:101-6.
- 25 [50] Purfurst FT, Erler J. The precision of productivity models for the harvester – do we forget the  
26 human factor? In: Precision Forestry in Plantations, semi-Natural and Natural Forests.

- 1        Proceeding of the International Precision Forestry Symposium. Stellenbosch University, South  
2        Africa, 5-10 March 2006:465-75.
- 3        [51] Spinelli R., Ivorra L., Magagnotti N., Picchi G. Performance of a mobile mechanical screen to  
4        improve the commercial quality of wood chips for energy. *Bioresource Technology*  
5        2011;102:7366-70.
- 6        [52] Assirelli A., Civitarese V., Fanigiulo R., Pari L., Pochi D., Santangelo E., Spinelli R. Effect of  
7        piece and tree part on chipper performance. *Biomass Bioenerg* 2013;54:77-82.
- 8        [53] Nati C., Spinelli R., Fabbri P. Wood chips size distribution in relation to blade wear and screen  
9        use. *Biomass Bioenerg* 2010;34:583-87.
- 10       [54] Murphy F, Devlin G, McDonnell K. Energy requirement and environmental impacts associated  
11       with the production of short rotation willow (*Salix* sp) chip in Ireland. *GCB Bioenergy*  
12       2014;6:727-39.
- 13       [55] Diaz AC. Life cyce assessment of fuel chip production from eucalypt forest residues.  
14       *International Journal of Life Cycle Assessment* 2014;19:705-17.
- 15       [56] Spinelli R, Hartsough B. A survey of Italian chipping operations. *Biomass Bioenerg*  
16       2001;21(6):433-44.
- 17       [57] Mufti RA, Priest M. Effect of engine operating conditions and lubricant rheology on the  
18       distribution of losses in an internal combustion engine. *Journal of tribology* 2009;131(4):1-9.
- 19       [58] Singh D, Gu F, Fieldhouse JD, Singh N, Singal SK. Prediction and analysis of engine friction  
20       power of a diesel engine influenced by engine speed, load, and lubricant viscosity. *Advances in*  
21       *Tribology* 2014;928015:9 pp.
- 22       [59] Lin T, Buckmaster DR. Evaluation of an optimized engine-fluid power drive system to replace  
23       mechanical tractor power take-offs. *Transactions of the ASAE*1996;39(5):1605-10.
- 24       [60] San Miguel G, Corona B, Ruiz D, Landholm D, Laina R, Tolosana E, Sixto H, Canellas I.  
25       Environmental, energy and economic analysis of a biomass supply chain based on a poplar  
26       short rotation coppice in Spain. *Journal of Cleaner production* 2015; in press.



- 1 [61] Djomo SN, El Kasmioui O, Ceulemans R. Energy and greenhouse gas balance of bioenergy  
2 production from poplar and willow: a review. *GCB Bioenergy* 2011;3:181-97.
- 3 [62] Manzone M, Balsari P. The energy consumption and economic costs of different vehicles use  
4 in transporting woodchips. *Fuel* 2015;139:511-15.
- 5 [63] Roedl A. Production and energetic utilization of wood from short rotation coppice - a life cycle  
6 assessment. *The International Journal of Life Cycle Assessment* 2010;15(6):567-78.
- 7 [64] Magagnotti N, Picchi G, Sciarra G, Spinelli R. Exposure of mobile chipper operators to diesel  
8 exhaust. *Ann Occup Hyg* 2014;58(2):217-26.
- 9 [65] Hauk S, Wittkopf S, Knobe T. Analysis of commercial short rotation coppices in Bavaria,  
10 southern Germany. *Biomass Bioenerg* 2014;67:401-12.